

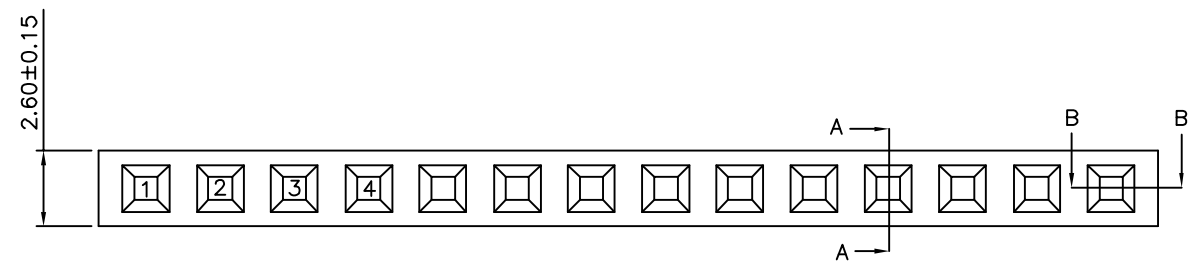


Recommended P.C.B Layout(Top Side)
(PCB Board Tolerance±0.05)

△ SPECIFICATION
 Current Rating:3.0 Amp
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 Insulator:PA9T+30%G.F.(UL94V-0),Black
 RoHS Compliant



- △ F D 50 - 1 X XX - H H**
 (1)(2)(3) (4) (5) (6)(7)
- (1) F:2.54mm Female Header
 - (2) D:DIP Straight
 - (3) 50:5.0mm Insulator Height
 - (4) 1:Single Row
 - (5) XX:No. Of Position/Per Row
 - (6) H:Withstand High Temperature Soldering
 - (7) H:RoHS Compliant

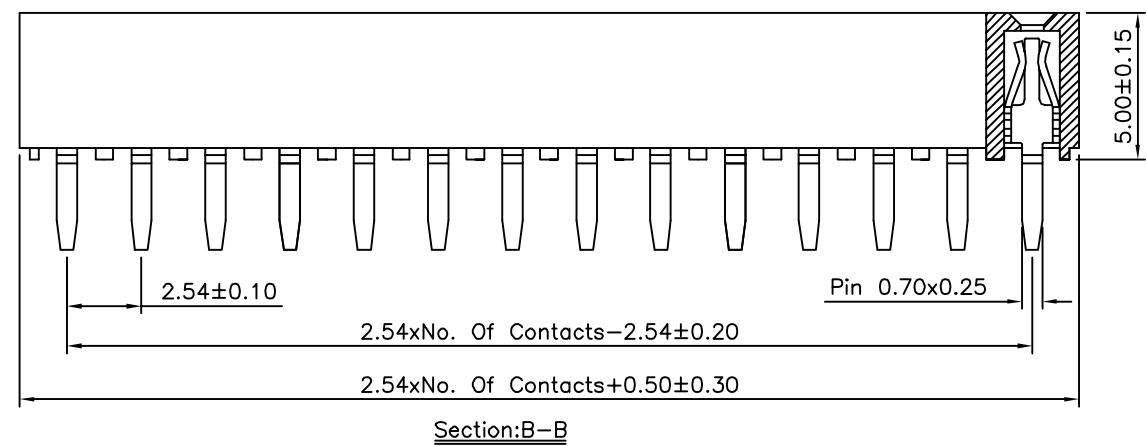

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.40 .XX ±0.25 .XXX ±0.15 ANG. ±3°
PART No. FD50-1XXX-HH		EMILY		
DRAWING No. FD50-1XXX-HH		CHECKED BY HZF		
SCALE		DRAWING BY HYY		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	02/01/2013
△ A0		NEW RELEASE	HZF	03/11/2009