

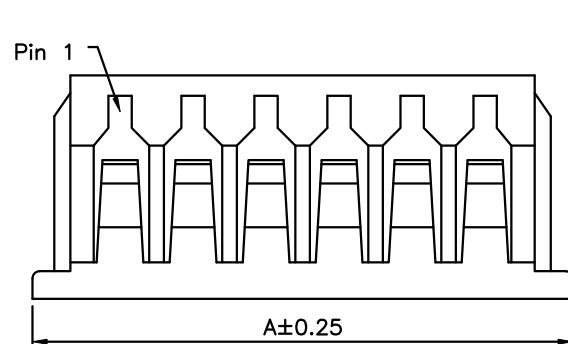


SPECIFICATION

Current Rating:1.0A AC/DC
Voltage Rating:125V AC/DC
Contact Resistance:20 Milliohms Max.
Withstanding Voltage:250V AC/Minute
Insulation Resistance:100 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-0)
RoHS Compliant

FH XX H - H
(1) (2) (3) (4)

- (1) FH:1.25mm FH Series
(2) XX:No. Of Position
(3) H:Female Housing
(4) H:RoHS Compliant

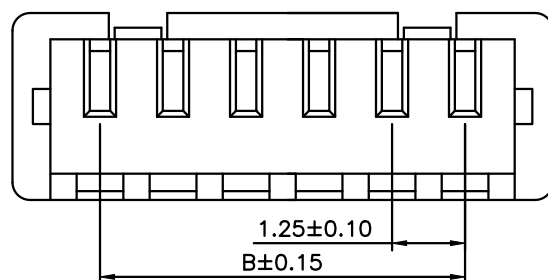

Pin	A	B
02	4.25	1.25
03	5.50	2.50
04	6.75	3.75
05	8.00	5.00
06	9.25	6.25
07	10.50	7.50
08	11.75	8.75
09	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50