


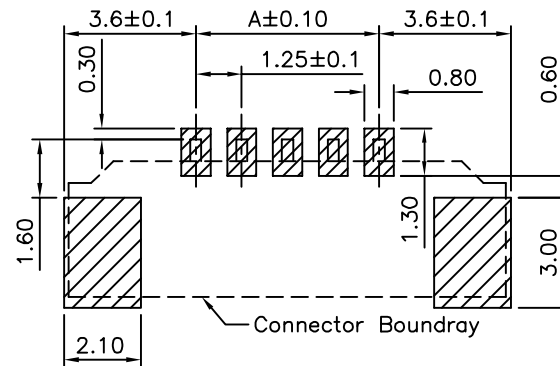
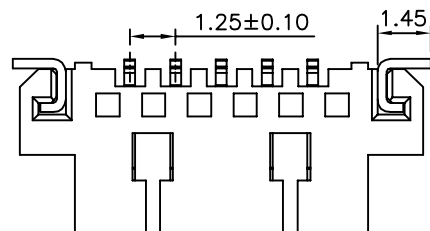
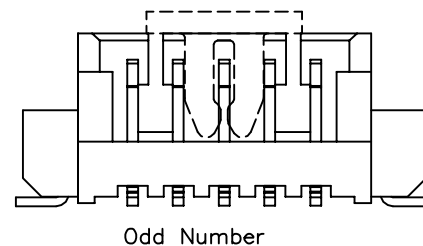

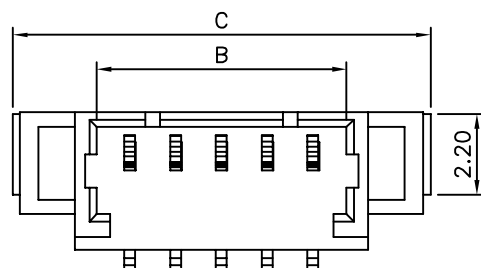


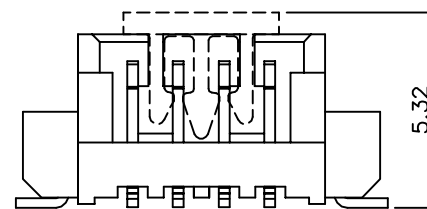

Recommended P.C.B. Layout



Odd Number

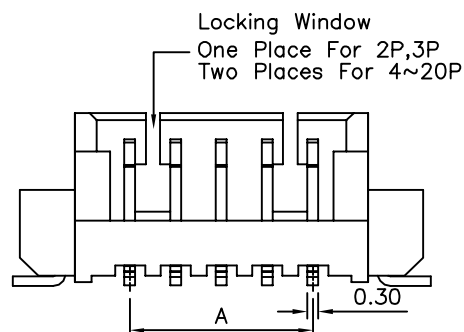

Dual Numbers

## SPECIFICATION

Current Rating: 1 Amp Max.  
 Operation Voltage: 150V AC Max.  
 Withstand Voltage: 500V AC RMS  
 Contact Resistance: 20 Milliohms Max.  
 Insulation Resistance: 500 Megaohms Min.  
 Operation Temperature:  $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$   
 Insulator & Cap: PA9T(UL94V-0), Nature  
 Contact: Brass, Tin Plated Over Nickel  
 Locating: Brass, Tin Plated Over Nickel  
 RoHS Compliant

FH XX V C - R1K - H  
 (1) (2) (3) (4) (5) (6)

- (1) FH: 1.25 FH Series  
 (2) XX: No. Of Position  
 (3) V: SMT Straight  
 (4) C: With Cap  
 (5) R1K: Tape & Reel 1000 PCS/Reel  
 (6) H: RoHS Compliant

| Pin | A     | B     | C     |
|-----|-------|-------|-------|
| 2   | 1.25  | 3.05  | 7.65  |
| 3   | 2.50  | 4.30  | 8.90  |
| 4   | 3.75  | 5.55  | 10.15 |
| 5   | 5.00  | 6.80  | 11.40 |
| 6   | 6.25  | 8.05  | 12.65 |
| 7   | 7.50  | 9.30  | 13.90 |
| 8   | 8.75  | 10.55 | 15.15 |
| 9   | 10.00 | 11.80 | 16.40 |
| 10  | 11.25 | 13.05 | 17.65 |
| 11  | 12.50 | 14.30 | 18.90 |
| 12  | 13.75 | 15.55 | 20.15 |
| 13  | 15.00 | 16.80 | 21.40 |
| 14  | 16.25 | 18.05 | 22.65 |
| 15  | 17.50 | 19.30 | 23.90 |
| 16  | 18.75 | 20.55 | 25.15 |
| 17  | 20.00 | 21.80 | 26.40 |
| 18  | 21.25 | 23.05 | 27.65 |
| 19  | 22.50 | 24.30 | 28.90 |
| 20  | 23.75 | 25.55 | 30.15 |

A MEMBER OF AUK GROUP

太聯事業股份有限公司  
 AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE  
 SPECIFIED  
 TOLERANCES ARE  
 .X  $\pm 0.30$   
 .XX  $\pm 0.20$   
 ANG.

PART No.  
 FHXXVC-R1K-H

CHECKED BY

HZF

DRAWING No.  
 FHXXVC-R1K-H

DRAWING BY


CYP

SCALE

NONE

REV.

A2

UNIT  
mm

| NO. | REV. | REVISIONS   | CHK | DATE       |
|-----|------|-------------|-----|------------|
| A2  |      | Modify Data | HZF | 08/31/2015 |
| A1  |      | Modify Data | HZF | 02/20/2013 |
| A0  |      | NEW RELEASE | HZF | 05/07/2012 |