
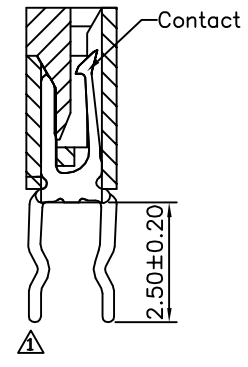
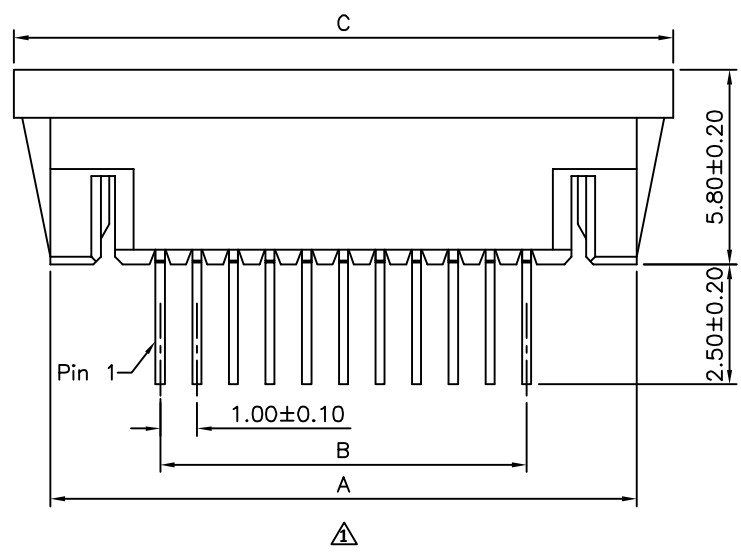
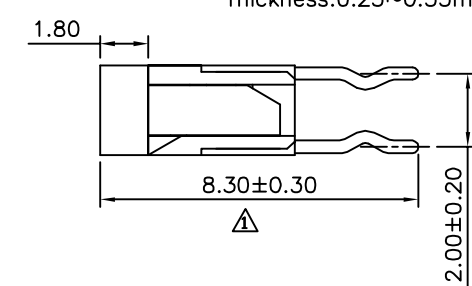


Applicable FPC/FFC  
Thickness: 0.25~0.35mm

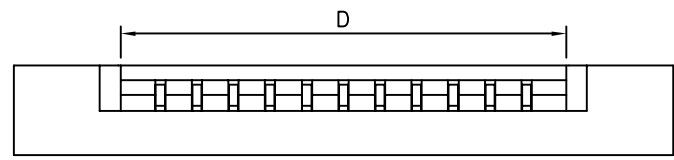

- FPA XX D ZA L - H H  
(1) (2) (3) (4) (5) (6) (7)
- (1) FPA: 1.0 mm FPC/FFC
  - (2) XX: No. Of Position
  - (3) D: DIP Straight
  - (4) ZA: ZIF Single Contact
  - (5) L: Standard Layout
  - (6) H: Withstand High Temperature
  - (7) H: RoHS Compliant

**SPECIFICATION**

1. General Characteristics  
1.0mm FPC XFP DIP 180° ZIF Single Contact  
Standard Layout Withstand High Temperature
2. Material & Finish  
Base: PA9T(UL94V-0), Ivory  
Slider: PPS(UL94V-0), Black  
Contact: Phosphor Bronze, Tin Plated Over Nickel
3. Electrical Characteristics  
Operating Voltage: 100V AC Max.  
Current Rating: 0.5 Amp Max.  
Dielectric Withstanding Voltage: 500V AC RMS  
Contact Resistance: 30 Milliohms Max.  
Insulation Resistance: 500 Megaohms Min.
4. Environmental Characteristics  
Operation Temperature: -40°C ~ +85°C
5. RoHS Compliant

Pin	A±0.20	B±0.15	C±0.20	D±0.08	E±0.15
4	9.00	3.00	11.00	5.15	3.00
5	10.00	4.00	12.00	6.15	4.00
6	11.00	5.00	13.00	7.15	5.00
7	12.00	6.00	14.00	8.15	6.00
8	13.00	7.00	15.00	9.15	7.00
9	14.00	8.00	16.00	10.15	8.00
10	15.00	9.00	17.00	11.15	9.00
11	16.00	10.00	18.00	12.15	10.00
12	17.00	11.00	19.00	13.15	11.00
13	18.00	12.00	20.00	14.15	12.00
14	19.00	13.00	21.00	15.15	13.00
15	20.00	14.00	22.00	16.15	14.00
16	21.00	15.00	23.00	17.15	15.00
17	22.00	16.00	24.00	18.15	16.00
18	23.00	17.00	25.00	19.15	17.00
19	24.00	18.00	26.00	20.15	18.00
20	25.00	19.00	27.00	21.15	19.00
21	26.00	20.00	28.00	22.15	20.00
22	27.00	21.00	29.00	23.15	21.00
23	28.00	22.00	30.00	24.15	22.00
24	29.00	23.00	31.00	25.15	23.00
25	30.00	24.00	32.00	26.15	24.00
26	31.00	25.00	33.00	27.15	25.00
27	32.00	26.00	34.00	28.15	26.00
28	33.00	27.00	35.00	29.15	27.00
29	34.00	28.00	36.00	30.15	28.00
30	35.00	29.00	37.00	31.15	29.00
31	36.00	30.00	38.00	32.15	30.00
32	37.00	31.00	39.00	33.15	31.00
33	38.00	32.00	40.00	34.15	32.00
34	39.00	33.00	41.00	35.15	33.00

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±4.0° .X ±0.20 .X.* ±3.0° .XX ±0.10 .XX.* ±2.0° .XXX ±0.05 .XXX.* ±1.0°		
PART No. FPAXXDZAL-HH		EMILY				
DRAWING No. FPAXXDZAL-HH		CHECKED BY HZF				
SCALE NONE		DRAWING BY SAN				
REV.	B1	UNIT mm	NO. REV.	REVISIONS	CHK	DATE

NO. REV.	B1	Modify Data	HZF	03/26/2014
NO. REV.	B0	NEW RELEASE	HZF	04/02/2012