
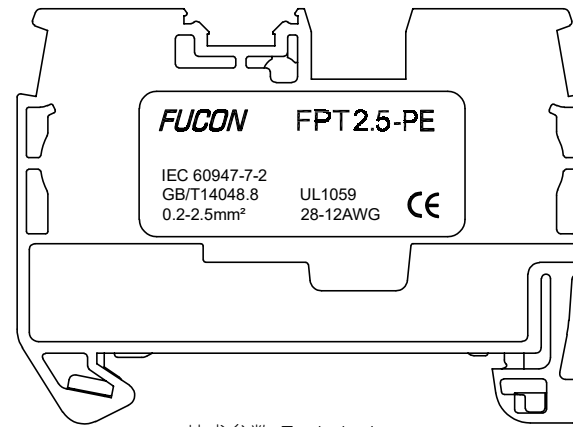



1		2		3		4		5		6		7		8	
未注公差/General tolerances(mm)															
>0 ~	>3 ~	>6 ~	>10 ~	>18 ~	>30 ~	>50 ~	>80 ~	>120 ~	>180 ~	>250 ~	>315 ~	>400 ~	>500 ~	0.1/10	
±0.15	±0.20	±0.25	±0.30	±0.35	±0.40	±0.60	±0.80	±0.90	±1.00	±1.20	±1.60	±2.20	±2.50	±2℃	

5	6	7	8
符号/SIGN	描述/DESCRIPTION	修订者/DRAWN	日期/DATE

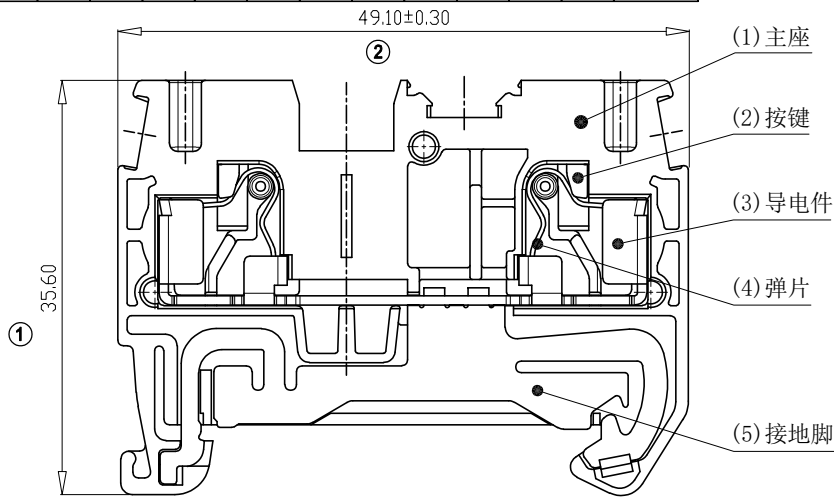

技术参数 Technical parameter:

● 产品标准/ Rated Voltage	UL1059	IEC60947-7-2
● 获得安规及标志 Access to Safety Mark		
● 证书号码/ Certificate No	XXXXXX	XXXXXX
● 额定电压/ Rated Voltage		
● 额定电流/ Rated Current	20A	32A
● 线径范围/ Wire range		0.2~2.5mm
● 硬质导线/ Solid wire(AWG)	28-12	
● 软质导线/ Stranded wire(AWG)	28-12	
● 剥线长度/ Wire strip length	12mm	12mm
● 绝缘耐压/ Withstanding Voltage		
● 温度范围/ Operating temperature	-40°C~105°C	
● 焊接温度/ Soldering temperature	260℃±5℃/5Sec	
● 关键尺寸/ Critical dimension	★	

⑤	接地脚	H65		1
④	按钮	PA66	UL94 V-0	2
③	弹片	SUS301		2
②	导电件	T2		1
①	主座	PA66	UL94 V-0	1
ITEM 序号	NAME OF PART 部件名称	Material 材料	NOTES 备注	QTY 用量

	CAT NO./认证型号	FPT2.5-PE	SHEET: 1/1
	PATE NO./成品料号	XX.XX.XXX.XXXX	SCALE: 1:1
	CUST NO./客户料号	/	REV.: A01
APPROVED/审批	凌家民 2023.04.12	MODEL:	
CHECKED/核准	林平财 2023.04.12	FPT2.5-PE	接地绿色
DRAWN/制图	林平财 2023.04.12	DRAWING NO./图号:	FPT2.5-PE
⊕	SIZE: A4	TYPE/图纸类型:	CUSTOMER_DRAWING