


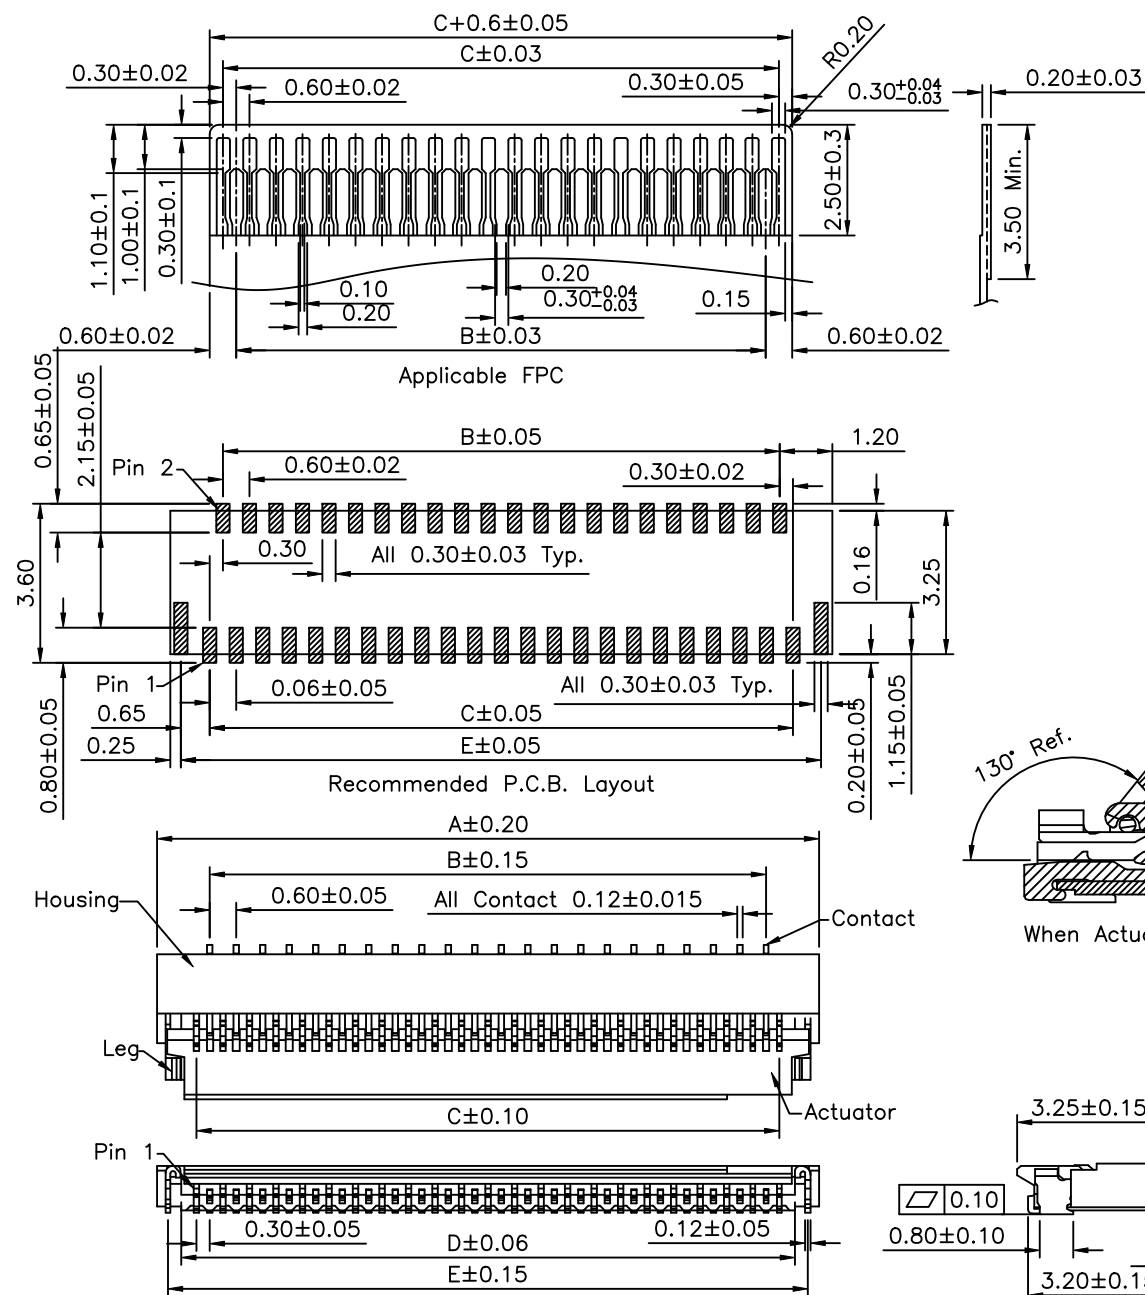

SPECIFICATION

1.General Characteristics

0.3mm FPC XXP SMT 90° Easy On Type Bottom

Contact H=1.0mm Gold Flash Tape & Reel 5000 PCS/Reel

2.Material&Finish

Housing:LCP(UL94V-0),Black

Actuator:LCP(UL94V-0),Black

Contact:Phosphor Bronze,Gold Flash Over All,Over Nickel

Leg:Phosphor Bronze,Tin Plated Over Nickel

3.Electrical Characteristics

Voltage Rating:30V AC/DC

Current Rating:0.2A AC/DC

4.Environmental Characteristics

Temperature Rating:-55°C~+85°C

5.RoHS Compliant

FPT XX WHB 10 G - R5K - H
(1) (2) (3) (4) (5) (6) (7)

(1) FPT:0.3mm FPC/FFC

(2) XX:No. Of Position

(3) WHB:SMT Right Angle Easy On Type Bottom Contact


(4) 10:H=1.0mm

(5) G:Gold Flash Over All,Over Nickel


(6) R5K:Tape & Reel 5000 PCS/Reel

(7) H:RoHS Compliant

Pin	A	B	C	D	E
13	5.40	3.00	3.60	4.25	4.90
15	6.00	3.60	4.20	4.85	5.50
17	6.60	4.20	4.80	5.45	6.10
19	7.20	4.80	5.40	6.05	6.70
21	7.80	5.40	6.00	6.65	7.30
23	8.40	6.00	6.60	7.25	7.90
25	9.00	6.60	7.20	7.85	8.50
27	9.60	7.20	7.80	8.45	9.10
29	10.20	7.80	8.40	9.05	9.70
31	10.80	8.40	9.00	9.65	10.30
33	11.40	9.00	9.60	10.25	10.90
35	12.00	9.60	10.20	10.85	11.50
37	12.60	10.20	10.80	11.45	12.10
39	13.20	10.80	11.40	12.05	12.70
41	13.80	11.40	12.00	12.65	13.30
45	15.00	12.60	13.20	13.85	14.50
49	16.20	13.80	14.40	15.05	15.70
51	16.80	14.40	15.00	15.65	16.30
57	18.60	16.20	16.80	17.45	18.10
61	19.80	17.40	18.00	18.65	19.30
67	21.60	19.20	19.80	20.45	21.10
71	22.80	20.40	21.00	21.65	22.30
73	23.40	21.00	21.60	22.25	22.90

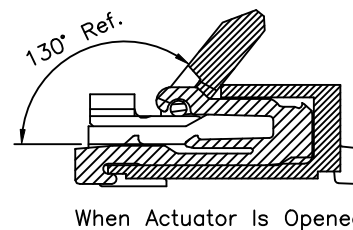

When Actuator Is Opened

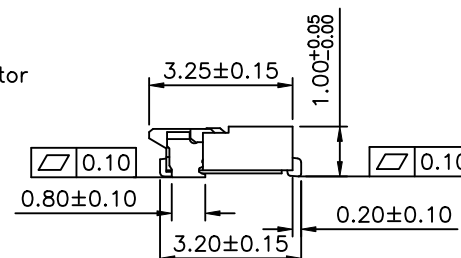

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED
TOLERANCES AREPART No.
FPTXXWHB10G-R5K-H

CHECKED BY

HZF

DRAWING No.
FPTXXWHB10G-R5K-H

DRAWING BY

CYP

SCALE

NONE

REV.

B0

UNIT
mm

NO. REV.

Modify P/N: FPTXXWHB10G-R5K-H
--> FPTXXWHB10G-R5K-H

HZF

06/05/2017

B0

NEW RELEASE

HZF

06/05/2017

REVISIONS

CHK

DATE