

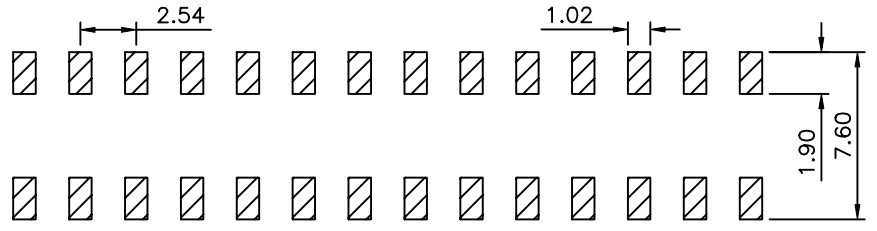



△ SPECIFICATION
 Rated Current:3.0 Amp
 Withstand Voltage:1000V AC/DC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T+30%G.F. UL94V-0,Black
 Contact:Phosphor Bronze,Gold Plated Over Nickel
 RoHS Compliant

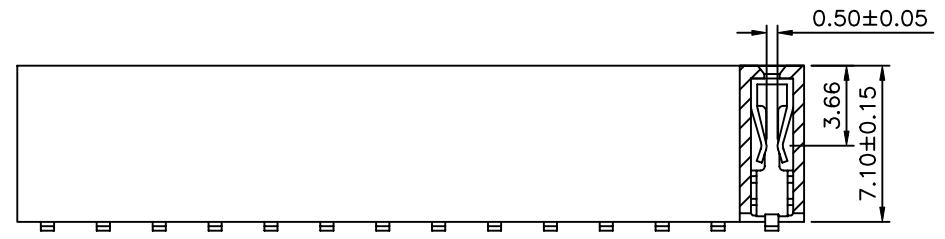

△ Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance±0.05)

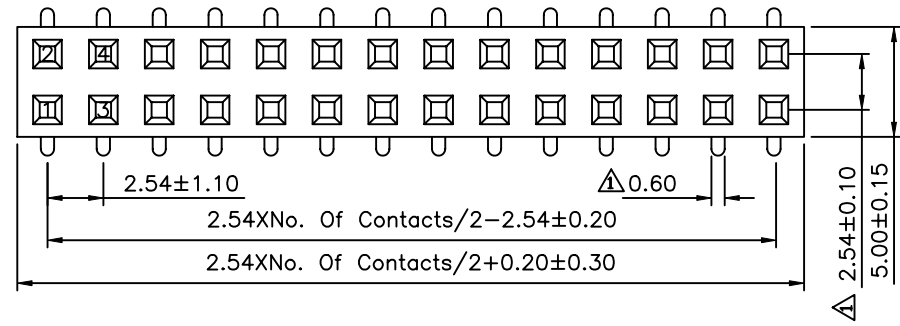

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No. FVX75-2XXX-H		MEI	
DRAWING No. FVX75-2XXX-H		CHECKED BY HZF	
SCALE		DRAWING BY QQJ	
NONE	REV.	A1	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 △ .X ±0.40
 .XX ±0.25
 .XXX ±0.15
 ANG. ±3°
 UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	01/16/2010
△ A0		NEW RELEASE	BECKY	04/11/2005