



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1. Mechanical Dimensions

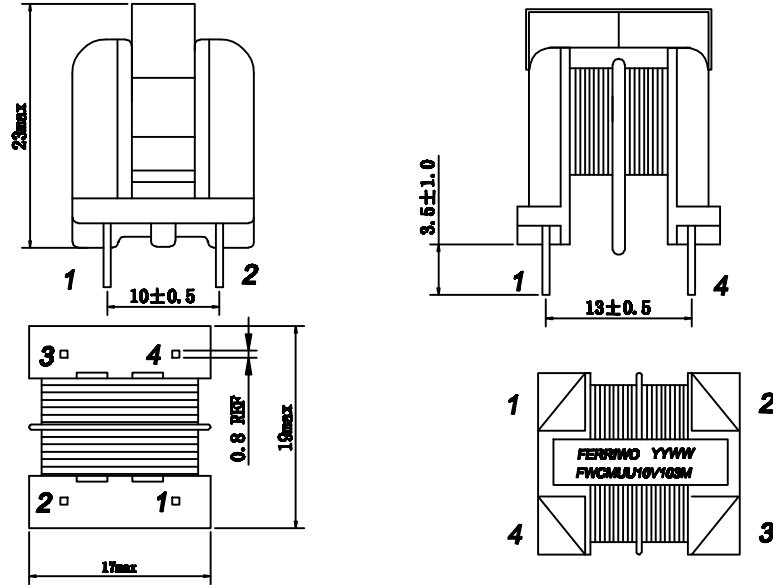

2. Schematic Diagram

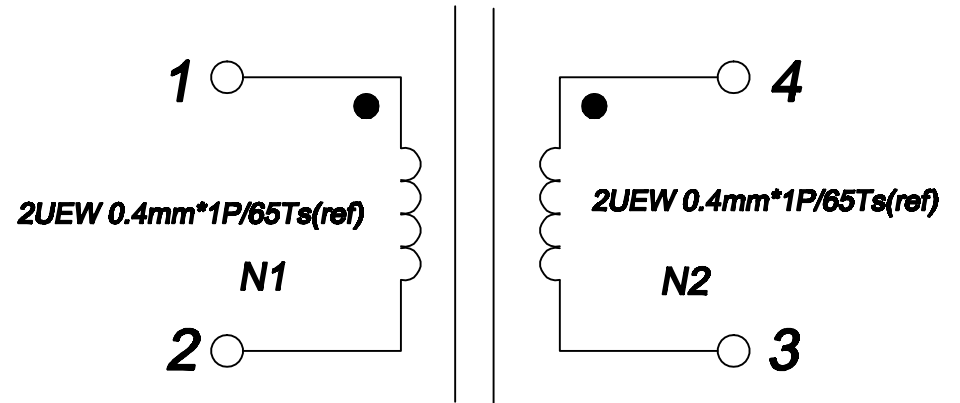

3. Material List

Bobbin: UU10.5 2+2PIN
Core: UU10.5 FWS10K
Wire: 2UEW 0.40mm 155°C
Operating temperature range: -40°C to +105°C

4. Electrical Specification

Inductance: $L(1-2) = L(3-4) = 10\text{mH min } 1.0\text{KHZ } 0.3\text{V}$
Hi-pot: Coil-Coil: 1000V AC/1mA/2 Second

REV.	DATE	 Convention Placement	DRW.	 2019.08.10 夏海斌	Drawing Title: INDUCTOR	Part No: FWCMUU10V103M
0	00/00		CHK.			
RoHS		www.ferriwo.com	APP.	 2019.08.10 李舒	Customer P/N: PLA10AN1030R7R2B	Specification Sheet 1 of 1