



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

FERRIWO

1. Mechanical Dimensions

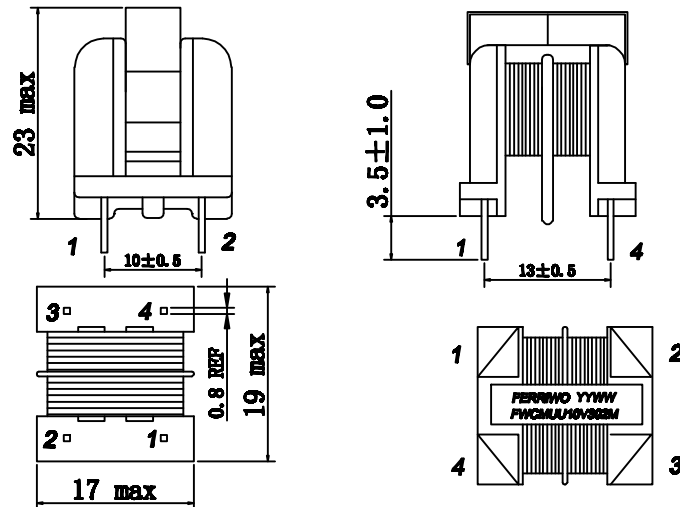

2. Schematic Diagram

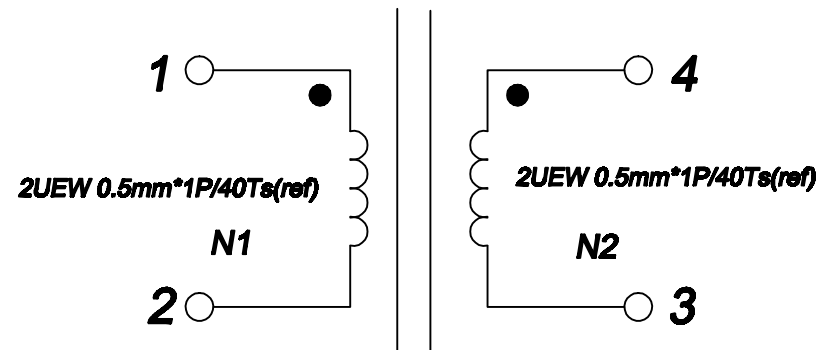

3. Material List

Bobbin: UU10.5 2+2PIN
 Core: UU10.5 FWS15K
 Wire: 2UEW 0.50mm 155°C
 Operating temperature range: -40°C to +105°C

4. Electrical Specification

Inductance: $L(1-2) = L(3-4) = 3.0\text{mH min } 1.0\text{KHZ } 0.3\text{V}$
 Hi-pot: Coil-Coil: 1000V AC/1mA/2 Second
 Rated Current : 1.3A Rated Voltage : 300V

REV.	DATE	 Convention Placement	DRW.		Drawing Title: INDUCTOR	Part No:
00	20.07.11		CHK.			
RoHS		www.ferriwo.com	APP.		Customer P/N:	