



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1. Mechanical Dimensions

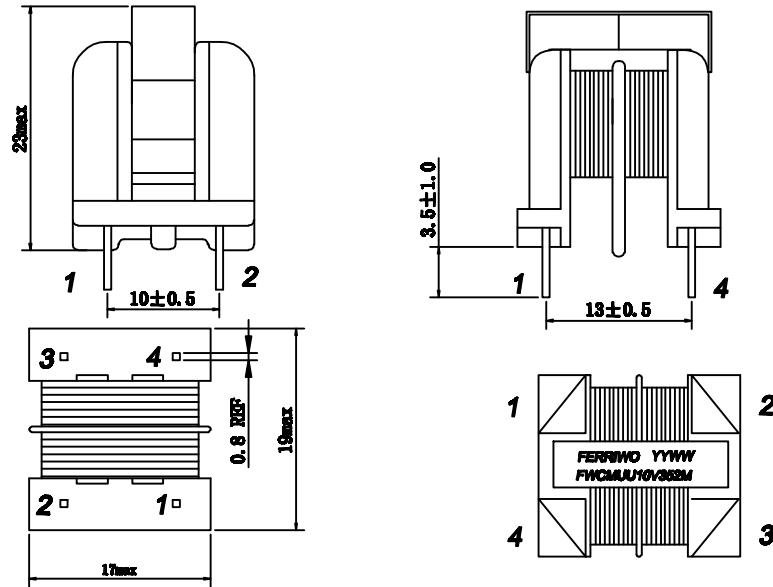

2. Schematic Diagram

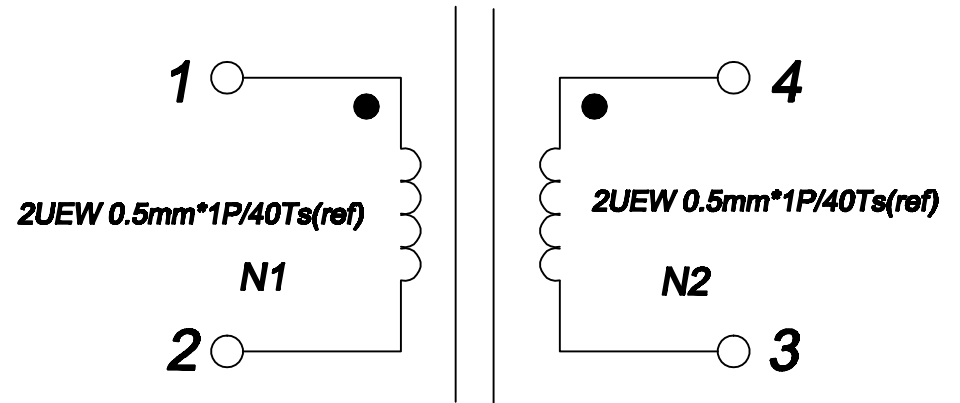

3. Material List

Bobbin:UU10.5 2+2PIN
 Core:UU10.5 FWS10K
 Wire:2UEW 0.50mm 155°C
 Operating temperature range:-40°C to +105°C

4. Electrical Specification

Inductance: $L(1-2) = L(3-4) = 3.5\text{mH min } 1.0\text{KHZ } 0.3\text{V}$
 Hi-pot: Coil-Coil:1000V AC/1mA/2 Second

REV.	DATE	 Convention Placement	DRW.	 2019.08.10 夏新	Drawing Title: INDUCTOR	Part No: FWCMUU10V352M
0	00/00		CHK.			
RoHS		www.ferriwo.com	APP.	 2019.08.10 夏新	Specification Sheet 1 of 1	