



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	Yes	Yes



1. Mechanical Dimensions: (mm)

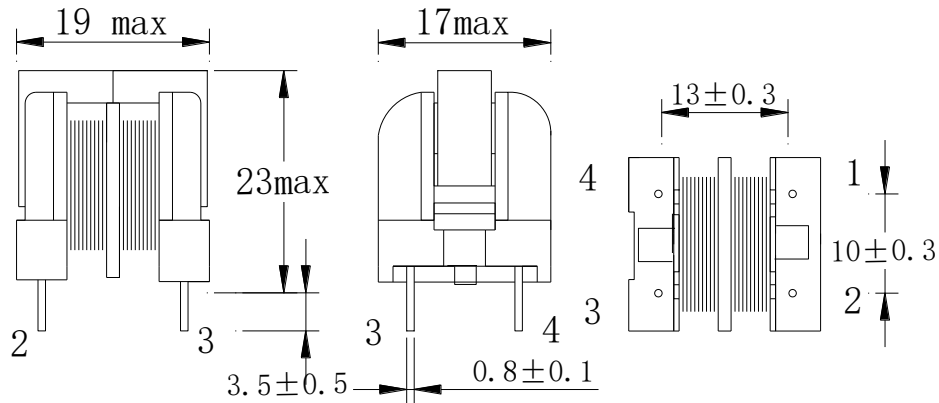

2. Schematic Diagram

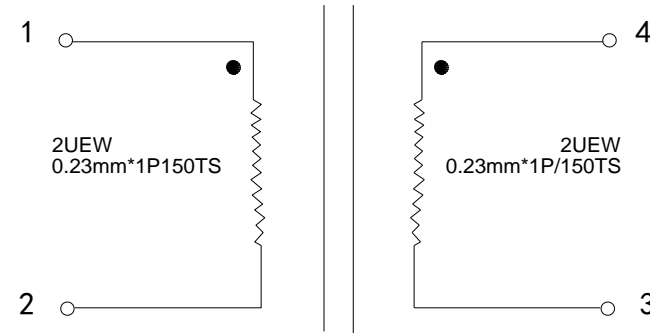

3. Material List

Core: UU10.5 (10K)
 Bobbin: UU10.5 2+2PIN
 Wire: 2UEW-F-Ø0.23mm

4. Electrical Specification

Inductance: $L(1-2=4-3): 37mH \text{ min (1KHZ } 0.3V)$
 DC Resistance: $R(1-2=3-4) = 6\Omega \text{ Max (at } 25^\circ C)$
 Dielectric Strength: Between P-S No Break-down Applied AC 1000V/50Hz/1mA/ 3S

REV.	DATE	 Convention placement	DRW.	LI SONG LIN	DRAWING TITLE EMI FILTER Customer P/N: FWCMUU10V373N	Part No:
0	04/17		CHK.	HE PING JUN		FWCMUU10V373N
			APP.	WANG YUAN ZHI		SPECIFICATION SHEET 1 OF 1
RoHS		www.ferriwo.com				