



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



### 1. Mechanical Dimensions

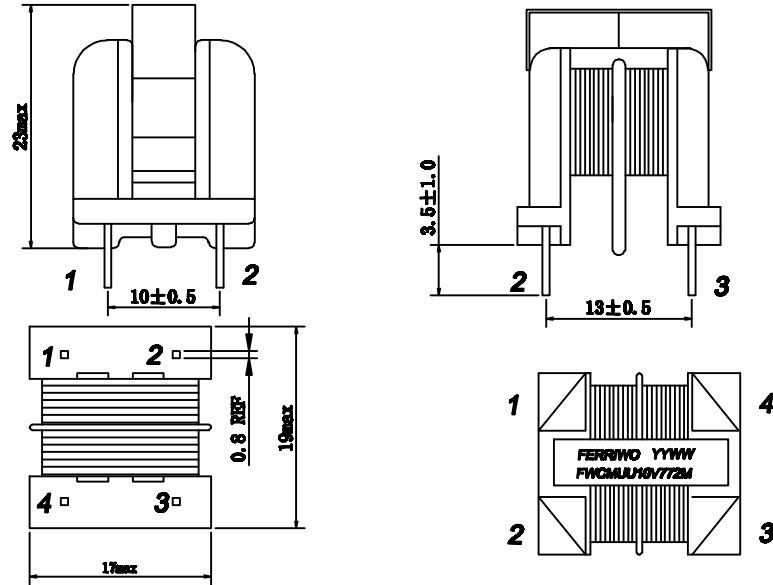

### 2. Schematic Diagram

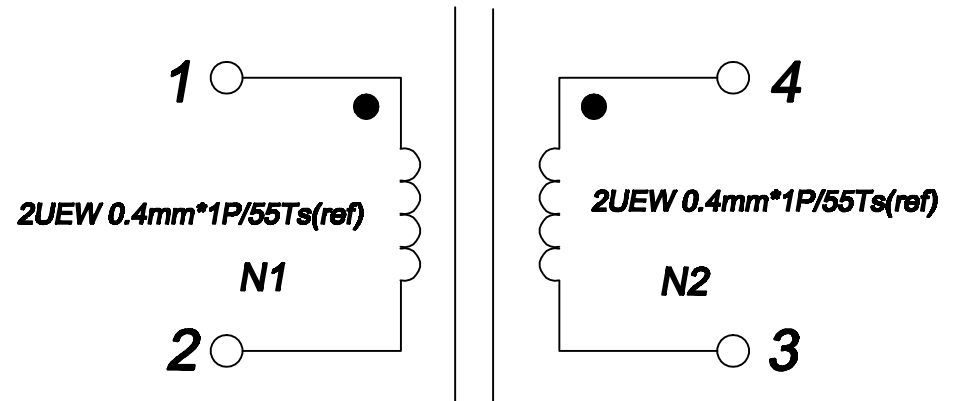

### 3. Material List

- Bobbin: UU10.5 2+2PIN
- Core: UU10.5 FWS15K
- Wire: 2UEW 0.40mm 155°C
- Operating temperature range: -40°C to +105°C

### 4. Electrical Specification

- Inductance:  $L(1-2) = L(3-4) = 7.7\text{mH min } 1.0\text{KHZ } 0.3\text{V}$
- Hi-pot: Coil-Coil: 1000V AC/1mA/2 Second

REV.	DATE	 Convention Placement	DRW.	 2019.09.09 夏海斌	Drawing Title: <b>INDUCTOR</b>	Part No: <b>FWCMUU10V772M</b>
0	00/00		CHK.			
<b>RoHS</b>		<a href="http://www.ferriwo.com">www.ferriwo.com</a>	APP.	 2019.09.09 朱衍	Customer P/N: UU10.5	Specification Sheet 1 of 1