



CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	Yes	Yes



1. Mechanical Dimensions: (mm)

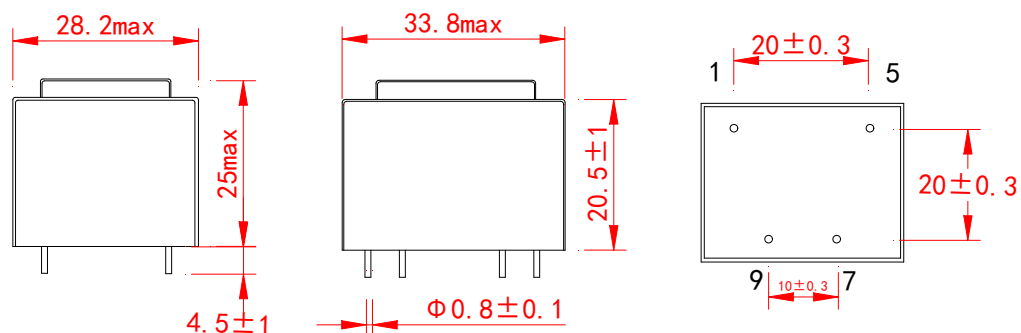

2. Schematic Diagram

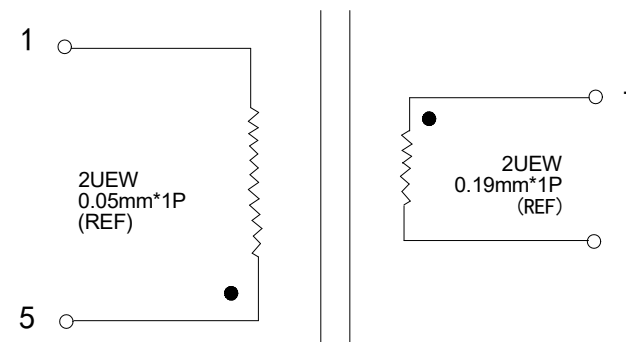

PIN2、3、4、6、8、10 CUT OFF. Marking Write on the component case: FWE130423B

PRI: 230V 50/60Hz 1-5

SEC: 9V 1.9VA 7-9

Ta 70/B

3. Material List

Core: EI30- (0.5mm/t) -(huahuang Co.,Ltd)

Bobbin: EI30-12.5- 10PIN -(huahuang Co.,Ltd)

Wire: 2UEW-F-Ø0.05mm, Ø0.19mm. -(Langli Co.,Ltd)

Epoxy resin: A and B(910D)- (Jiaxing jiangang Co.,Ltd)

4. Electrical Specification

INPUT: (1-5):230VAC,50/60Hz.

OUTPUT: (7-9):9.0V±0.5V(0.211A).

Dielectric Strength: Between P-S No Break-down Applied AC 2000V 2S

Between P,S-C No Break-down Applied AC 500V 2S

REV.	DATE	<p>Convention placement</p>	DRW.	LI SONG LIN	DRAWING TITLE TRANSFORMER Customer P/N: EI30-12.5-1.9VA(9V)	Part No:
0	02/23		CHK.	HE PING JUN		FWE130423B
			APP.	WANG YUAN ZHI		SPECIFICATION SHEET 1 OF 1
RoHS		www.ferriwo.com				

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION