


CUSTOMER TERMINAL	ROHS	Lead(Pb)-free
	Yes	Yes




1. Mechanical Dimensions: (mm)

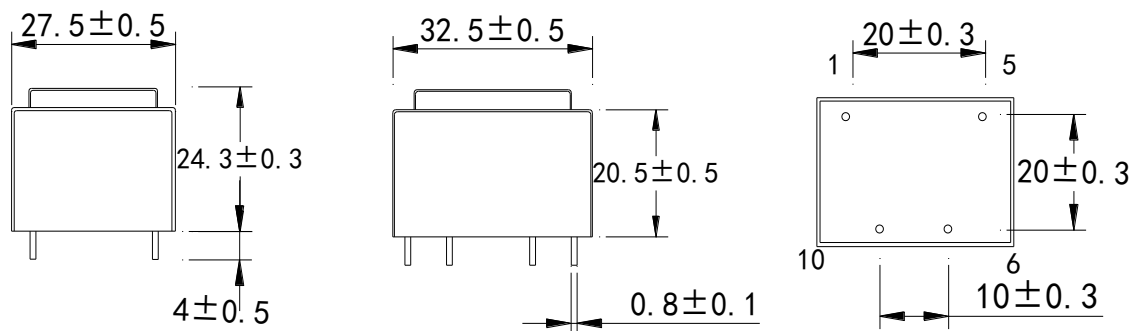

EI30-12.5-1.8VA
 PRI : 230V 50/60Hz 1-5
 SEC : 6.5V 0.277A 7-9
 Ta 70/B

PIN2, 3, 4, 6, 8, 10 CUT OFF.

2. Schematic Diagram

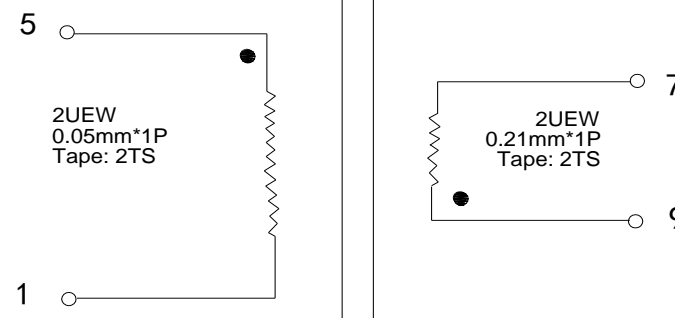

3. Material List

- Core: EI30- (0.5mm/t)
- Bobbin: EI30-12.5-NL 5+5PIN
- Wire: 2UEW-F-Ø0.05mm, Ø0.21mm.
- Epoxy resin: A and B(910D)
- MALAYER TAPE : W=7.5mm (JY25-A)

4. Electrical Specification

- INPUT: (1-5):230VAC,50/60Hz.
- OUTPUT: (7-9): 6.5V±8% (1.8VA).
- Insulation Resistance: Between P to S 100MΩ min applied 500V DC
- Dielectric Strength: Between P-S No Break-down Applied AC 4000V 5S
- Between P,S-C No Break-down Applied AC 800V 5S

REV.	DATE	 Convention placement	DRW.	LI SONG LIN	DRAWING TITLE	Part No:
0	11/15		CHK.	HE PING JUN		
RoHS		www.ferriwo.com	APP.	WANG YUAN ZHI	SPECIFICATION SHEET	1 OF 1