



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES



1. Mechanical Dimensions

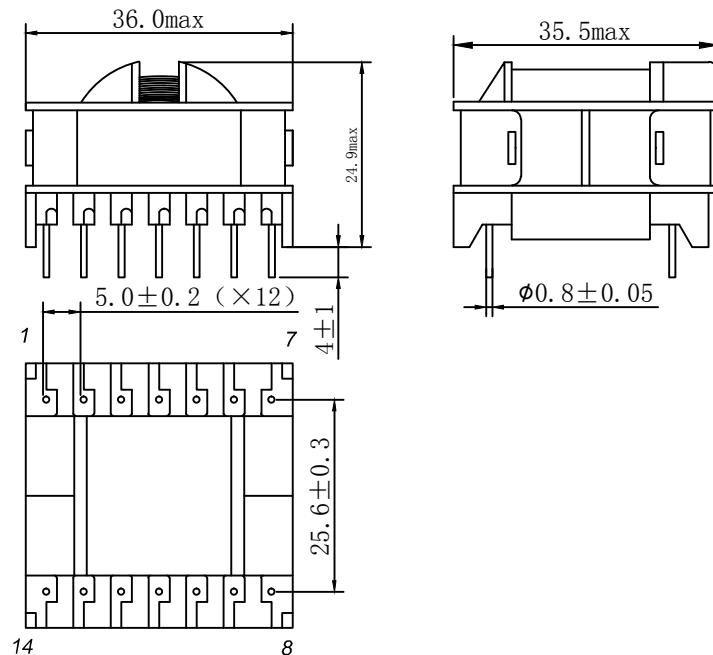

2. Schematic Diagram

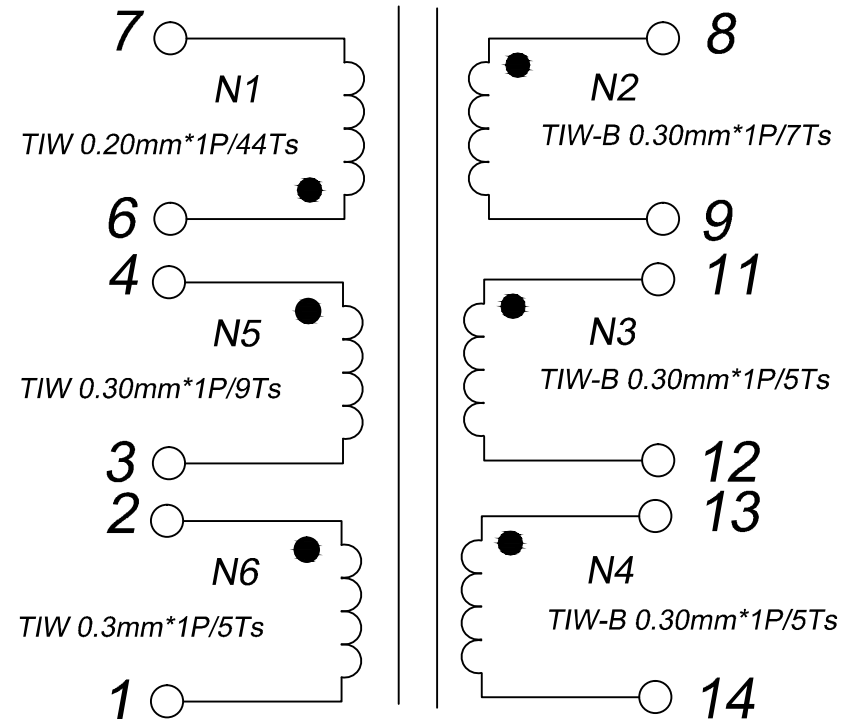

3. Material List

Core:ETD29
 Bobbin:ETD29 7+7PIN
 Wire:TIW-B-0.20mm/0.3 mm
 Operating Temperature: -40 to 70°C

4. Electrical Specification

Inductance: $L(6-7) = 1.6mH \pm 5\%$ 1.0KHZ 1.0V
 Leakage Inductance: $LK(6-7) = 7uH_{max}$ 100.0KHZ 1.0V
 HI-POT: P-S AC4000V 2mA 60S
 HI-POT:P,S-CORE AC1500V 2mA 60S

REV.	DATE	 Convention Placement	DRW.	Xia xiaokai	Drawing Title: TRANSFORMER	Part No:
0	04/14		CHK.	Pan yuca		FWPT-ETD29H-162J
RoHS		www.ferriwo.com	APP.	Zhu kan	Customer P/N:	Specification Sheet 1 of 1