



CUSTOMER TERMINAL	ROHS	Lead (Pb) -free
	YES	YES

FERRIWO

1. Mechanical Dimensions

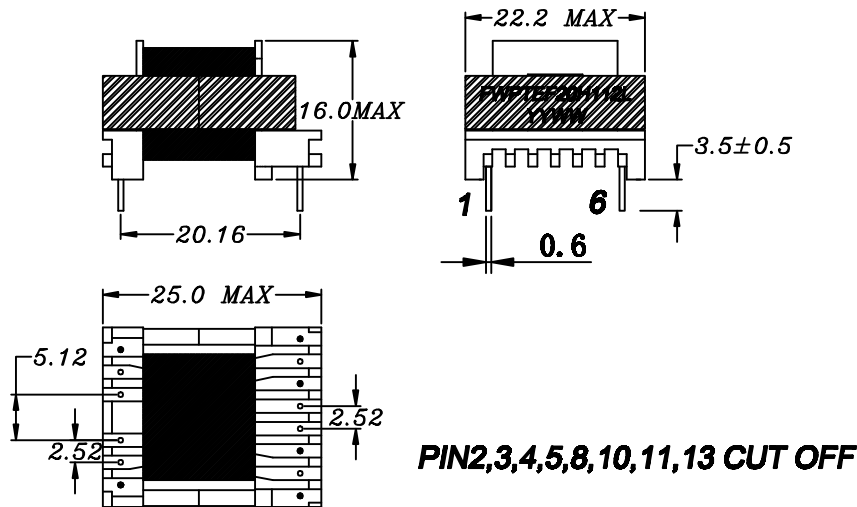

2. Schematic Diagram

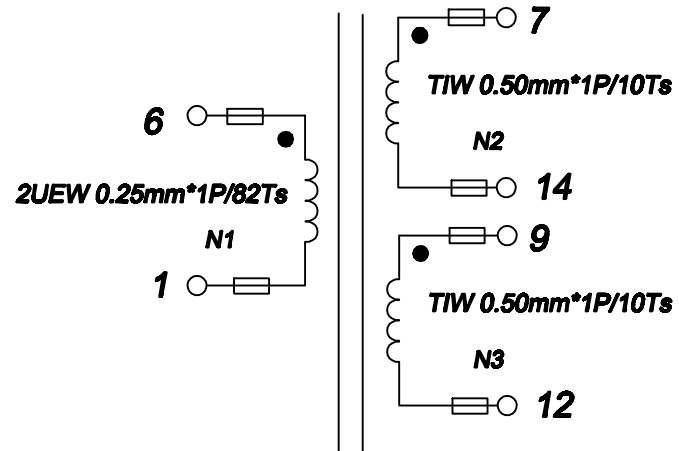

3. Material List

Core:FW44-EE20/10/6
 Bobbin:FWB2027 (6+8PIN)
 Wire:2UEW-B-0.25mm 130°C TIW-B-0.50mm 130°C
 Tube:TFL TUBE
 Operating Temperature: -30 to 115°C

4. Electrical Specification

Inductance: L (6-1) = 1.15mH±15% 1KHZ 1V
 LK: L(6-1) = 45uH MAX 100KHz 1V short other pins
 DCR: (6-1)=1.3Ω MAX
 HI-POT: P-S AC 4000V 5mA 60seconds
 P、S-CORE AC 1500V 5mA 60seconds
 Rated voltage:85~265V(50~60Hz)
 Rated current:0.5A
 Rated power:70VA

REV.	DATE	 Convention Placement	DRW.	夏晓凯 2019.12.21	Drawing Title: TRANSFORMER Customer P/N: V-50213	Part No:	FWPTEF20H112L
0	10/19		CHK.	潘玉财 2019.12.21		Specification Sheet 1 of 1	
1	12/21		APP.	王永生 2019.12.21			
RoHS		www.ferriwo.com					