



*AU Optronics Authorized Distributor*

# **Specification G150XNT05.0**

**Version: October 2012**

( ) Preliminary Specifications  
(V) Final Specifications

|                   |                       |
|-------------------|-----------------------|
| <b>Module</b>     | 15 Inch Color TFT-LCD |
| <b>Model Name</b> | G150XTN05.0           |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div style="display: flex; justify-content: space-between; margin-bottom: 20px;"> <div><b>Customer</b></div> <div><b>Date</b></div> </div> <div style="height: 150px; border: 1px solid black; margin-bottom: 20px;"></div> <div style="display: flex; justify-content: space-between;"> <div><b>Checked &amp; Approved by</b></div> <div></div> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div>_____</div> <div>_____</div> </div> | <div style="display: flex; justify-content: space-between; margin-bottom: 20px;"> <div><b>Approved by</b></div> <div><b>Date</b></div> </div> <div style="display: flex; justify-content: space-between; margin-bottom: 20px;"> <div>_____ Vito Huang _____</div> <div>_____ 2012/10/22 _____</div> </div> <div style="display: flex; justify-content: space-between; margin-bottom: 20px;"> <div><b>Prepared by</b></div> <div></div> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <div>_____ Wennie Lee _____</div> <div>_____ 2012/10/22 _____</div> </div> |
| <p>Note: This Specification is subject to change without notice.</p>                                                                                                                                                                                                                                                                                                                                                                                                            | <p>General Display Business Division /<br/>AU Optronics corporation</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

AUO Confidential For DATAMODUL Internal Use Only / 2013/12/17

## Contents

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1. Operating Precautions</b>                           | <b>4</b>  |
| <b>2. General Description</b>                             | <b>5</b>  |
| 2.1 Display Characteristics                               | 5         |
| 2.2 Optical Characteristics                               | 6         |
| <b>3. Functional Block Diagram</b>                        | <b>9</b>  |
| <b>4. Absolute Maximum Ratings</b>                        | <b>10</b> |
| 4.1 Absolute Ratings of TFT LCD Module                    | 10        |
| 4.2 Absolute Ratings of Environment                       | 10        |
| <b>5. Electrical Characteristics</b>                      | <b>11</b> |
| 5.1 TFT LCD Module                                        | 11        |
| 5.2 Backlight Unit                                        | 13        |
| <b>6. Signal Characteristic</b>                           | <b>14</b> |
| 6.1 Pixel Format Image                                    | 14        |
| 6.2 Scanning Direction                                    | 14        |
| 6.3 Signal Description                                    | 15        |
| 6.4 The Input Data Format                                 | 16        |
| 6.5 Interface Timing                                      | 17        |
| 6.6 Power ON/OFF Sequence                                 | 18        |
| <b>7. Connector &amp; Pin Assignment</b>                  | <b>19</b> |
| 7.1 TFT LCD Module: LVDS Connector                        | 19        |
| 7.2 Backlight Unit: LED Driver Connector                  | 21        |
| 7.3 LED Connector Pin Assignment                          | 21        |
| <b>9. Mechanical Characteristics</b>                      | <b>23</b> |
| 9.1 LCM Outline Dimension (Front View and back view)      | 23        |
| <b>10. Label and Packaging</b>                            | <b>24</b> |
| 10.1 Shipping Label (on the rear side of TFT-LCD display) | 24        |
| 10.2 Carton Package                                       | 24        |
| <b>11 Safety</b>                                          | <b>25</b> |
| 11.1 Sharp Edge Requirements                              | 25        |
| 11.2 Materials                                            | 25        |
| 11.3 Capacitors                                           | 25        |
| 11.4 National Test Lab Requirement                        | 25        |

## Record of Revision

| Version and Date | Page | Old description                      | New Description                       |
|------------------|------|--------------------------------------|---------------------------------------|
| 0.0 2012/6/1     | All  | First Edition                        |                                       |
| 0.1 2012/6/12    | 13   | PLED: 7.2(typ)                       | PLED:6.48(min), 7.2(typ), 7.92(max)   |
|                  |      | Vanalog: 2.0(min), 5(typ), 5.5(max)  | NA                                    |
|                  | 15   | Singal description: typo             |                                       |
| 0.2 2012/8/10    | 5    | Support Color: 16.2M colors          | 16.2M / 262K colors                   |
|                  | 14   | NA                                   | Fig. 2 Reverse scan                   |
|                  | 15   | Pin 4: NC                            | Pin 4: REV                            |
|                  |      | Pin 20:Nc                            | Pin20: SEL68                          |
|                  | 16   | 6.4.1 LVDS Input                     | 6.4.1 SEL68                           |
|                  | 19   | Pin 4: NC                            | Pin 4: REV                            |
|                  |      | Pin 20:NC                            | Pin20: SEL68                          |
| 1.0 2012/10/22   | 5    | Typical Power Consumption: 9.1 typ   | Typical Power Consumption: 7.66 typ.  |
|                  | 6    | View angle: Lower: 50(min), 60(typ)  | View angle: Lower: 60(min), 70(typ)   |
|                  | 11   | Note1                                | NA                                    |
|                  | 13   | Ivcc: 0.6                            | Ivcc: 0.48                            |
|                  |      | PLED: 6.48(min), 7.2(typ), 7.92(max) | PLED: 5.18(min), 5.76(typ), 6.05(max) |
|                  | 23   | NA                                   | Add note                              |

AUO Confidential For DATAMODUL Internal Use Only 2013/2/1

## 1. Operating Precautions

- 1) Since front polarizer is easily damaged, please be cautious and not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or soft cloth.
- 5) Since the panel is made of glass, it may be broken or cracked if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open nor modify the module assembly.
- 8) Do not press the reflector sheet at the back of the module to any direction.
- 9) In case if a module has to be put back into the packing container slot after it was taken out from the container, do not press the center of the LED Reflector edge. Instead, press at the far ends of the LED Reflector edge softly. Otherwise the TFT Module may be damaged.
- 10) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 11) TFT-LCD Module is not allowed to be twisted & bent even force is added on module in a very short time. Please design your display product well to avoid external force applying to module by end-user directly.
- 12) Small amount of materials without flammability grade are used in the TFT-LCD module. The TFT-LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 13) Severe temperature condition may result in different luminance, response time.
- 14) Continuous operating TFT-LCD Module under high temperature environment may accelerate LED light bar exhaustion and reduce luminance dramatically.
- 15) The data on this specification sheet is applicable when TFT-LCD module is placed in landscape position.
- 16) Continuous displaying fixed pattern may induce image sticking. It's recommended to use screen saver or moving content periodically if fixed pattern is displayed on the screen.

## 2. General Description

G150XTN05.0 is a Color Active Matrix Liquid Crystal Display composed of a TFT-LCD display, a driver circuit, and a backlight system. The screen format is intended to support XGA (1024(H) x 768(V)) screen and 16.2M (RGB 8-bits) or 262k colors (RGB 6-bits). All input signals are LVDS interface compatible. All design rules of this module can correspond to PSWG standard.

G150XTN05.0 is designed for industrial display applications.

### 2.1 Display Characteristics

The following items are characteristics summary on the table under 25 °C condition:

| Items                                                     | Unit         | Specifications                      |
|-----------------------------------------------------------|--------------|-------------------------------------|
| Screen Diagonal                                           | [inch]       | 15                                  |
| Active Area                                               | [mm]         | 304.128(H) x 228.096(V)             |
| Pixels H x V                                              |              | 1024x3(RGB) x 768                   |
| Pixel Pitch                                               | [mm]         | 0.297 x 0.297                       |
| Pixel Arrangement                                         |              | R.G.B. Vertical Stripe              |
| Display Mode                                              |              | TN, Normally White                  |
| Nominal Input Voltage VDD                                 | [Volt]       | 3.3 typ.                            |
| Typical Power Consumption                                 | [Watt]       | 7.66 typ.                           |
| Weight                                                    | [Grams]      | 1000g (max.)                        |
| Physical Size                                             | [mm]         | 326.5(H)x 253.5(V) x 12.0(D) (max.) |
| Electrical Interface                                      |              | 1 channel LVDS                      |
| Surface Treatment                                         |              | Anti-glare, Hardness 3H             |
| Support Color                                             |              | 16.2M / 262K colors                 |
| Temperature Range<br>Operating<br>Storage (Non-Operating) | [°C]<br>[°C] | -30 to +85<br>-30 to +85            |
| RoHS Compliance                                           |              | RoHS Compliance                     |

## 2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C (Room Temperature):

| Item                                        | Unit                 | Conditions                           | Min.  | Typ.  | Max.  | Note    |
|---------------------------------------------|----------------------|--------------------------------------|-------|-------|-------|---------|
| White Luminance                             | [cd/m <sup>2</sup> ] |                                      | 280   | 350   | -     | 1       |
| Uniformity                                  | %                    | 9 Points                             | 75    | 80    | -     | 1, 2, 3 |
| Contrast Ratio                              |                      |                                      | 400   | 700   | -     | 4       |
| Cross talk                                  | %                    |                                      | -     | 1.2   | 1.5   | 5       |
| Response Time                               | [msec]               | Rising                               | -     | 5.7   |       | 6       |
|                                             | [msec]               | Falling                              | -     | 2.3   |       |         |
|                                             | [msec]               | Raising + Falling                    | -     | 8     |       |         |
| Viewing Angle                               | [degree]             | Horizontal (Right)<br>CR = 10 (Left) | 70    | 80    | -     | 7       |
|                                             | [degree]             |                                      | 70    | 80    | -     |         |
|                                             | [degree]             | Vertical (Upper)<br>CR = 10 (Lower)  | 60    | 70    | -     |         |
|                                             | [degree]             |                                      | 60    | 70    | -     |         |
| Color / Chromaticity Coordinates (CIE 1931) |                      | Red x                                | 0.579 | 0.629 | 0.679 |         |
|                                             |                      | Red y                                | 0.299 | 0.349 | 0.399 |         |
|                                             |                      | Green x                              | 0.273 | 0.323 | 0.373 |         |
|                                             |                      | Green y                              | 0.562 | 0.612 | 0.662 |         |
|                                             |                      | Blue x                               | 0.104 | 0.154 | 0.204 |         |
|                                             |                      | Blue y                               | 0.033 | 0.083 | 0.133 |         |
|                                             |                      | White x                              | 0.263 | 0.313 | 0.363 |         |
|                                             |                      | White y                              | 0.279 | 0.329 | 0.379 |         |
| Color Gamut                                 | %                    |                                      | 60    | 65    | -     |         |


Note 1: Measurement method

Equipment Pattern Generator, Power Supply, Digital Voltmeter, Luminance meter (SR\_3 or equivalent)


Aperture 1° with 50cm viewing distance

Test Point Center

Environment < 1 lux

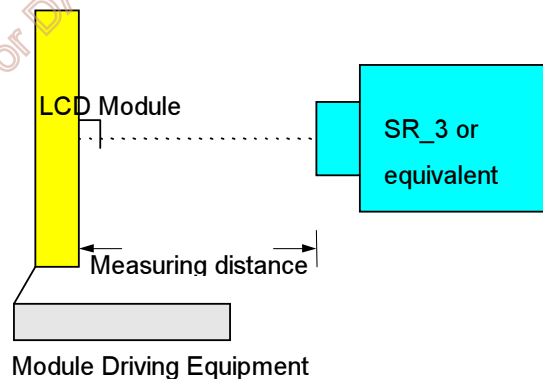

Note 2: Definition of 9 points position (Display active area : 304.128(H) x 228.096(V))

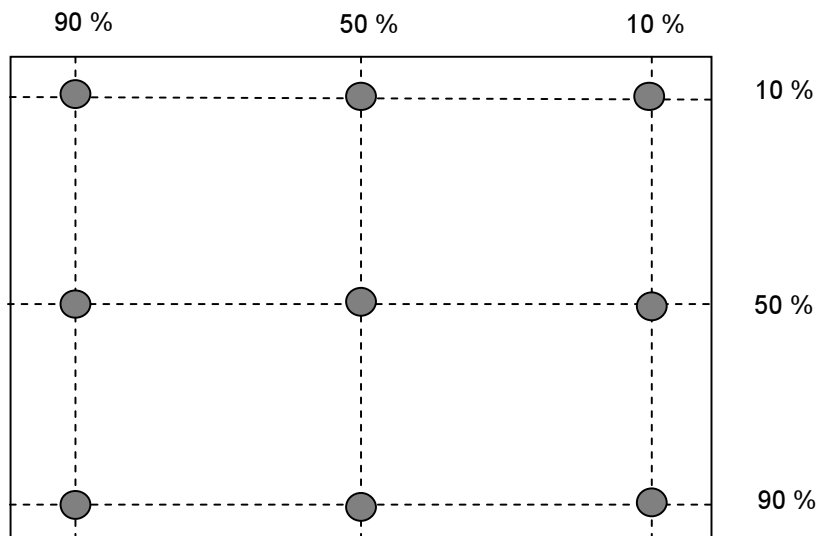

Note 3: The luminance uniformity of 9 points is defined by dividing the minimum luminance values by the maximum test point luminance

$$\delta_{w9} = \frac{\text{Minimum Brightness of nine points}}{\text{Maximum Brightness of nine points}}$$

Note 4 : Definition of contrast ratio (CR):

$$\text{Contrast ratio (CR)} = \frac{\text{Brightness on the "White" state}}{\text{Brightness on the "Black" state}}$$



Note 5 : Definition of cross talk (CT)

$$CT = |YB - YA| / YA \times 100 (\%)$$

Where

YA = Luminance of measured location without gray level 0 pattern (cd/m2)


YB = Luminance of measured location with gray level 0 pattern (cd/m2)

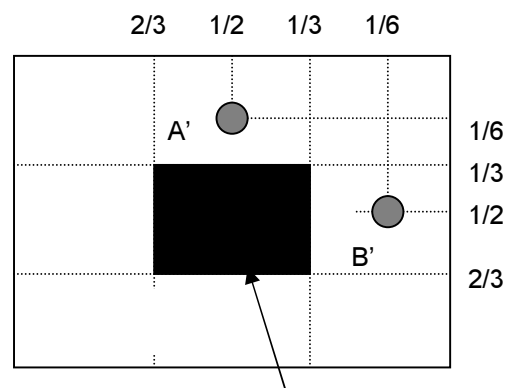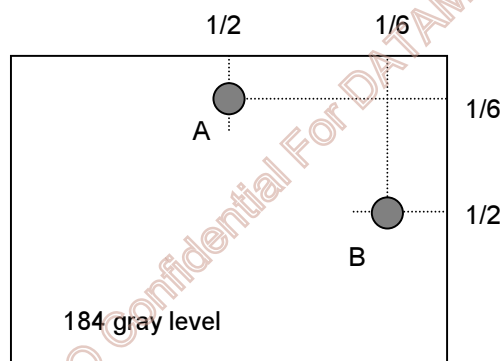




#### Note 6: Definition of response time:

The output signals of photo detector are measured when the input signals are changed from “White” to “Black” (falling time) and from “Black” to “White” (rising time), respectively. The response time interval is between 10% and 90% of amplitudes. Please refer to the figure as below.

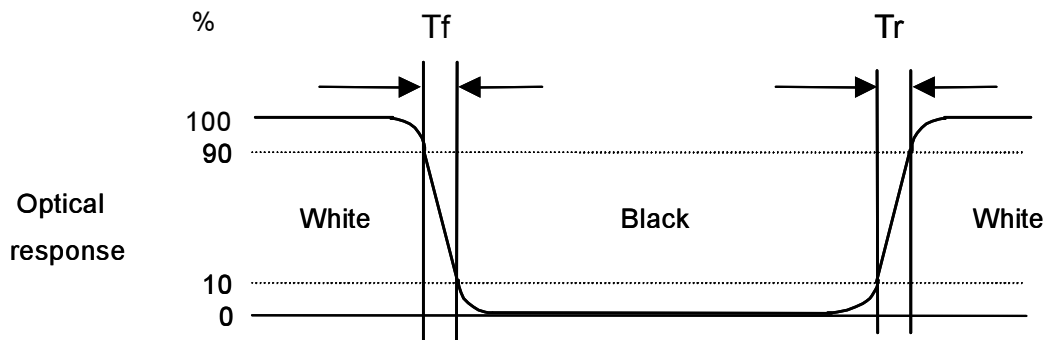


#### Note 7: Definition of viewing angle

Viewing angle is the measurement of contrast ratio  $\geq 10$ , at the screen center, over a  $180^\circ$  horizontal and  $180^\circ$  vertical range (off-normal viewing angles). The  $180^\circ$  viewing angle range is broken down as below:  $90^\circ$  ( $\theta$ ) horizontal left and right, and  $90^\circ$  ( $\phi$ ) vertical high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated to its center to develop the desired measurement viewing angle.

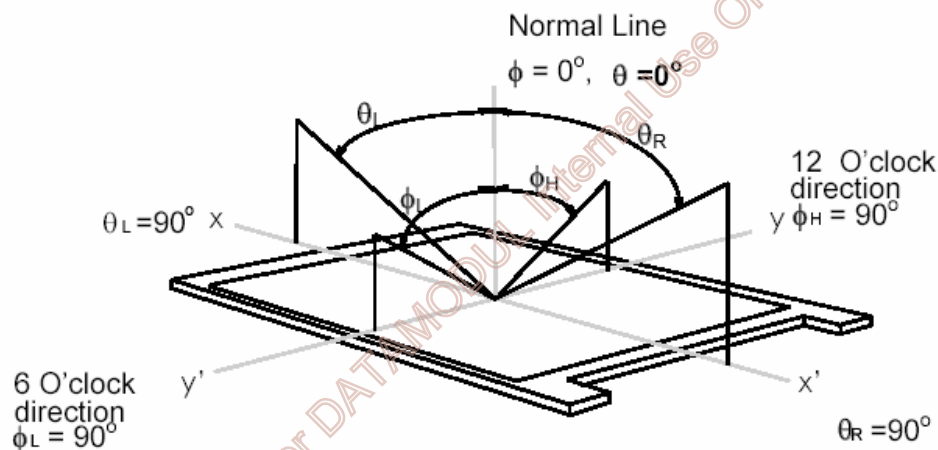

### 3. Functional Block Diagram

The following diagram shows the functional block of the 15 inch color TFT/LCD module:

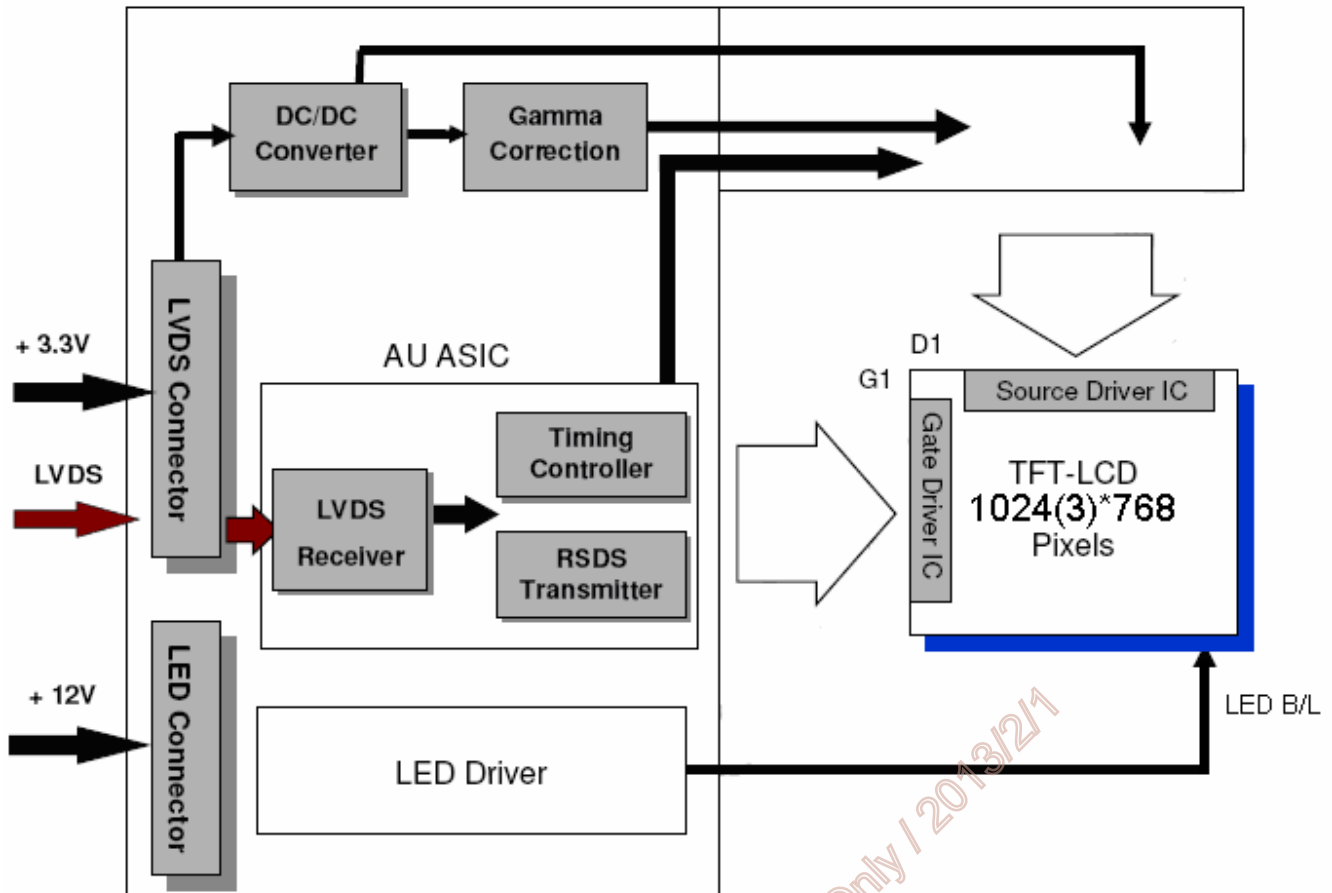

AUO Confidential For DATAMODUL Internal Use Only / 2013/2/1

## 4. Absolute Maximum Ratings


### 4.1 Absolute Ratings of TFT LCD Module

| Item                    | Symbol | Min  | Max  | Unit   |
|-------------------------|--------|------|------|--------|
| Logic/LCD Drive Voltage | Vin    | -0.3 | +4.0 | [Volt] |

### 4.2 Absolute Ratings of Environment

| Item                  | Symbol | Min | Max | Unit  |
|-----------------------|--------|-----|-----|-------|
| Operating Temperature | TOP    | -30 | +85 | [°C]  |
| Operation Humidity    | HOP    | 8   | 90  | [%RH] |
| Storage Temperature   | TST    | -30 | +85 | [°C]  |
| Storage Humidity      | HST    | 8   | 90  | [%RH] |

Note: Maximum Wet-Bulb should be 39°C and no condensation.

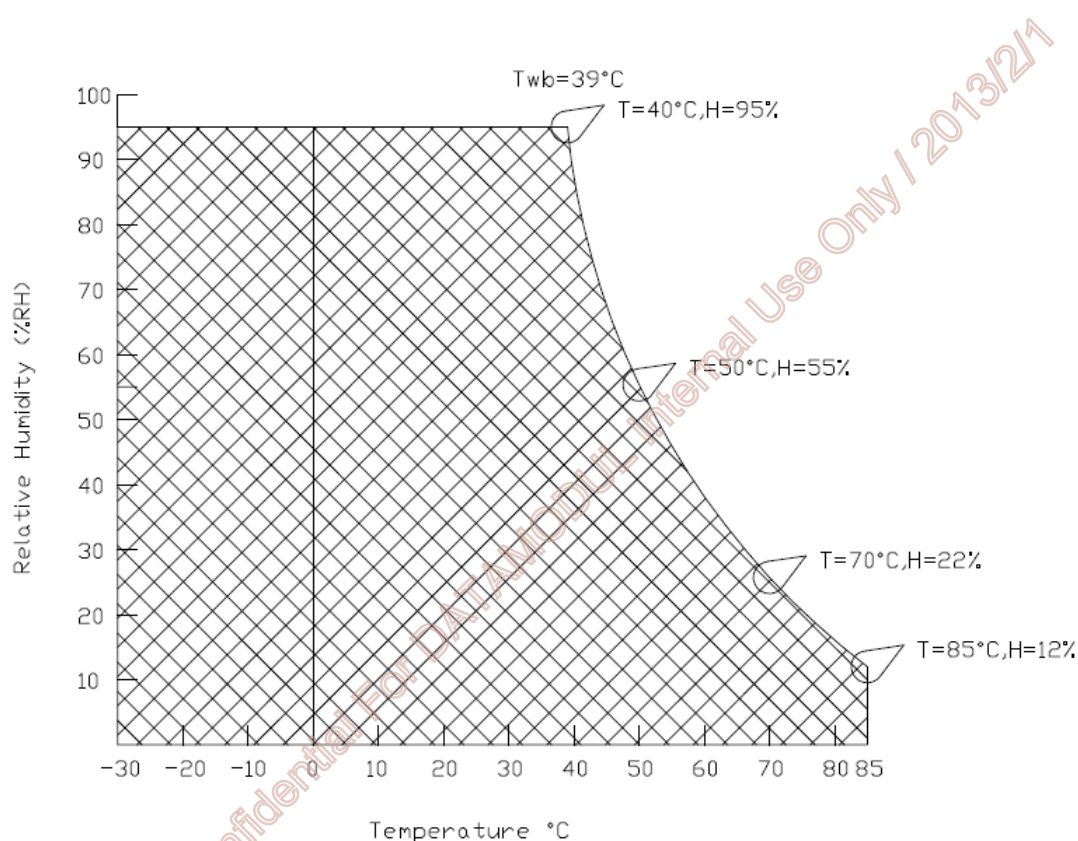

## 5. Electrical Characteristics

### 5.1 TFT LCD Module

#### 5.1.1 Power Specification

| Symbol | Parameter               | Min | Typ | Max | Units  | Remark                                     |
|--------|-------------------------|-----|-----|-----|--------|--------------------------------------------|
| VDD    | Logic/LCD Drive Voltage | 3.0 | 3.3 | 3.6 | [Volt] | ± 10%                                      |
| IDD    | VDD Current             | -   | 550 | 660 | [mA]   | 64 Gray Bar Pattern<br>(VDD=3.3V, at 60Hz) |
| PDD    | VDD Power               | -   | 1.9 | 2.2 | [Watt] | 64 Gray Bar Pattern<br>(VDD=3.3V, at 60Hz) |


AUO Confidential For DATAMODUL Internal Use Only / 2013/2/1

### 5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off.

| Symbol | Item                                   | Min. | Typ. | Max. | Unit | Remark         |
|--------|----------------------------------------|------|------|------|------|----------------|
| VTH    | Differential Input High Threshold      | -    | -    | 100  | [mV] | VCM=1.2V       |
| VTL    | Differential Input Low Threshold       | -100 | -    | -    | [mV] | VCM=1.2V       |
| VID    | Input Differential Voltage             | 100  | 400  | 600  | [mV] |                |
| VICM   | Differential Input Common Mode Voltage | 1.1  |      | 1.45 | [V]  | VTH/VTl=±100mV |

Note: LVDS Signal Waveform.

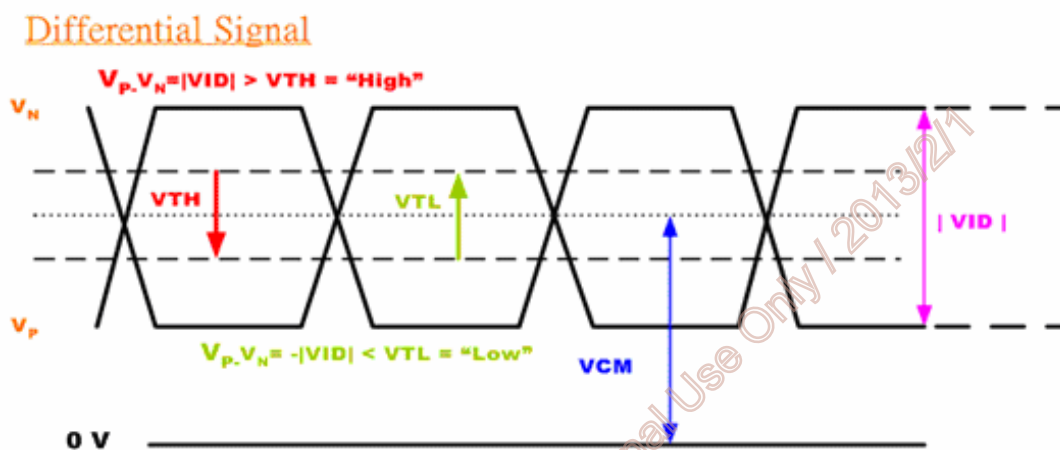

## 5.2 Backlight Unit

### 5.2.1 Parameter guideline for LED

Following characteristics are measured under stable condition using a LED driving board at 25℃ (Room Temperature).

| Symbol           | Parameter             | Min   | Typ  | Max  | Unit | Remark       |
|------------------|-----------------------|-------|------|------|------|--------------|
| V <sub>CC</sub>  | Input Voltage         | 10.8  | 12   | 12.6 | Volt |              |
| I <sub>VCC</sub> | Input Current         | -     | 0.48 | -    | A    | 100% Dimming |
| P <sub>LED</sub> | Power Consumption     | 5.18  | 5.76 | 6.05 | Watt | 100% Dimming |
| F <sub>PWM</sub> | PWM Dimming Frequency | 200   | -    | 20k  | Hz   |              |
|                  | Swing Voltage         | 4.5   | 5    | 5.5  |      |              |
|                  | Dimming Duty Cycle    | 5     | -    | 100  | %    |              |
| I <sub>F</sub>   | LED Forward Current   | -     | 80   |      | mA   | Ta = 25℃     |
| Operating Life   |                       | 50000 | -    | -    | Hrs  | Ta = 25℃     |

Note 1: Ta means ambient temperature of TFT-LCD module.

Note 2: If G150XTN05.0 module is driven at high ambient temperature & humidity condition. The operating life will be reduced.


Note 3: Operating life means brightness goes down to 50% initial brightness. Min. operating life time is estimated data.

AUO Confidential For DATAMODUL Internal Use Only / 2013/12/11

## 6. Signal Characteristic

### 6.1 Pixel Format Image

Following figure shows the relationship between input signal and LCD pixel format.

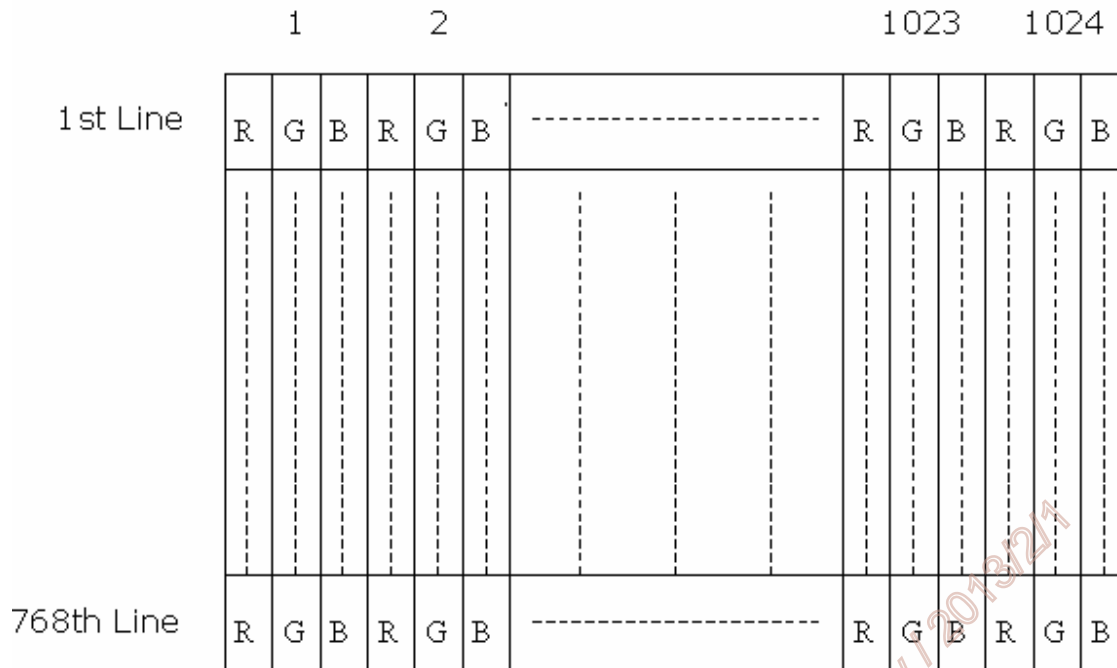

### 6.2 Scanning Direction

The following figures show the image seen from the front view. The arrow indicates the direction of scan.

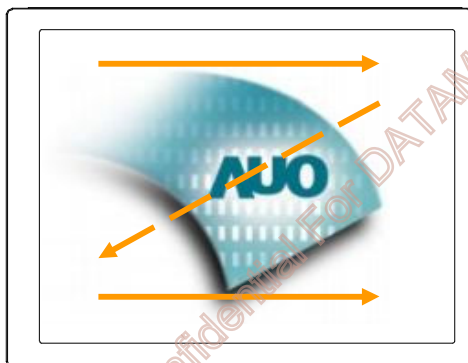


Fig. 1 Normal scan (Pin4, REV = Low or NC)

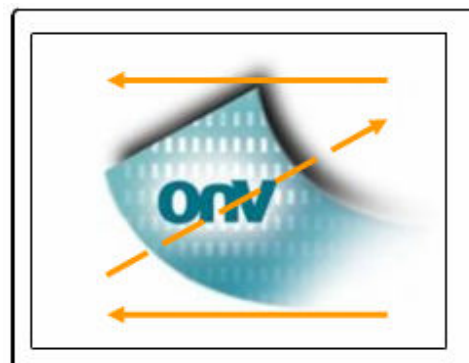


Fig. 2 Reverse scan (Pin4, REV = High)

### 6.3 Signal Description

The module using a pair of LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

| 3804-F20N-06R (E&T) / MSB240420E(STM) |        |                                                            |
|---------------------------------------|--------|------------------------------------------------------------|
| Pin No.                               | Symbol | Description                                                |
| 1                                     | VDD    | Power Supply, 3.3V (typical)                               |
| 2                                     | VDD    | Power Supply, 3.3V (typical)                               |
| 3                                     | VSS    | Ground                                                     |
| 4                                     | REV    | Reverse Scan selection *.Note1                             |
| 5                                     | Rin1-  | - LVDS differential data input (R0-R5, G0)                 |
| 6                                     | Rin1+  | + LVDS differential data input (R0-R5, G0)                 |
| 7                                     | VSS    | Ground                                                     |
| 8                                     | Rin2-  | - LVDS differential data input (G1-G5, B0-B1)              |
| 9                                     | Rin2+  | + LVDS differential data input (G1-G5, B0-B1)              |
| 10                                    | VSS    | Ground                                                     |
| 11                                    | Rin3-  | - LVDS differential data input (B2-B5, HS, VS, DE)         |
| 12                                    | Rin3+  | + LVDS differential data input (B2-B5, HS, VS, DE)         |
| 13                                    | VSS    | Ground                                                     |
| 14                                    | ClkIN- | - LVDS differential clock input                            |
| 15                                    | ClkIN+ | + LVDS differential clock input                            |
| 16                                    | VSS    | Ground                                                     |
| 17                                    | Rin4-  | - LVDS differential data input (R6-R7, G6-G7,B6-B7) *Note2 |
| 18                                    | Rin4+  | - LVDS differential data input (R6-R7, G6-G7,B6-B7) *Note2 |
| 19                                    | VSS    | Ground                                                     |
| 20                                    | SEL68  | Selection for 6 bits/8bits LVDS data input *Note1,3        |

Note 1: Input signals shall be in low status when VDD is off.

Note 2: If only the 6 bits mode is needed, pin 17 and pin 18 are suggested to be floated. (In this situation, 8 bits mode will be disable permanently)


Note 3: High stands for "3.3V", Low stands for "GND", NC stands for "No Connection".




## 6.4 The Input Data Format

### 6.4.1 SEL68

**SEL68 = "High" or "NC" for 6 bits LVDS Input**

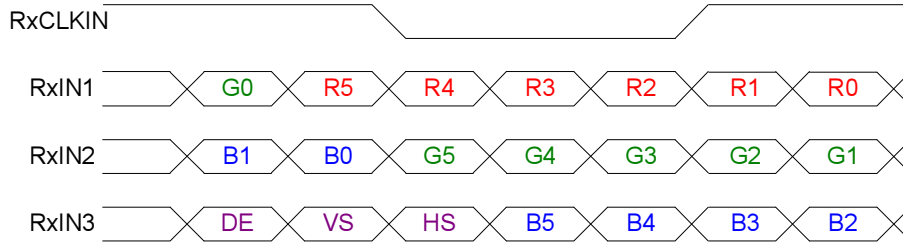

**SEL68 = "Low" for 8 bits LVDS Input**

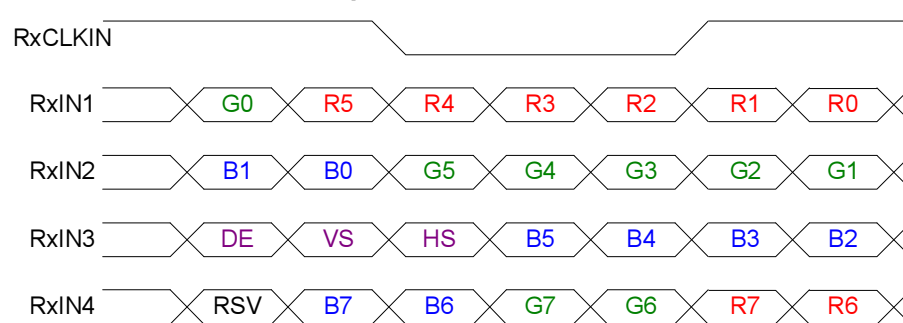

**Note1:** Please follow PSWG.

**Note2:** R/G/B data 7:MSB, R/G/B data 0:LSB

| Signal Name                                  | Description                                                                                                                  | Remark                                                                                                             |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| R7<br>R6<br>R5<br>R4<br>R3<br>R2<br>R1<br>R0 | Red Data 7<br>Red Data 6<br>Red Data 5<br>Red Data 4<br>Red Data 3<br>Red Data 2<br>Red Data 1<br>Red Data 0                 | Red-pixel Data<br><br>For 8Bits LVDS input<br>MSB: R7 ; LSB: R0<br><br>For 6Bits LVDS input<br>MSB: R5 ; LSB: R0   |
| G7<br>G6<br>G5<br>G4<br>G3<br>G2<br>G1<br>G0 | Green Data 7<br>Green Data 6<br>Green Data 5<br>Green Data 4<br>Green Data 3<br>Green Data 2<br>Green Data 1<br>Green Data 0 | Green-pixel Data<br><br>For 8Bits LVDS input<br>MSB: G7 ; LSB: G0<br><br>For 6Bits LVDS input<br>MSB: G5 ; LSB: G0 |
| B7<br>B6<br>B5<br>B4<br>B3<br>B2<br>B1<br>B0 | Blue Data 7<br>Blue Data 6<br>Blue Data 5<br>Blue Data 4<br>Blue Data 3<br>Blue Data 2<br>Blue Data 1<br>Blue Data 0         | Blue-pixel Data<br><br>For 8Bits LVDS input<br>MSB: B7 ; LSB: B0<br><br>For 6Bits LVDS input<br>MSB: B5 ; LSB: B0  |
| RxCLKIN                                      | LVDS Data Clock                                                                                                              |                                                                                                                    |
| DE                                           | Data Enable Signal                                                                                                           | When the signal is high, the pixel data shall be valid to be displayed.                                            |
| VS                                           | Vertical Synchronous Signal                                                                                                  |                                                                                                                    |
| HS                                           | Horizontal Synchronous Signal                                                                                                |                                                                                                                    |

Note: Output signals from any system shall be low or Hi-Z state when VDD is off.

## 6.5 Interface Timing


### 6.5.1 Timing Characteristics

| Signal       | Parameter             |          | Symbol                | Min. | Typ. | Max. | Unit               |
|--------------|-----------------------|----------|-----------------------|------|------|------|--------------------|
| Clock Timing | Clock frequency       |          | 1/ T <sub>Clock</sub> | 50   | 65   | 81   | MHz                |
| Vsync Timing | Vertical<br>Section   | Period   | T <sub>V</sub>        | 776  | 806  | 900  | T <sub>Line</sub>  |
|              |                       | Active   | T <sub>VD</sub>       | 768  | 768  | 768  |                    |
|              |                       | Blanking | T <sub>VB</sub>       | 8    | 38   | 132  |                    |
| Hsync Timing | Horizontal<br>Section | Period   | T <sub>H</sub>        | 1054 | 1344 | 2048 | T <sub>Clock</sub> |
|              |                       | Active   | T <sub>HD</sub>       | 1024 | 1024 | 1024 |                    |
|              |                       | Blanking | T <sub>HB</sub>       | 30   | 320  | 1024 |                    |
| Frame Rate   |                       |          | F                     | 50   | 60   | 75   | Hz                 |

Note: DE mode only.


Note : Typical value refer to VESA STANDARD

### 6.5.2 Input Timing Diagram

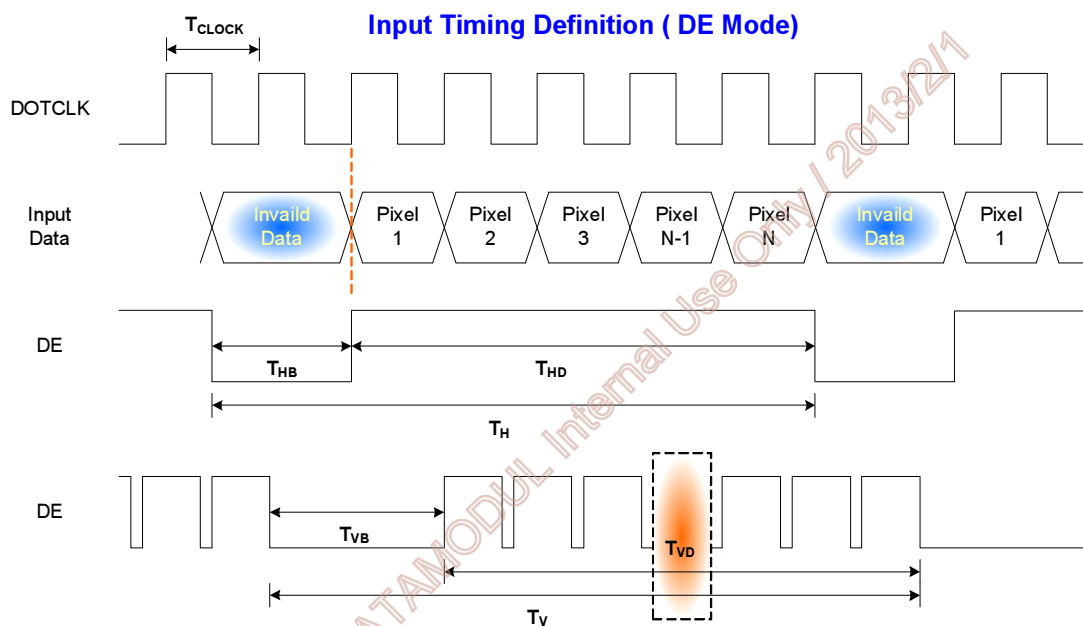

## 6.6 Power ON/OFF Sequence

VDD power and LED on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

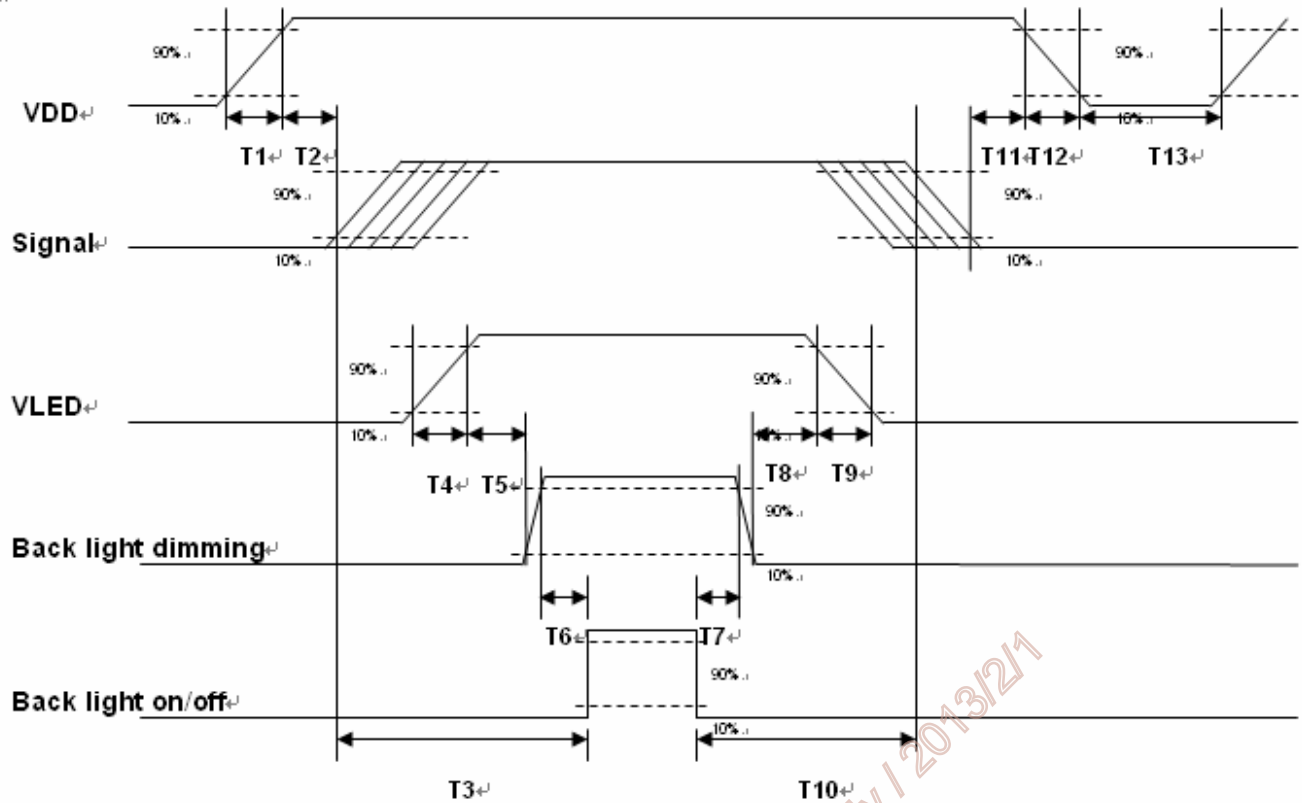

### Power ON/OFF sequence timing

| Parameter | Value |      |      | Units |
|-----------|-------|------|------|-------|
|           | Min.  | Typ. | Max. |       |
| T1        | 0.5   | --   | 10   | [ms]  |
| T2        | 30    | 40   | 50   | [ms]  |
| T3        | 200   | --   | --   | [ms]  |
| T4        | 0.5   | --   | 10   | [ms]  |
| T5        | 10    | --   | --   | [ms]  |
| T6        | 10    | --   | --   | [ms]  |
| T7        | 0     | --   | --   | [ms]  |
| T8        | 10    | --   | --   | [ms]  |
| T9        | --    | --   | 10   | [ms]  |
| T10       | 110   | --   | --   | [ms]  |
| T11       | 0     | 16   | 50   | [ms]  |
| T12       | --    | --   | 10   | [ms]  |
| T13       | 1000  | --   | --   | [ms]  |

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.

## 7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.


### 7.1 TFT LCD Module: LVDS Connector

| Connector Name / Designation | Signal Connector           |
|------------------------------|----------------------------|
| Manufacturer                 | E&T or compatible          |
| Connector Model Number       | 3804-F20N-06R / MSB240420E |
| Adaptable Plug               | HRS DF14-20S-1.25C         |


| Pin# | Signal Name | Pin# | Signal Name |
|------|-------------|------|-------------|
| 1    | VDD         | 2    | VDD         |
| 3    | VSS         | 4    | REV         |
| 5    | Rin1-       | 6    | Rin1+       |
| 7    | VSS         | 8    | Rin2-       |
| 9    | Rin2+       | 10   | VSS         |
| 11   | Rin3-       | 12   | Rin3+       |
| 13   | VSS         | 14   | ClkIN-      |
| 15   | ClkIN+      | 16   | VSS         |
| 17   | Rin4-       | 18   | Rin4+       |
| 19   | VSS         | 20   | SEL68       |

AUO Confidential For DATAMODUL Internal Use Only / 2013/2/1


## 7.1.1 Connector Illustration

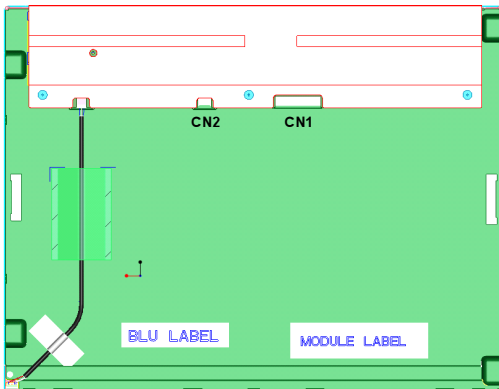

### LVDS(CN1):

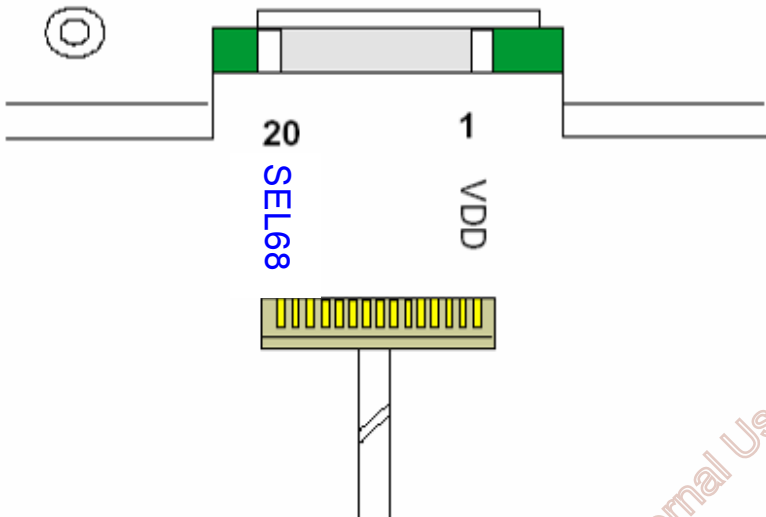

### BLU Power in(CN2):

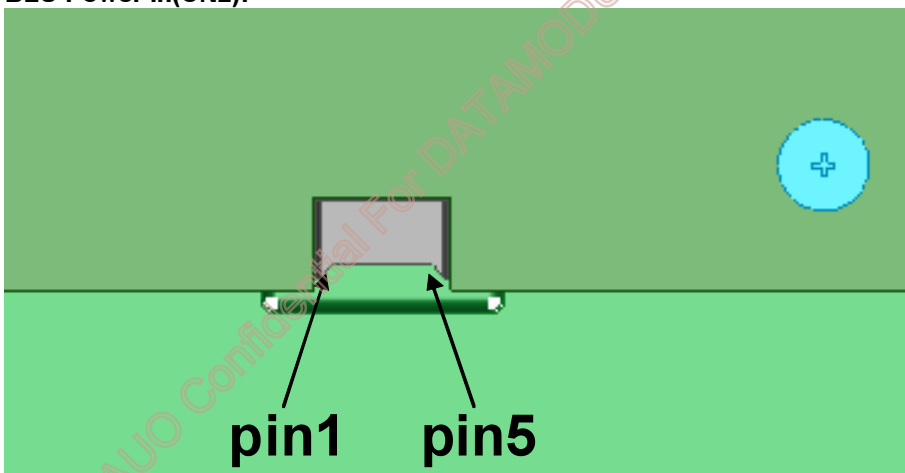

## 7.2 Backlight Unit: LED Driver Connector

| Connector Name / Designation | LED Driver Connector         |
|------------------------------|------------------------------|
| Manufacturer                 | ENTERY or compatible         |
| Connector Model Number       | 3808K-F05N-02R or compatible |
| Mating Model Number          | H208K-P05N-02B or compatible |

## 7.3 LED Connector Pin Assignment

| Pin# | Symbol  | Signal Name    |
|------|---------|----------------|
| 1    | Vcc     | 12V            |
| 2    | GND     | GND            |
| 3    | Enable  | 5V-On / 0V-Off |
| 4    | Dimming | PWM Dimming    |
| 5    | NC      | NC             |

AUO Confidential For DATAMODUL Internal Use Only / 2013/12/11

## 8. Reliability Test Criteria


| Items                          | Required Condition                                                                                                                            | Note   |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|--------|
| Temperature Humidity Bias      | 50°C/80%,300 hours                                                                                                                            |        |
| High Temperature Operation     | 85°C,300 hours                                                                                                                                |        |
| Low Temperature Operation      | -30°C,300 hours                                                                                                                               |        |
| Hot Storage                    | 85°C,300 hours                                                                                                                                |        |
| Cold Storage                   | -30°C,300 hours                                                                                                                               |        |
| Thermal Shock Test             | -20°C/30 min ,60□/30 min ,100cycles                                                                                                           |        |
| Shock Test (Non-Operating)     | 50G,20ms,Half-sine wave,( ±X, ±Y, ±Z)                                                                                                         |        |
| Vibration Test (Non-Operating) | 1.5G, (10~200Hz, P-P)<br>30 mins/axis (X, Y, Z)                                                                                               |        |
| On/off test                    | On/10 sec, Off/10 sec, 30,000 cycles                                                                                                          |        |
| ESD                            | Contact Discharge: ± 8KV, 150pF(330Ω ) 1sec, 8 points, 25 times/ point<br>Air Discharge: ± 15KV, 150pF(330Ω ) 1sec, 8 points, 25 times/ point | Note 1 |

Note1: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost  
. Self-recoverable. No hardware failures.

AUO Confidential For DATAMODUL Internal Use Only / 2015/04/14

## 9. Mechanical Characteristics


### 9.1 LCM Outline Dimension (Front View and back view)

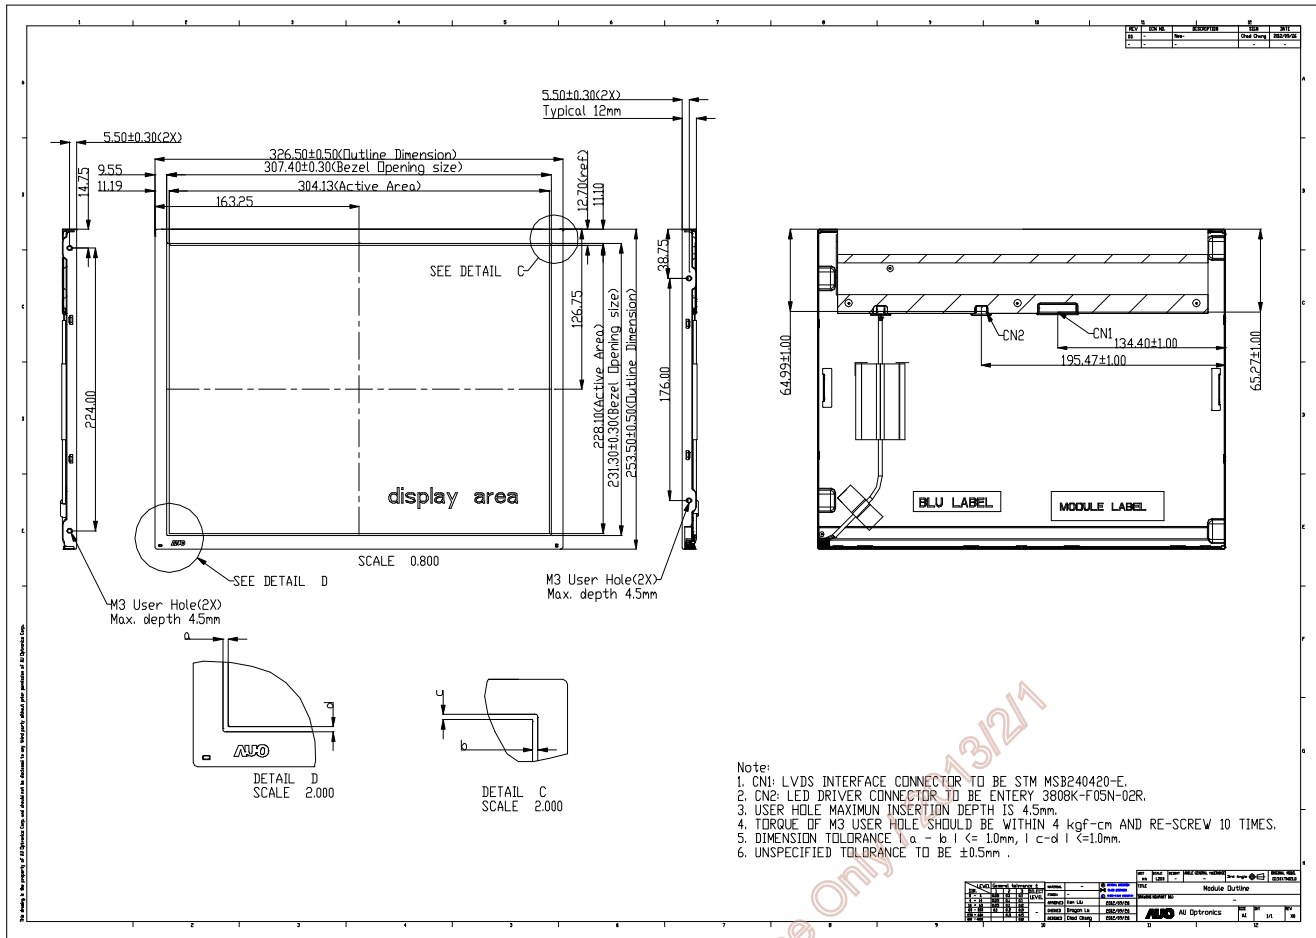




## 10. Label and Packaging

### 10.1 Shipping Label (on the rear side of TFT-LCD display)

|                                                                                                           |                                                                                                |                       |                                                                                                                                                                                                                                                                   |
|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>*XXXXXXXXXXXX-XXXXX* | Manufactured XX/XX<br>Model No: <b>G150XTN05.0</b><br>AU Optronics XXXXX<br>MADE IN XXXXX (XX) | CE<br>E204356<br>RoHS | <br><br> |
|                                                                                                           |                                                                                                |                       |                                                                                                                                                                                                                                                                   |

### 10.2 Carton Package

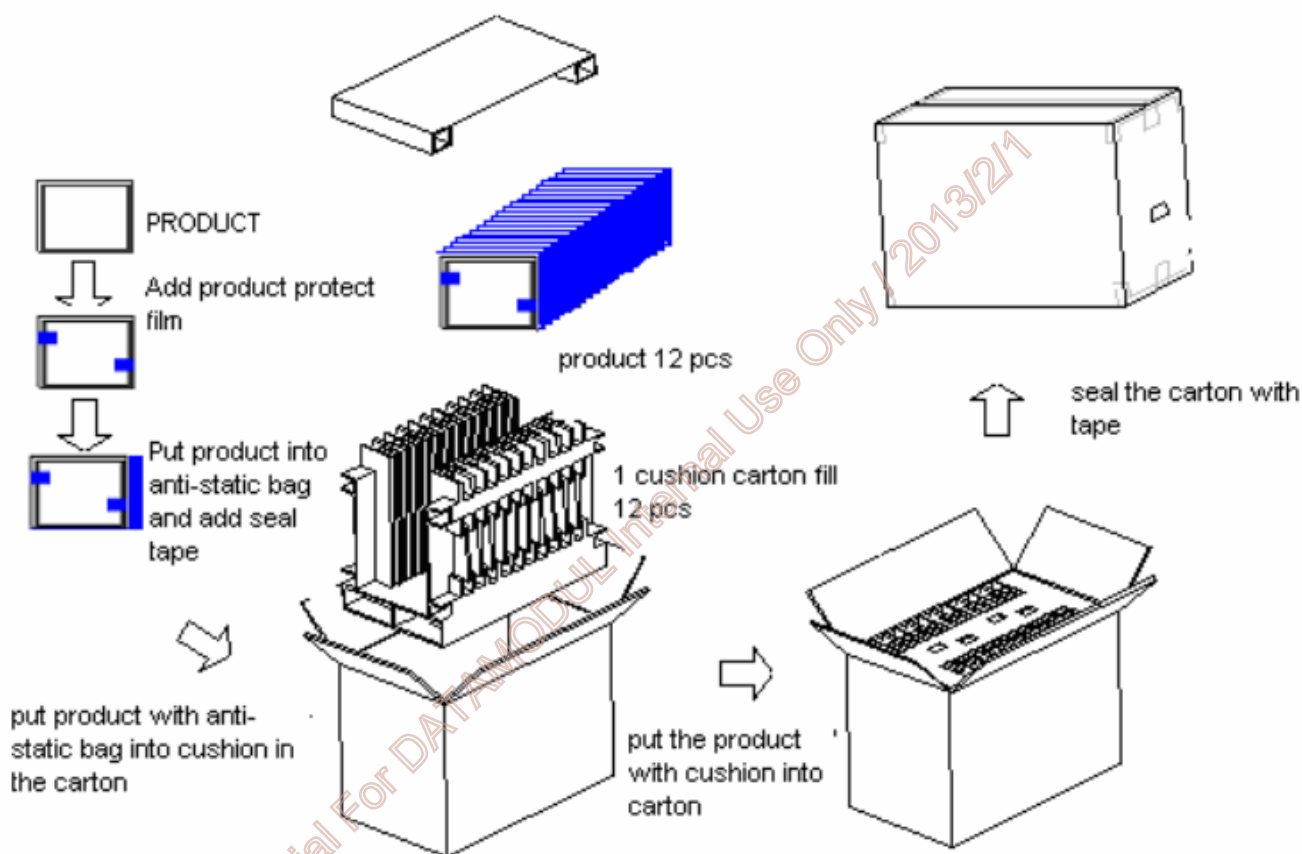

Carton capacity: 12 pcs  
 Carton weight: 12.56Kg  
 Carton outline: 430mm\*384mm\*350mm

## 11 Safety

### 11.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

### 11.2 Materials

#### 11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

#### 11.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

### 11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

### 11.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

**UL 1950, First Edition**

**U.S.A. Information Technology Equipment**

AUO Confidential For DATAMODUL Internal Use Only / 2013/21

**DATA MODUL Headquarters Munich**

Landsberger Str. 322  
D-80687 Munich - Germany  
Phone: +49-89-56017-0  
Fax: +49-89-56017-119  
[www.data-modul.com](http://www.data-modul.com)

**Sales Office Hamburg**

Borsteler Chaussee 51  
D-22453 Hamburg - Germany  
Phone: +49-40-42947377-0

**Sales Office Duesseldorf**

Fritz-Vomfelde-Str. 8  
D-40547 Duesseldorf - Germany  
Phone: +49-211-52709-0

**Sales Office Scandinavia**

Lundsmindevej 5  
DK-6000 Kolding - Denmark  
Phone: +45-75-224477

**DATA MODUL FRANCE**

7 rue Saint Christophe  
F-60300 BARON - FRANCE  
Phone: +33-3-44549699

**DATA MODUL Italy, S.r.l.**

Regus Center Senigallia  
Via Senigallia 18/2  
I-20161 Milano - Italy  
Phone: +39-02-64672509

**DATA MODUL Iberia, S.L.**

c/ Adolfo Pérez Esquivel 3  
Edificio Las Americas III Oficina 40  
28230 Parque Empresarial  
Las Rozas / Madrid - Spain  
Phone: +34-916-366458

**DATA MODUL Suisse GmbH**

Stationsstr. 57  
CH-8606 Nänikon - Switzerland  
Phone: +41-44-94091-50

**DATA MODUL Ltd. / UK**

Collins Building  
3 Vigo Place - Aldridge - Walsall  
WS9 8UG - United Kingdom  
Phone: +44-1922-457358

**DATA MODUL Inc. / USA**

275 Marcus Blvd, Unit K  
Hauppauge, NY 11788 - USA  
Phone: +1-631-951-0800