
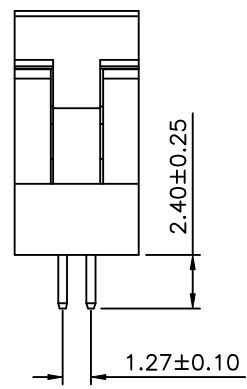
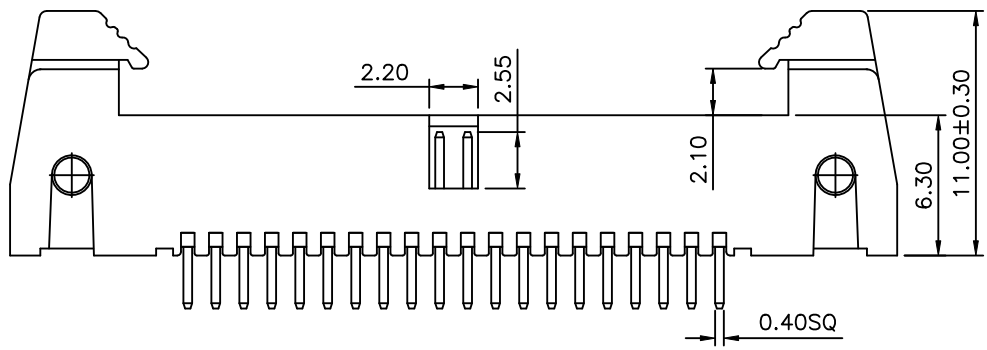


Recommended P.C.B Layout

SPECIFICATION
 Current Rating:1 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

HAL D XXX - H H
 (1) (2) (3) (4) (5)
 (1) HAL:1.27X1.27mm Latch Header
 (2) D:DIP Straight
 (3) XXX:No. Of Position
 (4) H:Withstand High Temperature Soldering
 (5) H:RoHS Compliant

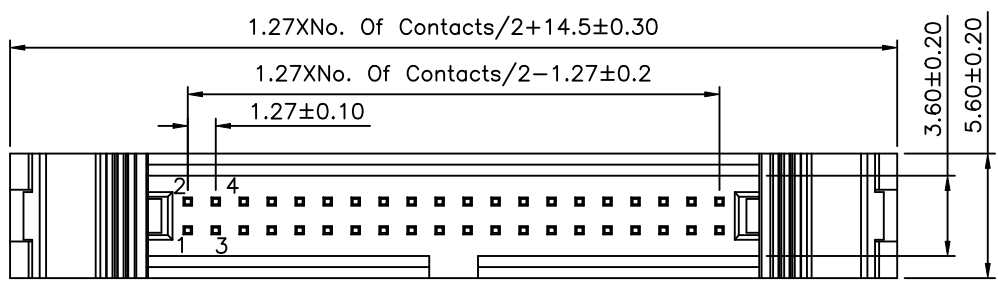

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20
PART No. HALDXXX-HH		MEI		
DRAWING No. HALDXXX-HH		HZF		
SCALE NONE		CYP		
REV.	A0	UNIT mm		

NO.	REV.	DESCRIPTION	CHK	DATE
△	A0	NEW RELEASE	HZF	11/10/2016
REVISIONS		CHK	DATE	