


Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)


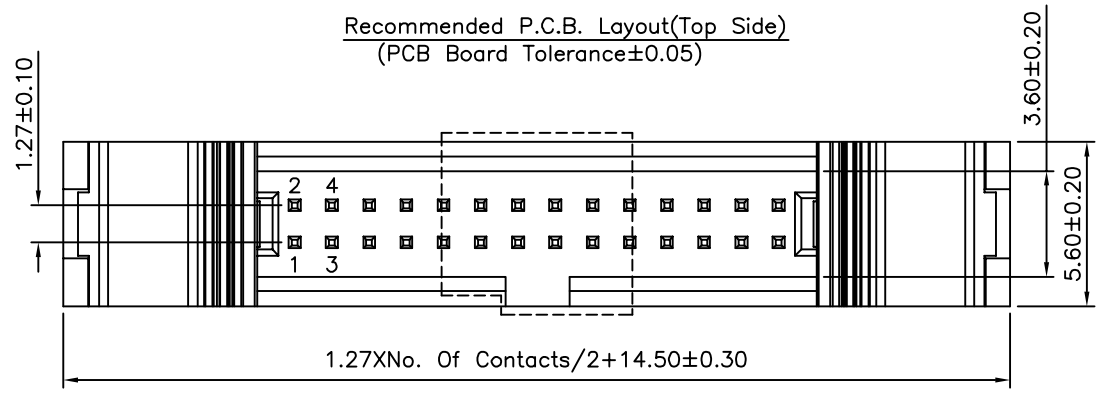


SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass
Insulator:PA9T+30%G.F.(UL94V-0),Black
RoHS Compliant

HAL V XXX C - GXX - H
(1) (2) (3) (4) (5) (6)

- (1) HAL:1.27X1.27 Latch Header
- (2) V:SMT Straight
- (3) XXX:No. Of Position
- (4) C:With Cap
- (5) GXX:Gold Flash Over All,Over Nickel
G10:Gold Plated 10u' Over All,Over Nickel
G15:Gold Plated 15u' Over All,Over Nickel
G30:Gold Plated 30u' Over All,Over Nickel
- (6) H:RoHS Compliant

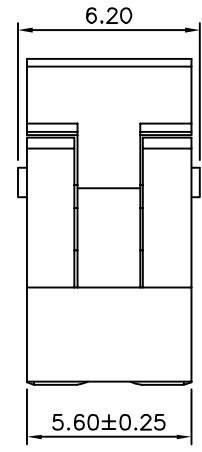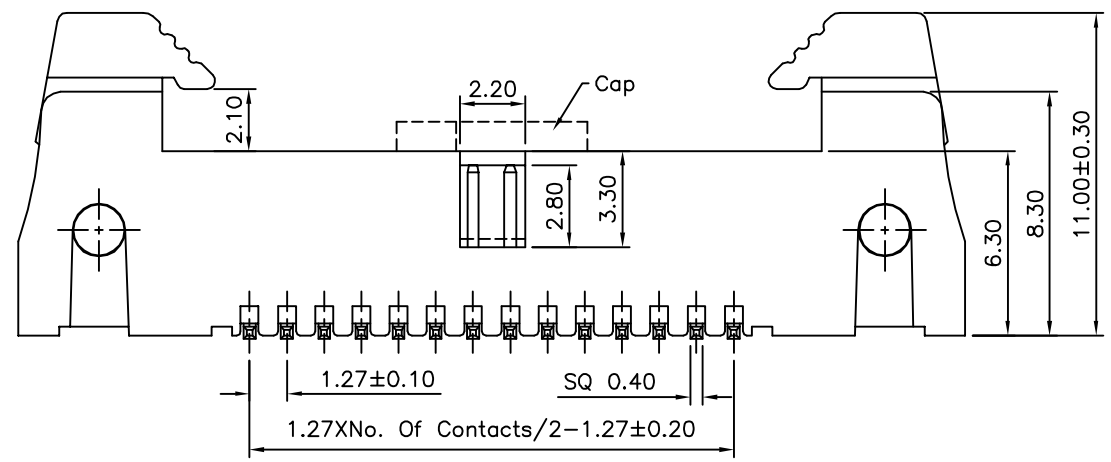

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No. HALVXXXC-GXX-H		EMILY	
DRAWING No. HALVXXXC-GXX-H		CHECKED BY HZF	
SCALE NONE		DRAWING BY HAO	
REV.	BO	REV.	BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

NO.	REV.	REVISIONS	CHK	DATE
△	BO	Modify P/N:HALVXXXC-H --> HALVXXXC-GXX-H	HZF	01/02/2015
△	BO	NEW RELEASE	HZF	01/02/2015