
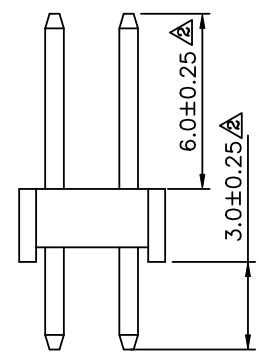
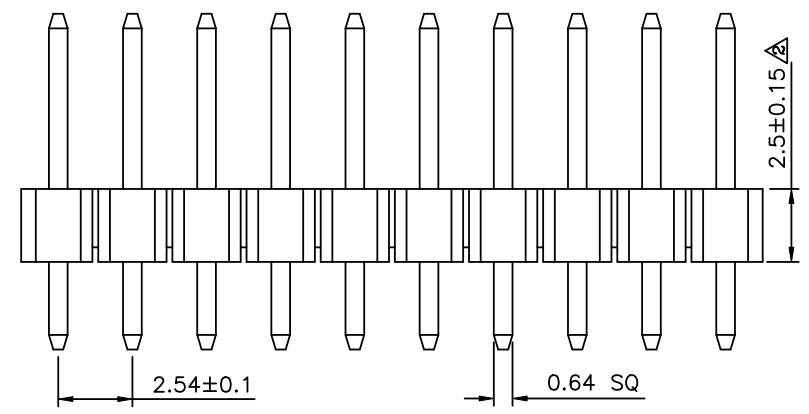
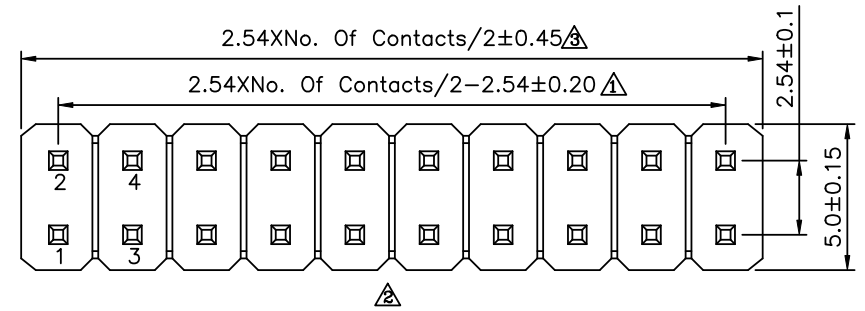


SPECIFICATION
 Current Rating:3 Amp
 Withstanding Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Plated Over Nickel
 Insulator:PBT(UL94V-0),Black
 RoHS Compliant

- $\frac{H}{(1)} \frac{D}{(2)} \frac{2}{(3)} \frac{X}{(4)} \frac{XX}{(5)} - \frac{H}{(5)}$
- (1) H:2.54mm Pin Header
 - (2) D:DIP Straight
 - (3) 2: Dual Row
 - (4) XX:No. Of Position/Per Row
 - (5) H:RoHS Compliant

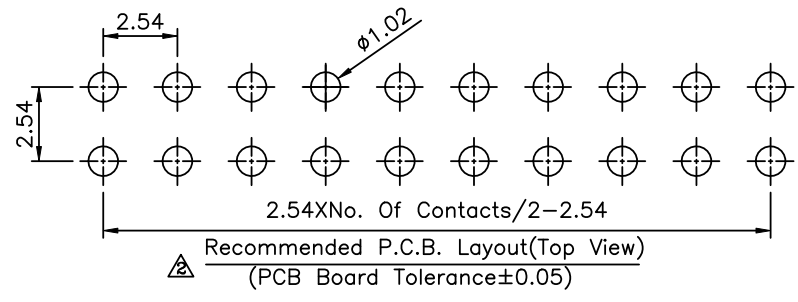

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2* .X ±0.20 X.* ±1.5* .XX ±0.15 .XX* ±1* .XXX ±0.10 .XXX* ±0.5*
PART No. HD2XXX-H		MEI		
DRAWING No. HD2XXX-H		HZF		
SCALE NONE		CYP		
REV.	A3	UNIT mm	NO.REV.	

NO.	REV.	REVISIONS	CHK	DATE
A3		Modify Data	HZF	01/04/2017
A2		Modify Data	HZF	04/08/2016
A1		Modify Dim. A±0.1-->A±0.3	HZF	02/22/2011
A0		NEW RELEASE	HZF	12/09/2009