




**SPECIFICATION**

Current Rating:1A Max.  
 Dielectric Withstanding Voltage:500V AC For 1 Minute  
 Contact Resistance:30 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min. At 500V DC  
 Temperature Range:-55°C~+105°C  
 Total Mating Force:4.0 Kgf Max.  
 Total Unmating Force:1.5 Kgf Min.  
 RoHS Compliant

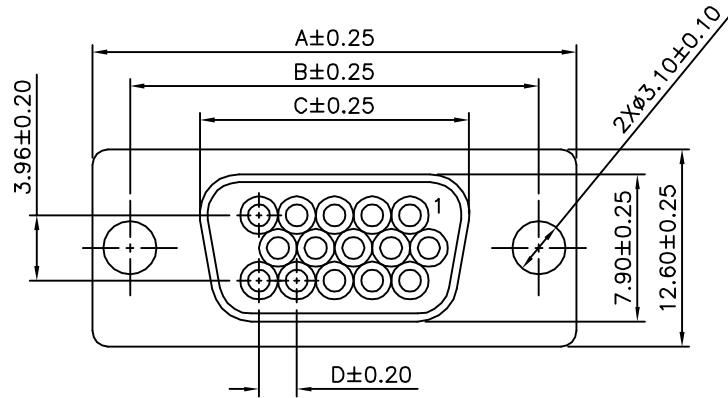

△ HDC XX ST - H  
 (1) (2) (3) (4)

- (1) HDC:2.29mm High Density  
D-SUB Crimp Type
- (2) XX:No. Of Position
- (3) ST:Female Tray Packing
- (4) H:RoHS Compliant

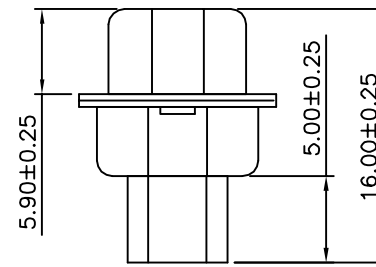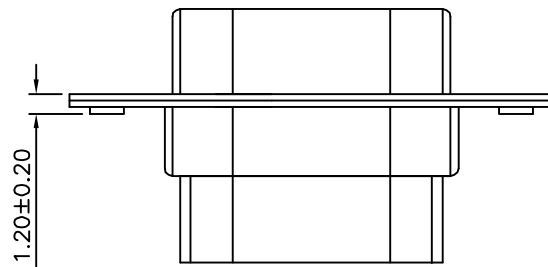

Pin	A	B	C	D
15	30.80	25.00	16.33	2.29
26	39.20	33.32	24.66	2.29
44	53.05	47.04	38.38	2.29
62	69.40	63.50	54.84	2.41

No.	Part Name	Q'ty	Material	Remark
1	Housing	2	PBT,UL94V-0	Black
2	Contact	15~62	Brass	Gold Flash Over Nickel
3	Front-Shell	1	Cold Rolled Steel	Tin Plated
4	Back-Shell	1	Cold Rolled Steel	Tin Plated

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY	
PART No. HDCXXST-H		MEI	
DRAWING No. HDCXXST-H		CHECKED BY HZF	
SCALE NONE		DRAWING BY SONG	
REV.	B1	UNIT mm	7

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE  
 .X ±0.3  
 .XX ±0.20  
 .XXX ±0.100  
 ANG. ±1°

NO.	REV.	REVISIONS	CHK	DATE
△ B1		Modify Data	HZF	05/17/2013
△ B0		NEW RELEASE	HZF	11/15/2008