



SPECIFICATION

▲ Current Rating: 1 Amps
 Withstanding Voltage: 1000V (1 Minute)
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min. At 500V DC
 Operating Temperature: -50°C ~ +105°C
 Shell: SPCC, Front: Nickel Plated, Rear: Tin Plated
 Insulator: PBT+30%G.F. (UL94V-0)
 Contact: Brass, Gold Flash On Contact Area,
 Tin Plated On Solder Tails, Over Nickel
 RoHS Compliant


- ▲ HDS XX P T - XX - H
 (1) (2) (3) (4) (5) (6)
 (1) HDS: 2.29mm High Density D-SUB Solder Wire Type
 (2) XX: No. Of Position
 (3) P: Male
 (4) T: Tray Packing
 ▲ (5) XX: Insulator Color
 Blank: Blue
 BK: Black
 WH: White
 (6) H: RoHS Compliant

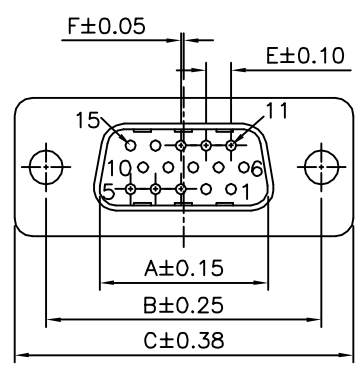


▲

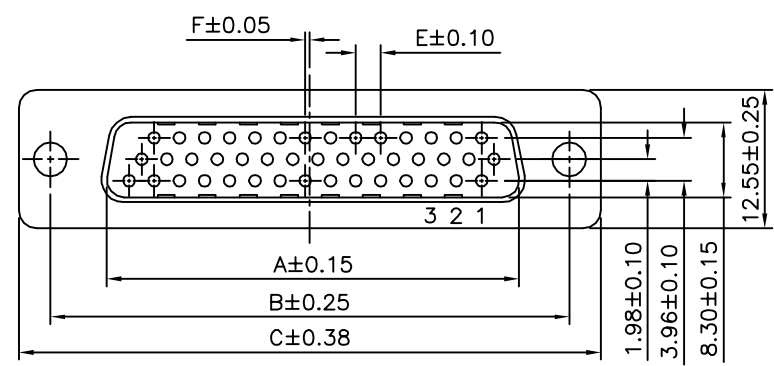


▲

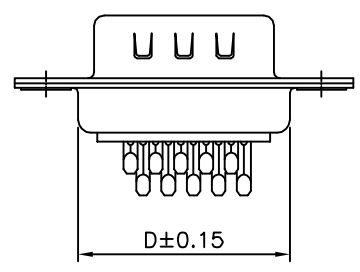

▲▲ 15 Pin

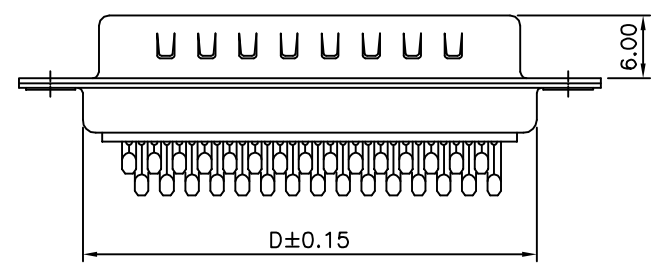

▲▲ 26,44,62 Pin



▲

| Pin. | A | B | C | D | E | F |
|------|-------|-------|-------|-------|------|------|
| 15 | 16.92 | 24.99 | 30.81 | 19.20 | 2.29 | 0.25 |
| 26 | 25.24 | 33.32 | 39.20 | 27.60 | 2.29 | 0.50 |
| 44 | 38.96 | 47.04 | 53.04 | 41.00 | 2.29 | 0.50 |
| 62 | 55.42 | 63.50 | 69.40 | 57.30 | 2.41 | 0.60 |

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | |
|-----------------------------|--|-------------------|----|--|
| CATEGORY | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .X* ±3* .XX ±0.25 .XX* ±1* .XXX ±0.05 .XXX* ±0.5 |
| PART No. HDSXXPT-XX-H | | EMILY | | |
| DRAWING No. HDSXXPT-XX-H | | CHECKED BY HZF | | |
| SCALE | | DRAWING BY CYP | | |
| NONE | | REV. | A4 | UNIT mm |

| | | | |
|----------|-------------|-----|------------|
| ▲ A4 | Modify Data | HZF | 04/29/2015 |
| ▲ A3 | Modify Dim. | HZF | 03/26/2013 |
| ▲ A2 | Modify Data | HZF | 01/07/2013 |
| ▲ A1 | Modify Data | HZF | 11/10/2012 |
| ▲ A0 | NEW RELEASE | HZF | 06/17/2008 |
| NO. REV. | REVISIONS | CHK | DATE |