
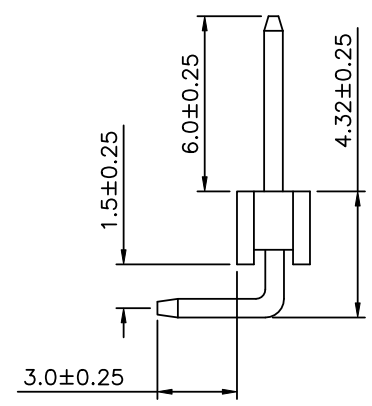
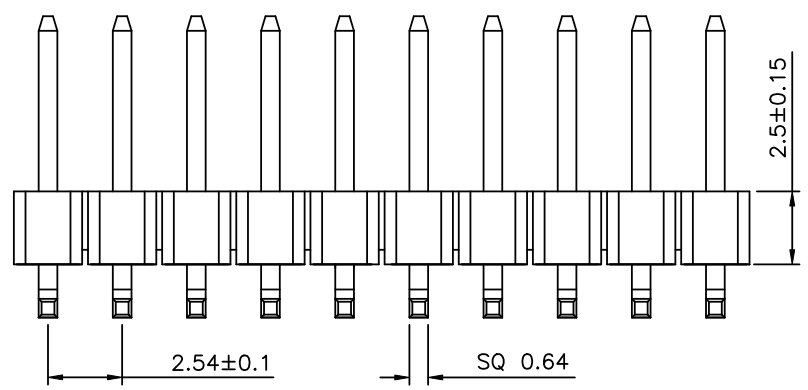


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance±0.05)

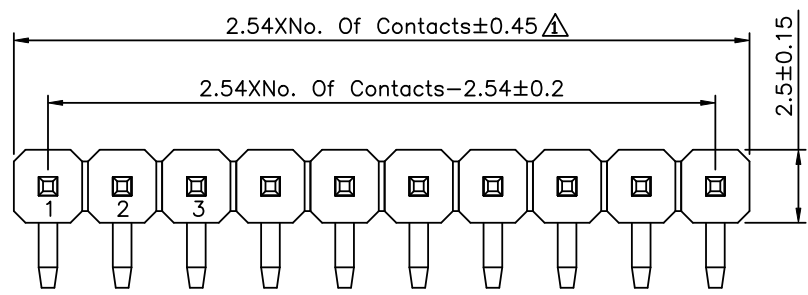

**SPECIFICATION**

Current Rating:3 Amp  
 Withstand Voltage:1000V AC  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Operating Temperature:-40°C~+105°C  
 Housing:PA6T(UL94V-0),Black  
 Contact:Brass,Gold Flash Over Nickel  
 RoHS Compliant

$\frac{H}{(1)} \frac{L}{(2)} \frac{1}{(3)} \frac{X}{(4)} \frac{XX}{(5)} - \frac{H}{(6)} \frac{H}{(6)}$

- (1) H:2.54mm Pin Header
- (2) L:DIP Right Angle Low Profile
- (3) 1:Single Row
- (4) XX:No. Of Position/Per Row
- (5) H:Withstand High Temperature Soldering
- (6) H:RoHS Compliant



A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY	
PART No. HL1XXX-HH		MEI	
DRAWING No. HL1XXX-HH		CHECKED BY HZF	
SCALE NONE		DRAWING BY CYP	
REV.	A1	UNIT	mm

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X	±0.25	X'	±2°
Y	±0.20	XX	±1.5°
.XX	±0.15	.XXX	±0.5°
.XXX	±0.10		

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Tol.	HZF	12/19/2016
△	A0	NEW RELEASE	HZF	11/22/2014