
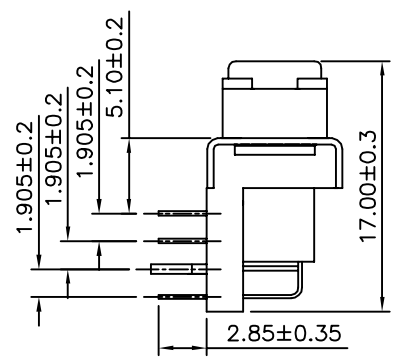
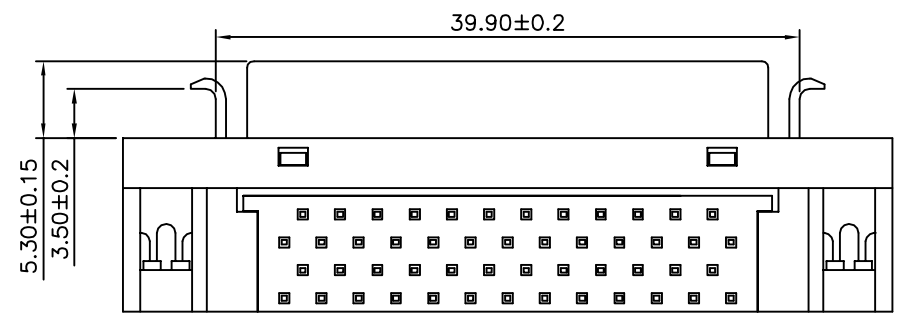


Recommended P.C.B. Layout

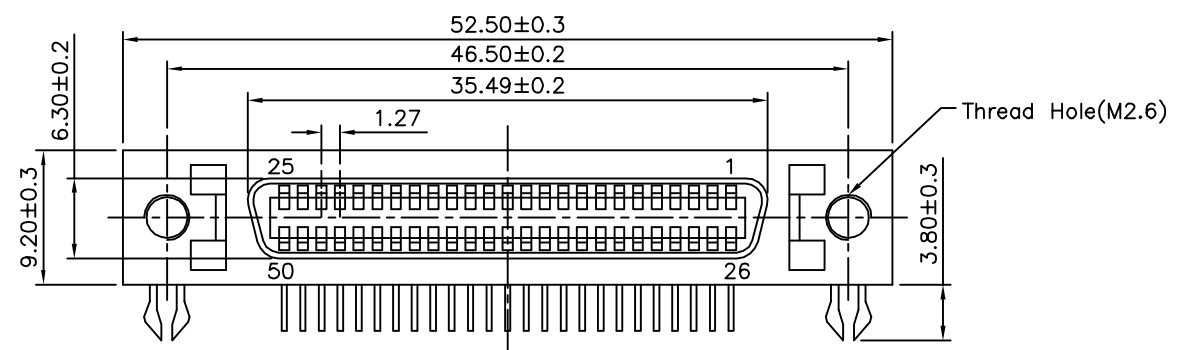

△△ SPECIFICATION
 Contact Current Rating:0.5 Amp
 Dielectric Withstanding Voltage:500V AC
 Contact Resistance:35 Milliohms Max.
 Insulation Resistance:>500 Megaohms Min.
 Operation Temperature:-55°C~+85°C
 Housing And Cover:PBT(UL94V-0),Black
 Contacts:Phosphor Bronze,Selective Gold Plated 5u"
 Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 Bracket:Steel,Nickel Plated Over Copper
 Boardlock:Brass,Tin Plated Over Copper
 RoHS Compliant

- △ HPC 050 S R - H**
 (1) (2) (3) (4) (5)
- (1) HPC:1.27mm SCSI Ribbon Type
 - (2) 050:No. Of Position
 - (3) S:Female
 - (4) R:DIP Right Angle
 - (5) H:RoHS Compliant

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.
PART No. HPC050SR-H		EMILY		
DRAWING No. HPC050SR-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY SONG		
REV.	A2	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△	A2	Modify Data	HZF	04/02/2013
△	A1	Modify Data	HZF	08/30/2010
△	A0	NEW RELEASE		