
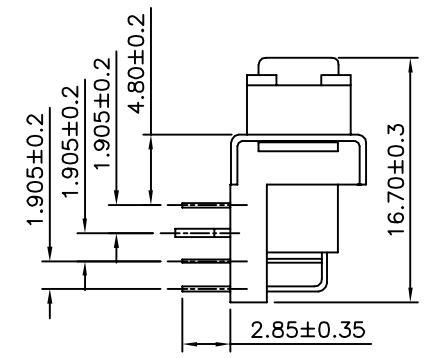
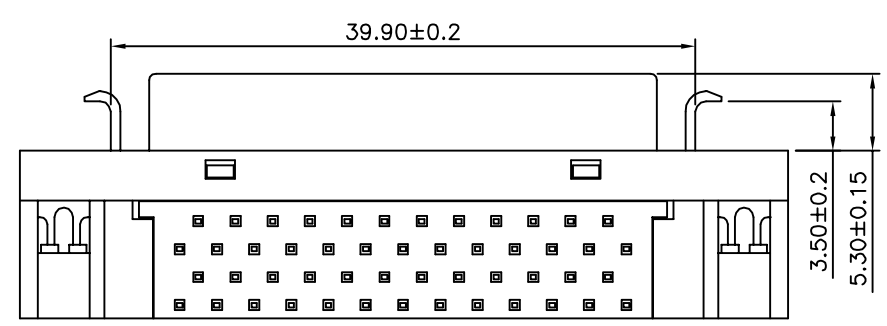


Recommended P.C.B. Layout

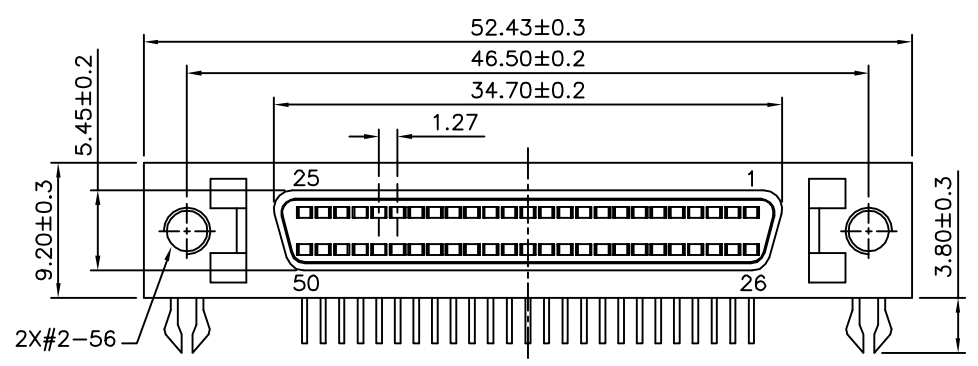

△ SPECIFICATION

Contact Current Rating:0.5A
 Dielectric Withstanding Voltage:500V AC
 Insulation Resistance:>500 Megaohms Min.
 Contact Resistance:35 Milliohms Max.
 Operation Temperature:-55°C~+85°C
 Housing And Cover:PBT(UL94V-0),Black
 Contact:Phosphor Bronze
 Selective Gold Plated 5u" Over Nickel
 Front Shell:Steel,Nickel Plated Over Copper
 Bracket:Steel,Nickel Plated Over Copper
 Boardlock:Brass,Tin Plated Over Copper
 RoHS Cpmpliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. HPD050SR-H		CHECKED BY HZF	
DRAWING No. HPD050SR-H		DRAWING BY SONG	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.38
 .XX ±0.25
 ANG.

NO.	REV.	REVISIONS	CHK	DATE
△ A1		Modify Data	HZF	04/02/2012
△ A0		NEW RELEASE	HZF	09/09/2010