


Recommended P.C.B. Layout



SPECIFICATION

Current Rating:3.0 Amps/Contact Max.
 Withstand Voltage:1000V AC For 1 Minute
 Contact Resistance:20 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 100V
 Operation Temperature:-55°C~+105°C
 Insulator:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

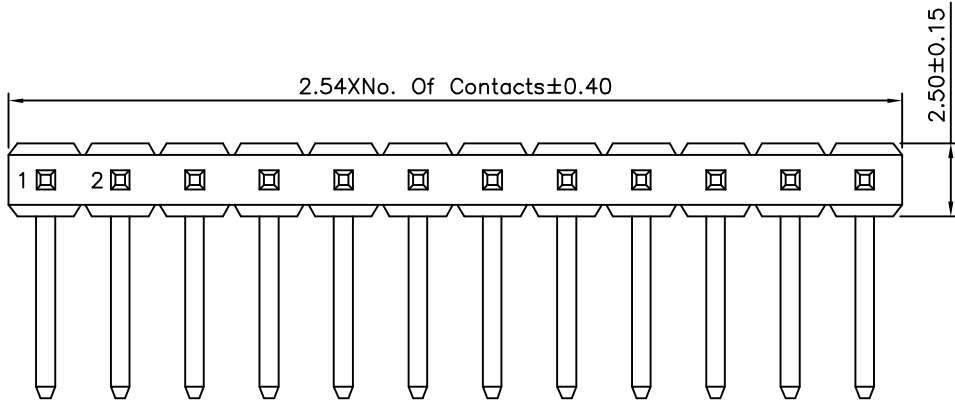

H R 1 X XX - H H
 (1) (2) (3) (4) (5) (6)

- (1) H:2.54mm Pin Header
- (2) R:DIP Right Angle
- (3) 1:Single Row
- (4) XX:No. Of Position/Per Row
- (5) H:Withstand High Temperature Soldering
- (6) H:RoHS Compliant

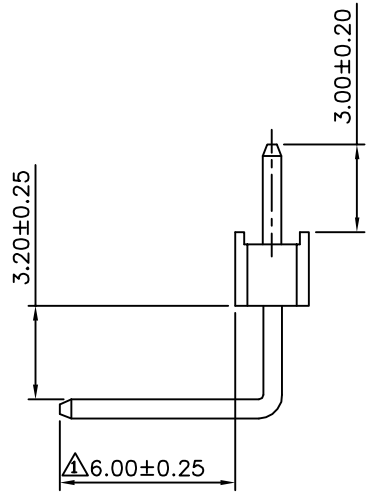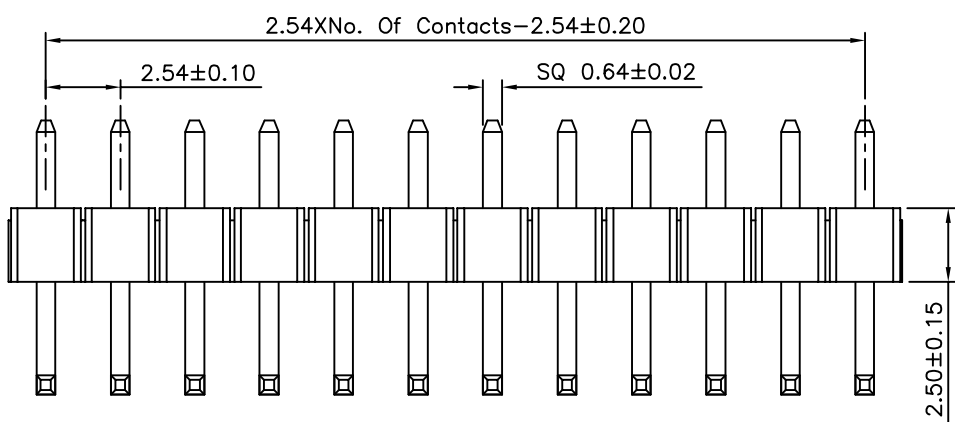

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. HR1XXX-HH		CHECKED BY HZF	
DRAWING No. HR1XXX-HH		DRAWING BY SONG	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X ±0.50
 XX ±0.30
 XXX ±0.20
 .XXX ±0.10
 ANG. ±5°

UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Dim.	HZF	10/12/2013
△	A0	NEW RELEASE	HZF	07/16/2012