

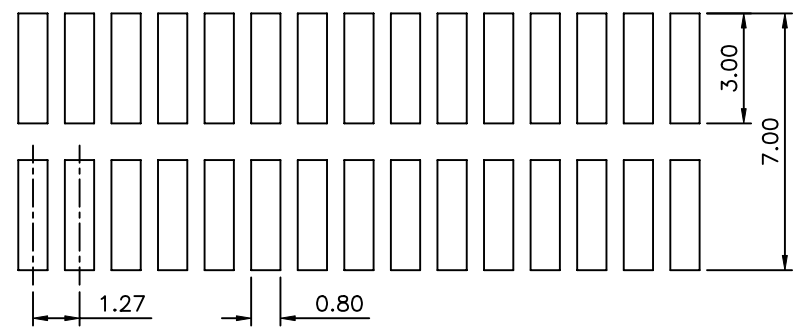



SPECIFICATION

Current Rating:1 Amps/Contact Max.
 Contact Resistance:4 Milliohms/Contact Max.
 Insulation Resistance:1000 Megaohms Min. At 500V
 Operation Voltage:60V AC/DC
 Withstanding Voltage:1000V AC Minute
 Operation Temperature:Gold Plated:-55°C~+125°C
 Soldering Temperature:+260°C,10s Max.
 Pin(Outer Sleeve):Brass,Machined CuZn38Pb2
 Gold Plated Over Nickel
 Insulator:PA46(UL94V-0),Black
 RoHS Compliant

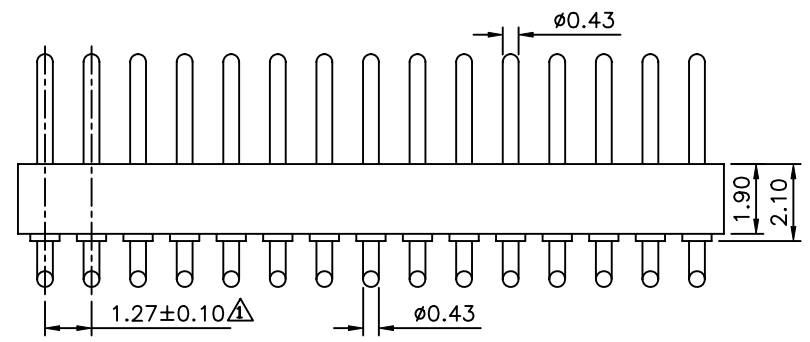

Recommended P.C.B. Layout

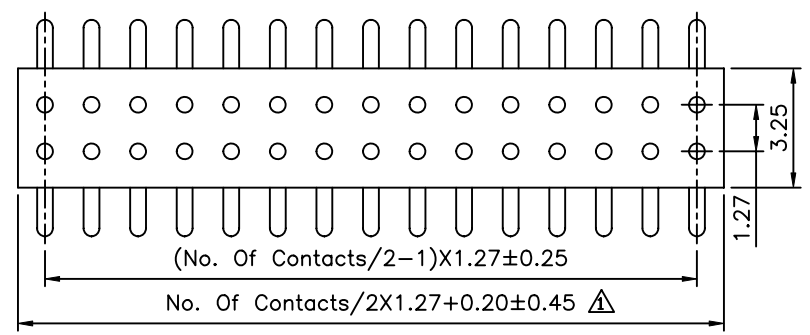

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 X ±0.30 XX ±0.20 XXX ±0.10 ANG. ±5°
PART No. HSPV33-2XXG-H		MEI		
DRAWING No. HSPV33-2XXG-H		CHECKED BY HZF		
SCALE		DRAWING BY WSS		
SCALE	NONE	REV.	A1	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Data	HZF	04/06/2011
△A0		NEW RELEASE	HZF	05/01/2008