

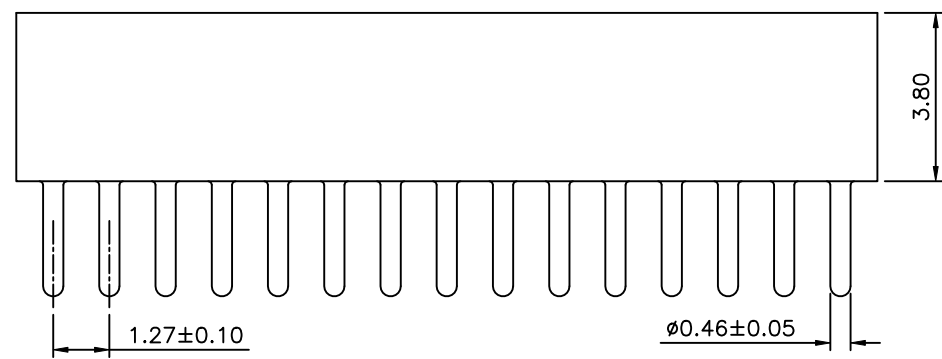


Recommended P.C.B. Layout

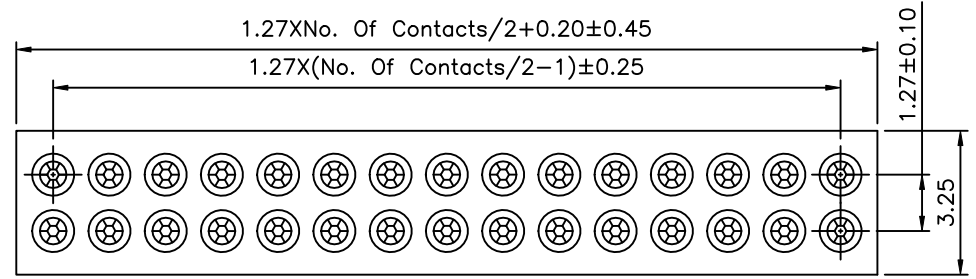

**SPECIFICATION**

Current Rating: 1 Amps/Contact Max.  
 Operating Voltage: 60V AC/DC  
 Withstand Voltage: 1000V AC/Minute  
 Contact Resistance: 4 Milliohms Max./Contact  
 Insulation Resistance: 1000 Megaohms Min. At 500V  
 Operating Temperatures: Gold Plated: -55°C ~ +125°C  
 Tin Plated: -40°C ~ +105°C

Pin (Outer Sleeve): Brass, Tin Plated Over Nickel  
 Clip (Contact 6 Finger): Beryllium Copper, Gold Flash Over Nickel  
 Insulator (Housing): PPS (UL94V-0), Black  
 RoHS Compliant

HSS 2 X XX - H H

- (1) (2) (3) (4) (5)
- (1) HSS: 1.27mm Swiss Round Pin Socket
- (2) 2: Dual Row
- (3) XX: No. Of Position/Per Row
- (4) H: Withstand High Temperature Soldering
- (5) H: RoHS Compliant

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X ±0.50 XX ±0.30 XXX ±0.20 XXXX ±0.10 ANG. ±5°
PART No. HSS2XXX-HH		MEI		
DRAWING No. HSS2XXX-HH		CHECKED BY HZF		
		DRAWING BY CYP		
SCALE	NONE	REV.	A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	01/17/2018