File No.	697IF29806	SHEET	1/1

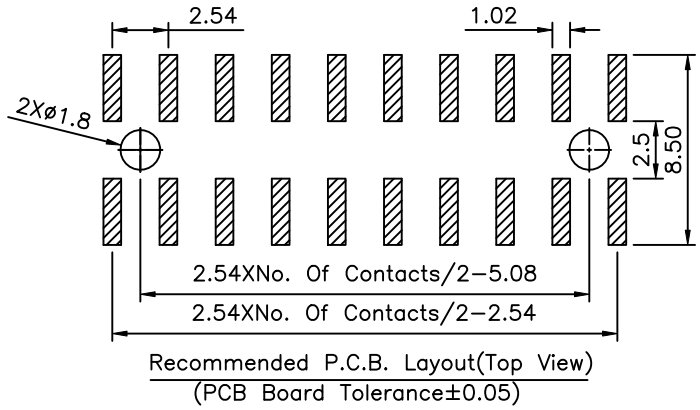

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

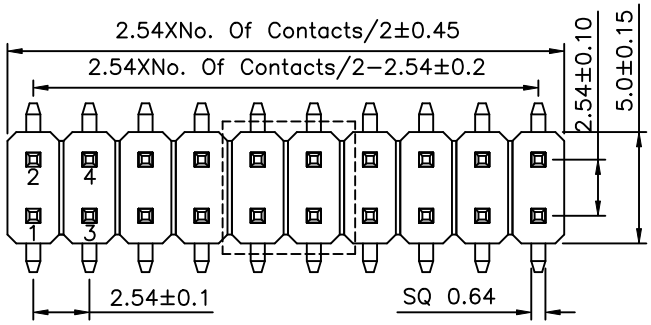

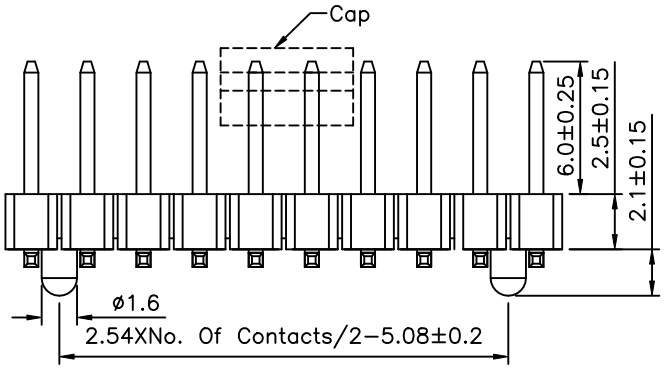

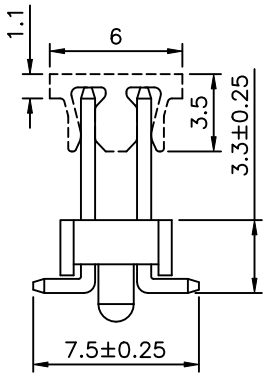

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

H V P 33 − 2 X XX C −RXXX − H
(1)(2)(3)(4) (5) (6) (7) (8) (9)

(1) H:2.54mm Pin Header
(2) V:SMT Straight
(3) P:With Post
(4) 33:SMT Height 3.3mm
(5) 2:Dual Row
(6) XX:No. Of Position/Per Row
(7) C:With Cap
(8) RXXX:Tape & Reel
(9) H:RoHS Compliant

AUK
A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	MEI
PART No. HVP33−2XXXC−RXXX−H		CHECKED BY	HZF
DRAWING No. HVP33−2XXXC−RXXX−H		DRAWING BY	CYP
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.25 X.° ±2°
.X ±0.20 .X° ±1.5°
.XX ±0.15 .XX° ±1°
.XXX ±0.10 .XXX° ±0.5°
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
	A0	NEW RELEASE	HZF	12/29/2017