
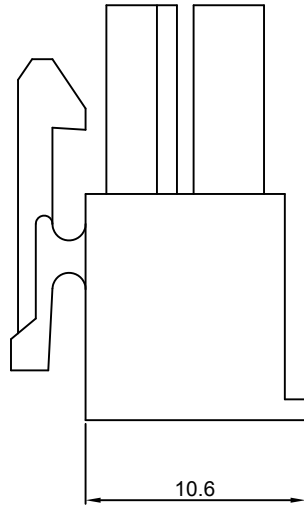
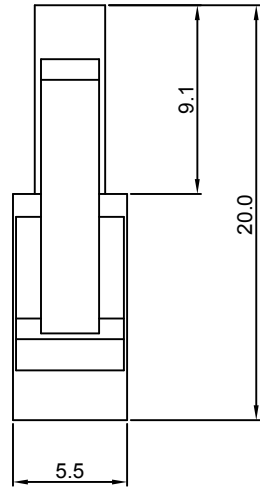


| | |
|------|---|
| Dept | |
| Qty | |
| DC | 1 |
| ED | 1 |
| IE | 1 |
| ISO | 1 |
| PD | 1 |
| R&D | 1 |
| SD | 1 |
| QA | 1 |
| QC | 1 |
| QE | 1 |

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or modification is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.



| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|-------------|---------------|---------|----------|
| A | NEW RELEASE | JLZ 04/23/21' | | |
| | | | | |
| | | | | |

NOTES:
 Specifications:
 1. Contact resistance: 30mΩ Max.
 2. Insulation resistance: 1000MΩ Min.
 3. Dielectric withstanding voltage: 1000V AC(Rms) for 1 minute.
 4. Current rating:7A.
 5. Temperature: -25°C~+85°C.
 Material:
 1. Insulator material: Nylon,Transparent .
 Product number code:
 I - DS1073-02 - S C T O X

No. of contacts
2*1: 2*1Pin
 Housing color
T: Transparent
 Mounting type
C: Crimp type
 Housing type
S: Female

| | | | | | | | | | |
|-------------------|-------|---------------------|-------|--|----|--------|---------------------------------|--|--------|
| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | TITLE | 4.2mm Connector Housing type | | |
| X. | ±0.60 | X. | ±5° | UNITS | mm | SERIES | DS1073-02 SERIES | | |
| .X | ±0.38 | .X | ±3° | 晨翔电子有限公司 CONNFLY CONNELY ELECTRONIC CO. LTD | | | | | |
| .XX | ±0.25 | .XX | ±2° | | | | | | |
| DRAWING TYPE | | CUSTOMER | | | | | | | |
| SCALE | | 1:1 | SHEET | | | | | | 1 OF 1 |
| DRAWING NO. | | C-DS1073-02-XXXXX-A | | | | | | | |