



LC65W550-700S

Constant Current Driver

Model: LC65W550-700S



Model	Output Current	Input Current	Input Power	Output Power Range	PF	Efficiency (typical)	Output Voltage	No load Voltage
LC65W550-700S	550mA	0.35A	75W	19.8-64.9W	0.95	90%	36-118V	160V
	600mA			21.6-64.8W			36-108V	
	650mA			23.4-65.0W			36-100V	
	700mA			25.2-65.1W			36-93V	

*** Test result @230V, 50Hz, Full Load.**

1. Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Current
	Output Features	Isolation
	IP Grade	IP20
	Insulation Class	Class I
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	198-264VAC
	Frequency	50-60Hz
	Input Current	≤0.35A (230VAC, full load)
	Input Power	≤75W (230VAC, full load)
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤15% (230VAC, full load)
	No-load Power Consumption	≤0.5W @230VAC
	Inrush Current	≤35A/400μs (230VAC, full load)
	Input Over Voltage protection	When input voltage over 330-390VAC, output will be cut off, and can withstand 2 hrs. That is auto recovery, when input voltage come back normal input voltage range.
Output	Output Voltage Range	36-93VDC@700mA
		36-100VDC@650mA
		36-108VDC@600mA
		36-118VDC@550mA
	No Load Voltage	160VDC Max.
	Output Current	550mA-700mA
	Max. Output Power	65.1W
	Efficiency	≥90% (230VAC, full load)
	Current Ripple(< 120 Hz)	±5% (Imax-Imin)/(Imax+Imin)

	PstLM	≤1
	SVM	≤0.4
	Current Accuracy	±5%
	Line Regulation	±5%
	Load Regulation	±5%
	Started Delay Time	≤0.5S (230VAC, full load)
Protection	Short Circuit Protection	Auto Recovery
	Overload Protection	Auto Recovery
	Insulation voltage	3000V 5mA 60S between P-S
	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P <0.7mA
Environment	Ta/Operation Temperature	-20....+50℃
	Ts/Storage Temperature	-25....+85℃
	Tc/Enclosure Temperature	85℃
	Humidity	10%....90%RH
	Atmospheric pressure	86-108KPa
Construction	Connection Method	Push-in Terminal
	Installation	Built-in
	PRI Wire preparation	0.5-1.5 [□] mm
	SEC Wire preparation	0.5-1.5 [□] mm
	Dimension	L195*W30*H21mm (L*W*H)
Standards	Certification	CE、EAC
	Safety Standards	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN IEC 62384:2020 EN 62493:2015 AS61347.2.13:2018 AS/NZS61347.1:2016 Inc A1 BS EN 61347-1:2015/A1:2021 BS EN 61347-2-13:2014/A1:2017 BS EN 62493:2015 BS EN IEC 62384:2020
	EMC Standards	EN IEC 55015:2019 EN IEC 55015:2019/A11:2020 EN IEC 61000-3-2:2019/A1:2021 EN 61000-3-3:2013/A2:2021 EN 61547:2009
	Performance	EN62384:2020
	Surge	L-N:1KV; L/N-PE:2KV;
	RoHS	complied to 2011/65/EU
	REACH	EU Regulation (EC) No 1907/2006
Others	Life Time	50000h @Ta=50℃
	Warranty	5years ,F.R. < 10000ppm
	Noise	≤ 20dB @Background noise ≤15dB ,Interval≥20cm
Remark: 1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25℃ ambient temperature. 2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.		

2. Output Current Setting

Output Current	PIN1	PIN2
550mA	OFF	OFF
600mA	ON	OFF
650mA	OFF	ON
700mA	ON	ON

3. Connected quantities of different current Breaker

TYPE	Connected quantities of different current Breaker						Input Voltage	Inrush Current	Time
	current (A)	10	13	16	20	25			
	Installation wire diameter	1.5mm ²	2.5mm ²	2.5mm ²	4mm ²	4mm ²			
TYPE B	17	22	27	34	43		@230VAC	35	400μs
TYPE C	27	36	44	55	69				
TYPE D	44	57	70	88	110				

4. Label

☐ N
☐ L
☐

KGP
 KGP Electronics GmbH
 Hueckstraße 19
 DE-58511 Lüdenscheld

LED Driver
 LC65W550-700S
 Constant Current Type

PIN1	PIN2	I _{rated} (mA)	P _{rated} (W)	U _{rated} (V)	U _N / f _N	I _N (A)	t _a [°C]	λ
OFF	OFF	550	65.1	36-118	220-240VAC 50/60Hz	0.35	-20...+50	0.95
ON	OFF	600	65.1	36-108				
OFF	ON	650	65.1	36-100				
ON	ON	700	65.1	36-93				

● t_c=85°C


wire preparation
 wire 0.5-1.5 mm


EAC CE

Output


U_{out}:Max.160VDC For LED modules only Made in China

5. Lifetime curve

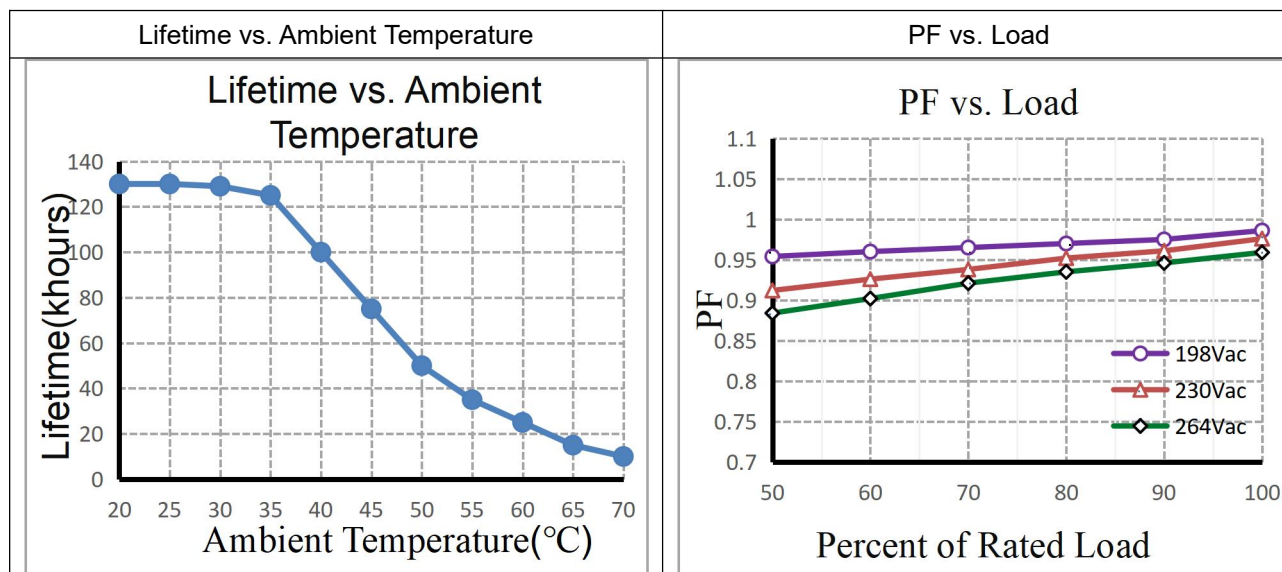

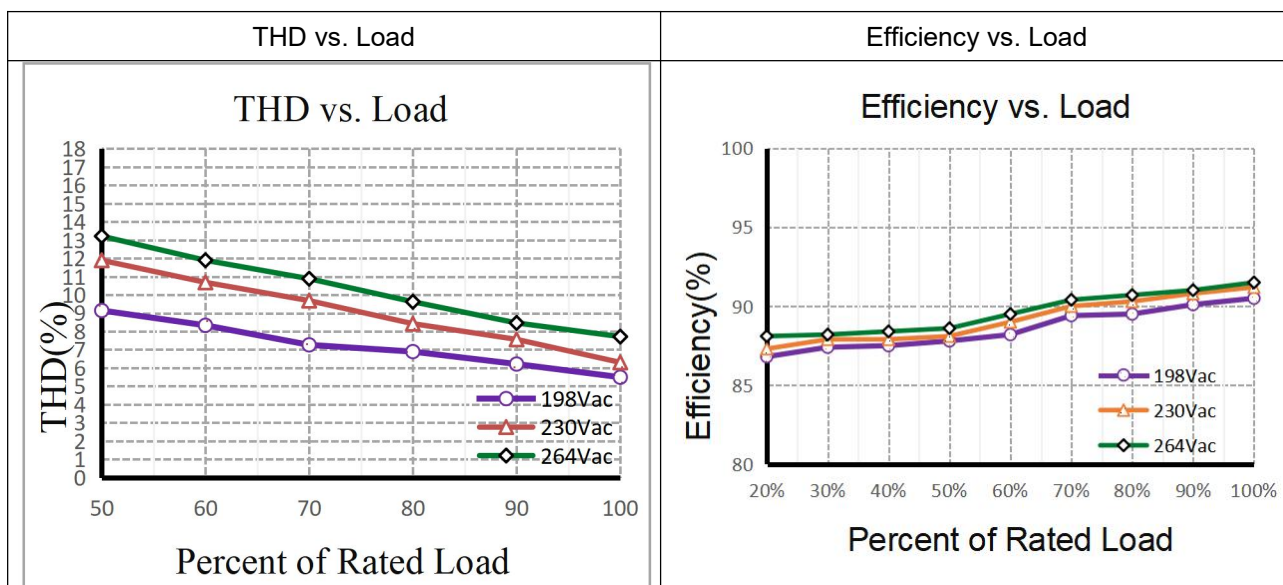

6. Dimension (Unit: mm)

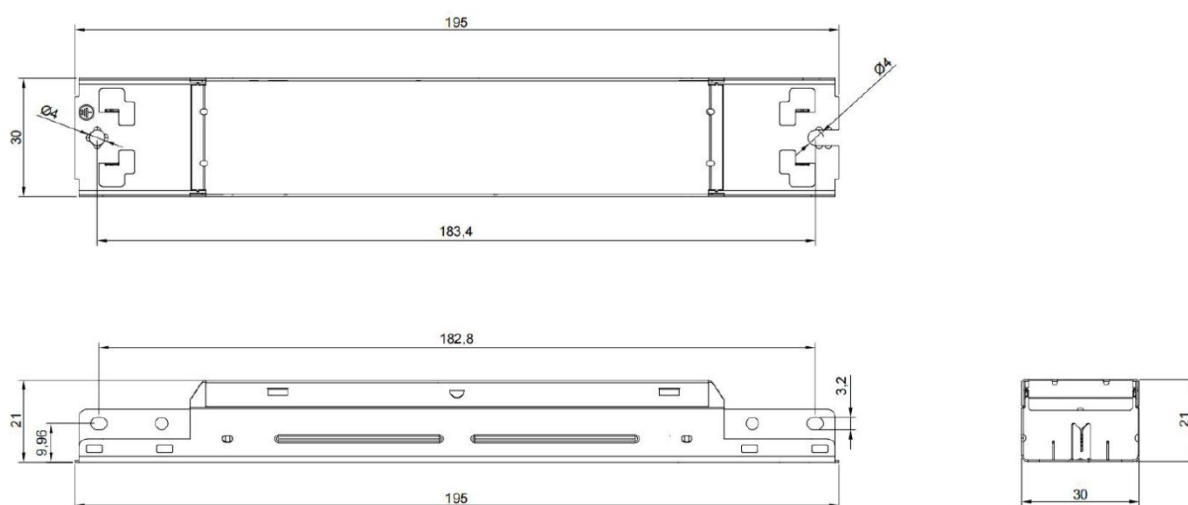

7. Wiring Diagram



8. Packing information

Packing way	Carton L*W*H(mm)	Pcs/Carton	Net weight/ Pcs(kg)	Net weight/ Carton(kg)	Gross weight / Carton(kg)
Industrial	375*248*220	85	0.131	11.14	12.35

9. Wiring instructions

- All connections must be kept as short as possible to ensure good EMI behaviour
- Mains leads should be kept apart from LED Driver and other leads (ideally 5 – 10 cm distance)
- Advice the maximum length of output wires is 3 m
- Secondary switching is not permitted (Except for constant voltage)
- Incorrect wiring can damage LED modules.
- The wiring must be protected against short circuits to earth (sharp edged metals parts, metal cable clips, louver, etc.)
- Hot plug-in is not supported due to residual output voltage of > 0 V up to mains voltage. Danger to life.
- When connecting an LED load, restart the device to activate the LED output.
- This can be done via mains reset or via interface (DALI, DSI, switch DIM).

10. Replace LED module

- Mains off
- Remove LED module
- Wait for 30 seconds
- Connect LED module again
- Hot plug-in or secondary switching of LEDs is not permitted and may cause a very high current to the LEDs

11. REVISION HISTORY

DATE	VER	REMARK
2025-5-8	V1.0	Initial release.