



△△ SPECIFICATION


Voltage Rating:250V AC
Current Rating:7A
Dielectric Withstanding Voltage:1500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
△ Insulator:PA66,Nature
Contact:Brass,Tin Plated
RoHS Compliant

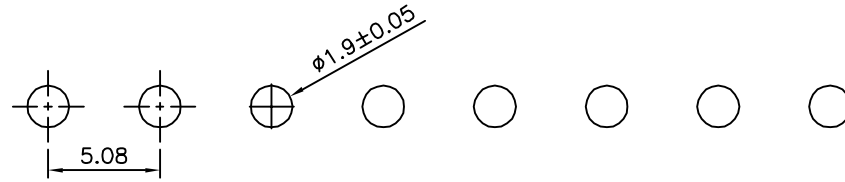


△ Recommended P.C.B. Layout

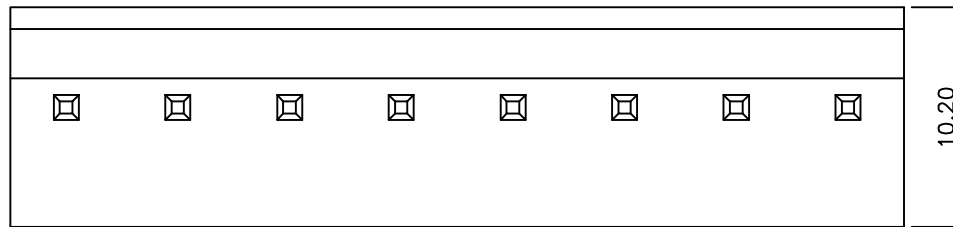

△

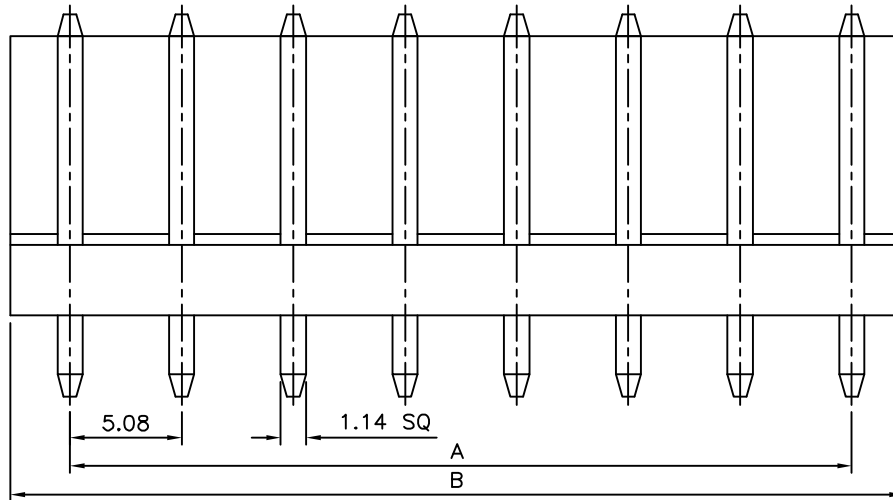

△

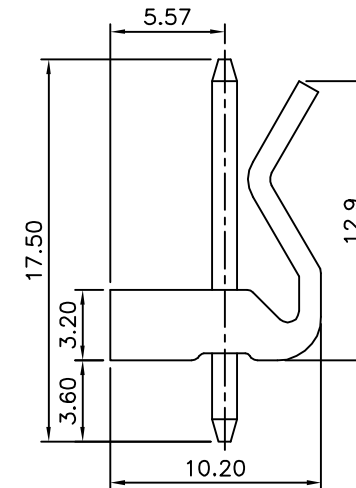

△

△△ LK XX D - XX - H
(1) (2) (3) (4) (5)

- (1) LK:5.08mm LK Series
(2) XX:No. Of Position
(3) D:DIP Straight
(4) XX:Flame Retardant
Blank:UL94V-2
V0:UL94V-0
(5) H:RoHS Compliant

△ Pin	A	B
2	5.08	10.22
3	10.16	15.30
4	15.24	20.38
5	20.32	25.46
6	25.40	30.54
7	30.48	35.62
8	35.56	40.70
9	40.64	45.78
10	45.72	50.86
12	55.88	60.96

CATEGORY	APPROVED BY MEI
PART No. △ LKXXD-XX-H	CHECKED BY HZF
DRAWING No. LKXXD-XX-H	DRAWING BY SONG
SCALE NONE	REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
△ .X ±0.5
.XX ±0.3
ANG.

△ A4	Modify P/N:LKXXD-H ---> LKXXD-XX-H Add LKXXD-V0-H	HZF	12/02/2013
△ A3	Modify Data	HZF	04/27/2010
△ A2	Add Specification	MEI	03/03/2003
△ A1	5.08mm Of Contacts+0.06 - 5.08mm Of Contacts+0.6	MEI	03/03/2003
△ A0	NEW RELEASE		
NO. REV.	REVISIONS	CHK	DATE