

## MOUNTING RECEPTACLE


MODEL: LT615

### Product Feature:

LT615 Type Receptacle, a mounting receptacle meets ANSI C136.10 and UL773 standard. With heat shrink tubing and wire connector to achieve the best waterproof and insulation performance.



TECHNICAL SPECIFICATION	
Standard	ANSI C136.10 & UL773
UL File No.	E492075
Rated Volts	480V (0-480V)
Frequency	50-60 Hz
Rated Load	15A / 1000W / 1800VA
Operating Temperature	-40°C to +70°C
Related Humidity	99%
Insulation	3000V / 50/60Hz / 1min
Housing	Bakelite
Protective Cover	PA66, UL 94V-0
Cable	UL1015
Wire Connector	PP
Heat-shrink Tubing	UL / 600V / 125 °C

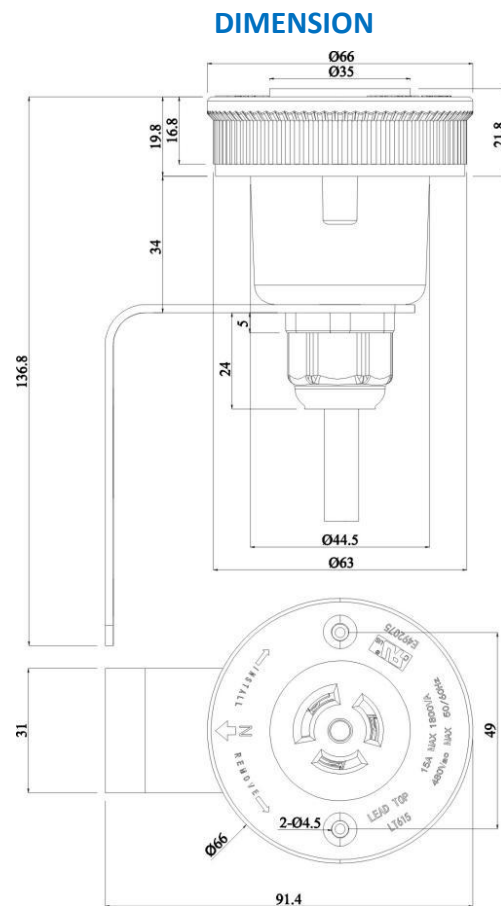

PRODUCT SELECTION INFORMATION			
MODEL	CABLE SIZE	CABLE	METAL BRACKET
LT615	W14: UL1015 14AWG	Lzz	MB: Metal Bracket
	W16: UL1015 16AWG	(zz: 01-99cm)	None