


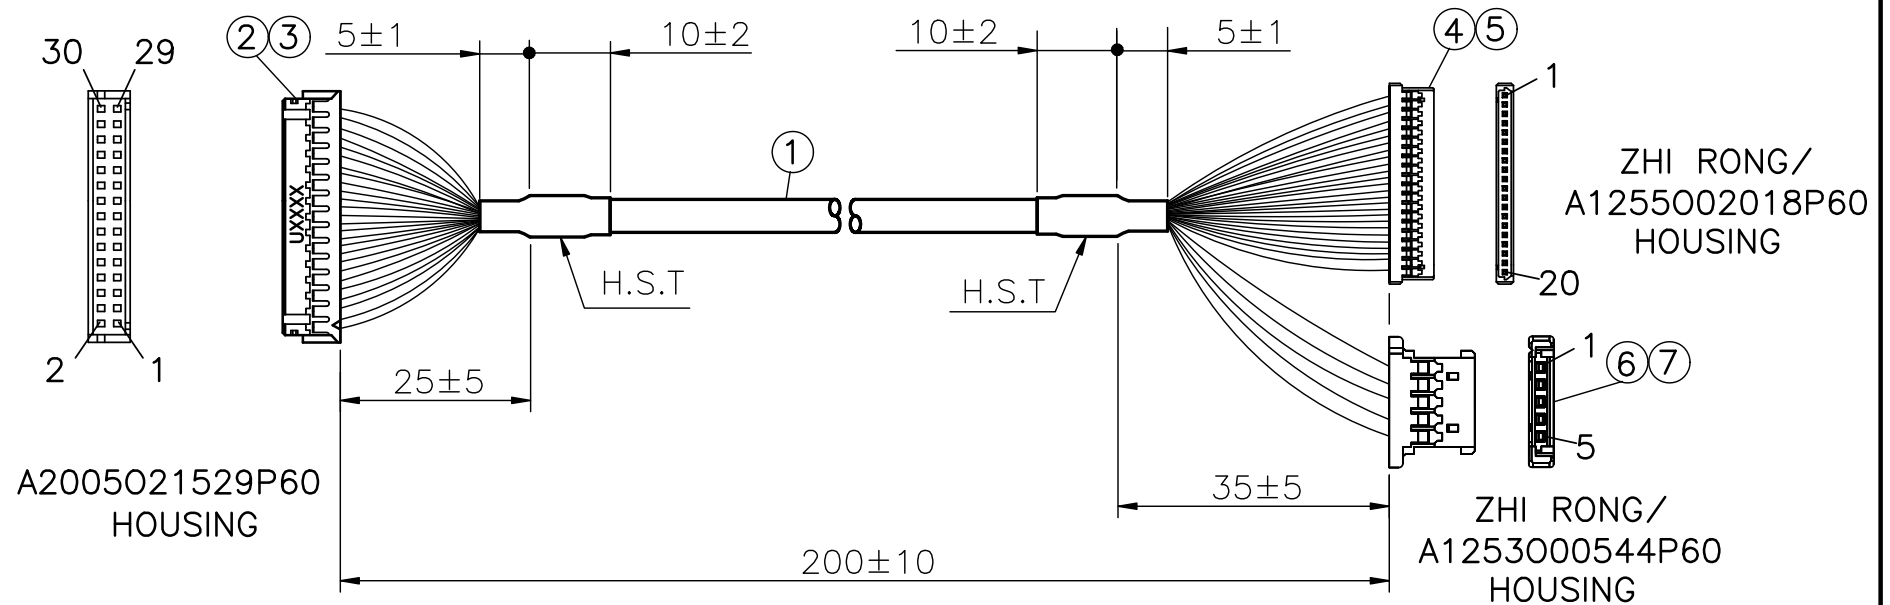

NOTE:

- 1.TEST CONDITION:(a).CABLE MUST TO TEST OPEN,SHORT & MISWIRE,100% TEST.
- (b).INSULATOR RESISTANCE:DC 300V 0.01sec,2Mohm MIN.
- (c).CONTACT RESISTANCE:0.9ohm MAX.
- (d).HI-POT TEST:AC 300V 10mA 1sec.



2.PACKING:EACH 10pcs CABLE IN AIR BUBBLE POLYBAG,WITH CLEAR TAPE FIXED.

	mm			
TOLERANCES UNLESS OTHERWISE SPECIFIED .X± .XXX± .XX± ANGLES		DESCRIPTION PANEL LINK CABLE		
DRAFT Grand		PART NUMBER ELTECH LVDS CABLE DLC TOPWAY		
CHECK Mag		SCALE	REV Sø	SHEET 1/2
APPROVAL Mag 12/09/'13				


PIN OUT

ZHI RONG
A2005021529P60
HOUSING

ZHI RONG
A1255002018P60
HOUSING

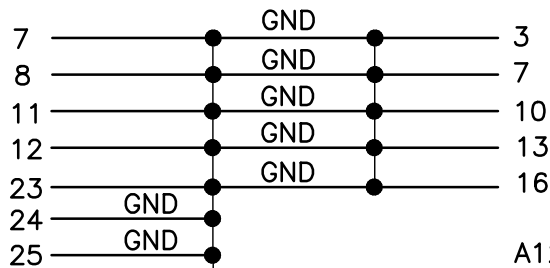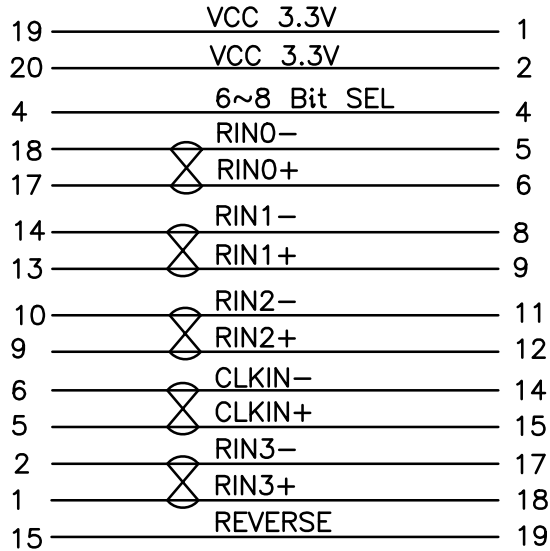

ZHI RONG/
A1253000544P60
HOUSING

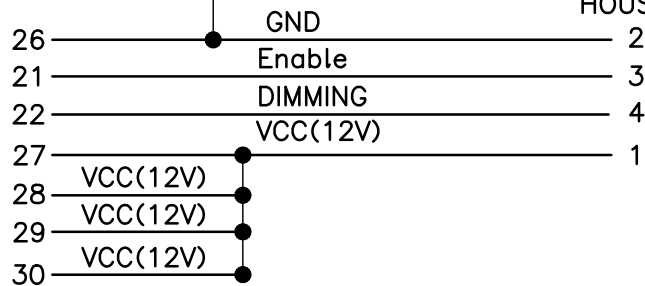

DRAFT		SCALE		TOLERANCES		Unixtar Technology, Inc.	
Grand				.X ± .XXX ±		REV. SØ	
CHECK				.XX ± ANGLES		SHEET	
Mag				DESCRIPTION		PART NUMBER	
APPROVAL				PIN OUT		ELTECH	
Mag 12/09/'13						LVDS CABLE DLC TOPWAY	
						2 / 2	