File No. 189 ③ SHEET 1/1

③ SPECIFICATION

Contacts:Phosphor Bronze
Wire Size:22~28 AWG Crimp Contacts
Q'ty:2500 PCS/Reel
RoHS Compliant

③ M34 (1) F1G (2) XX (3) – H (4)

(1) M34:1.905mm V.35 34 Pin Crimp
(2) F1G:Female Terminal 1 Latch
(3) XX:Contact Finish
Blank:Gold Flash On Contact Area,Tin Plated On Solder Tail,Over Nickel
05:Gold Plated 5u" On Contact Area,Tin Plated On Solder Tail,Over Nickel
15:Gold Plated 15u" On Contact Area,Tin Plated On Solder Tail,Over Nickel
30:Gold Plated 30u" On Contact Area,Tin Plated On Solder Tail,Over Nickel
(4) H:RoHS Compliant

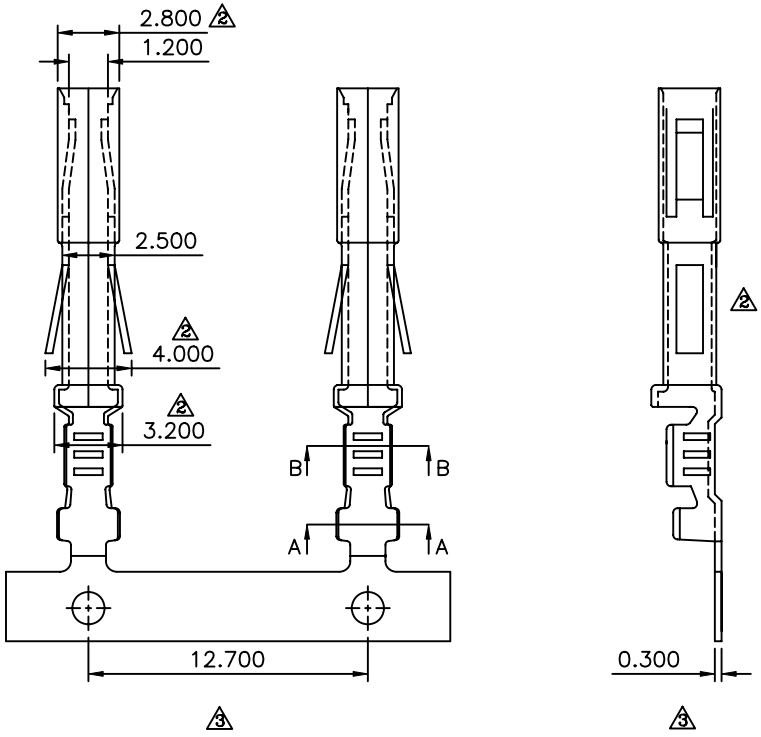



Section A–A



Section B–B

AUK A MEMBER OF AUK GROUP 太聯事業股份有限公司 AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	EMILY
PART No. ①	M34F1GXX-H	CHECKED BY	HZF
DRAWING No.	M34F1GXX-H	DRAWING BY	WZL
SCALE	NONE	REV.	A3

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
③ .XX ±0.1
.XXX ±0.1
ANG.
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
③	A3	Modify Drawing	HZF	02/21/2011
②	A2	Modify Drawing	HZF	09/23/2008
①	A1	Modify P/N:	HZF	09/16/2008
⓪	A0	NEW RELEASE	HZF	11/17/2007