
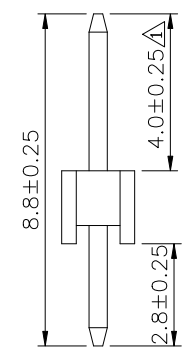
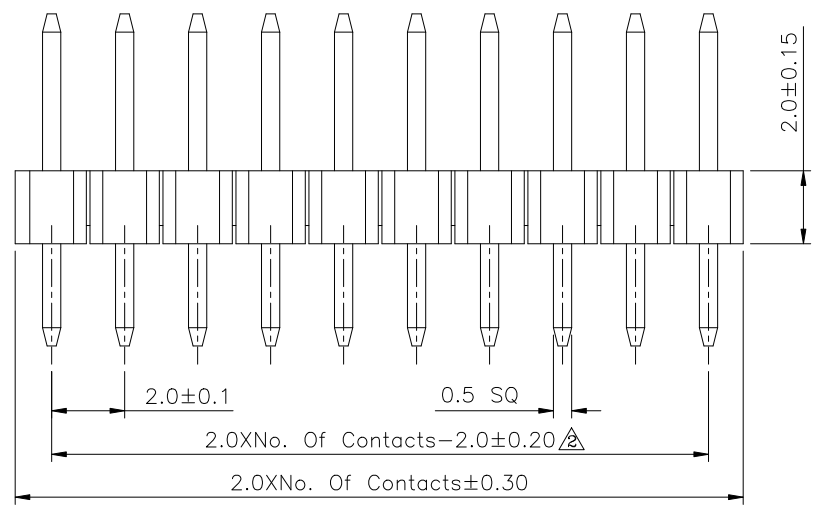


Recommended P.C.Board Layout(Top View)
(PCB Board Tolerance±0.05)

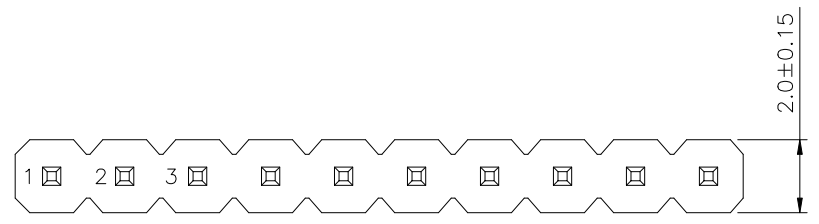

SPECIFICATION
 Current Rating:1.5 Amps
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

\triangle M D 1 X XX - H H
 (1) (2) (3) (4) (5) (6)

- (1) M:2.0mm Pin Header
- (2) D:DIP Straight
- (3) 1:Single Row
- (4) XX:No. Of Position/Per Row
- (5) H:Withstand High Temperature Soldering
- (6) H:RoHS Compliant

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE \triangle					
		MEI		X. ±0.25 X.* ±2*					
PART No.		CHECKED BY		.X ±0.20 .X.* ±1.5*		\triangle A2	Modify Tol.	HZF	05/31/2016
MD1XXX-HH		HZF		.XX ±0.15 .XX.* ±1*		\triangle A1	Modify Data	HZF	01/07/2014
DRAWING No.		DRAWING BY		.XXX ±0.10 .XXX.* ±0.5*		\triangle A0	NEW RELEASE	HZF	01/21/2011
MD1XXX-HH		CYP		UNIT					
SCALE	NONE	REV.	A2	mm					
						NO.REV.	REVISIONS	CHK	DATE