
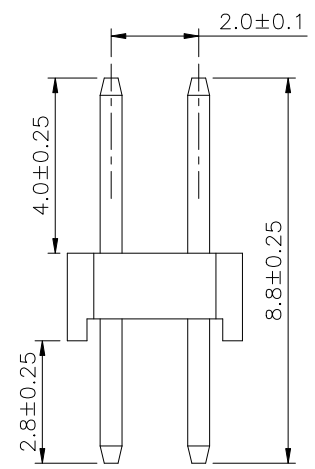
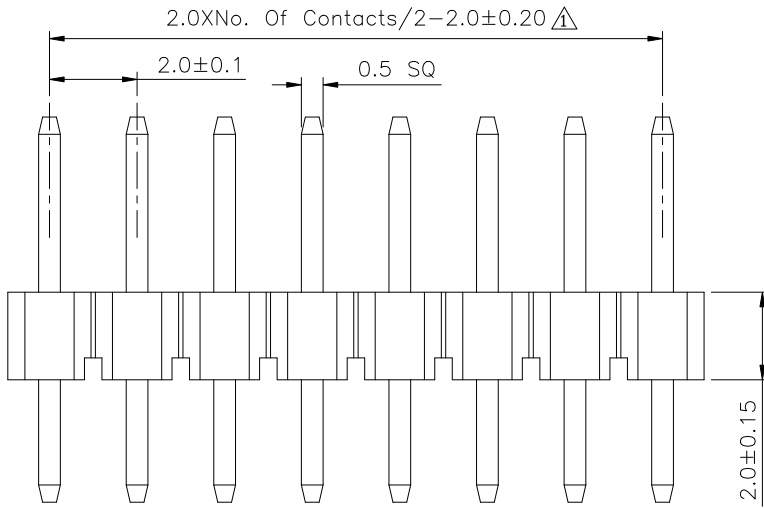


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

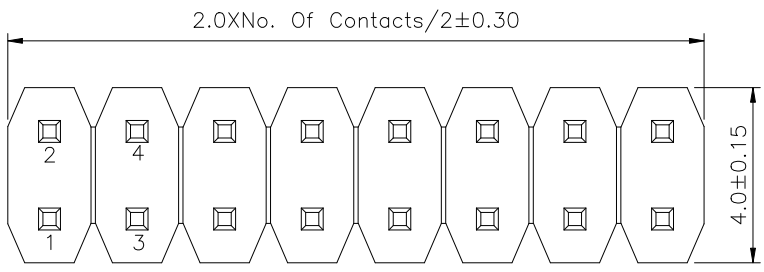

SPECIFICATION

Current Rating:1.5 Amps
Withstanding Voltage:500V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

M D 2 X XX - H H
(1) (2) (3) (4) (5) (6)

- (1) M:2.0mm Pin Header
- (2) D:DIP Straight
- (3) 2: Dual Row
- (4) XX:No. Of Position/Per Row
- (5) H:Withstand High Temperature Soldering
- (6) H:RoHS Compliant



CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
PART No. MD2XXX-HH		MEI		X. ±0.25 X.* ±2*	
DRAWING No. MD2XXX-HH		CHECKED BY HZF		.X ±0.20 .X* ±1.5*	
SCALE NONE		DRAWING BY CYP		.XX ±0.15 .XX* ±1*	
REV. A1		UNIT mm		.XXX ±0.10 .XXX* ±0.5*	

NO.	REV.	REVISIONS	CHK	DATE
△A1		Modify Tol.	HZF	05/31/2016
△A0		NEW RELEASE	HZF	07/06/2013