
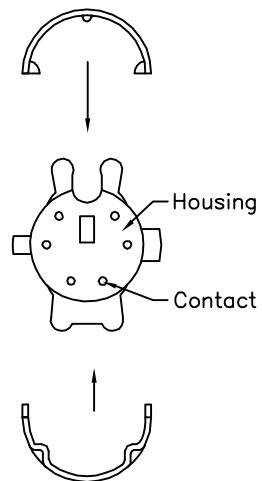
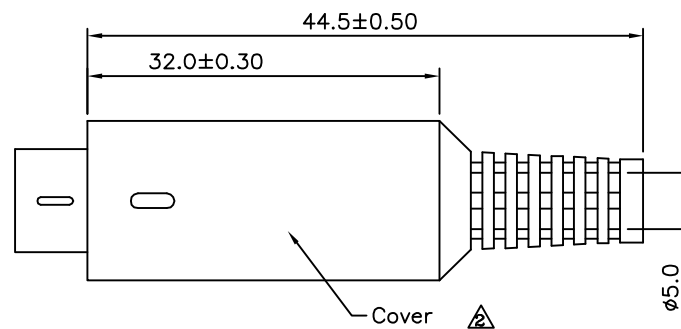
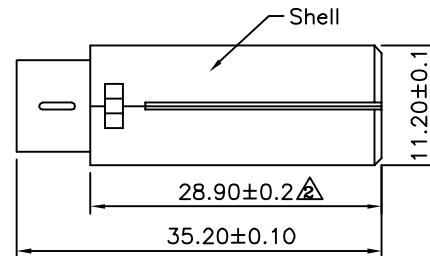


**△ SPECIFICATION**

Rating: 100V AC 1A Max.  
 Insulation Resistance: 50 Megaohms Min. At 500V DC  
 Dielectric Strength: 500V AC/1 Minute  
 Insertion Force: 4.5kg Max.  
 Withdrawal Force: 0.9kg~3kg  
 Cover: EVA+PE-LL  
 Shell: ABS  
 Metal Shield: Brass, Nickel Plated  
 △ Housing: PA6+FB  
 Contact: Brass, Silver Plated  
 RoHS Compliant

**△ MDA XX P - H**  
 (1) (2) (3) (4)

(1) MDA: Mini Din Solder Wire Assembly Type  
 (2) XX: No. Of Position  
 (3) P: Male  
 (4) H: RoHS Compliant

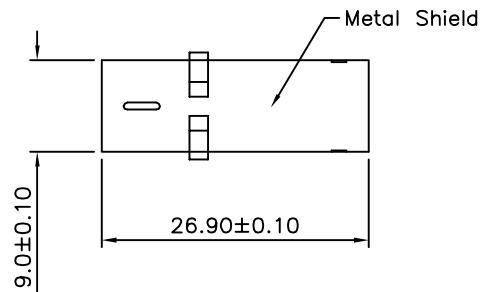

3P	4P	5P	6P	7P	8P

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.20 △ .XX ±0.10 ANG.
PART No. MDAXXP-H		EMILY		
DRAWING No. MDAXXP-H		CHECKED BY HZF		
		DRAWING BY GAO		
SCALE	NONE	REV.	B2	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
△ B2		Modify Data	HZF	08/23/2013
△ B1		Add UL94V-0	HZF	11/23/2010
△ B0		NEW RELEASE	EMILY	09/17/2008