File No.	060	SHEET	1/1

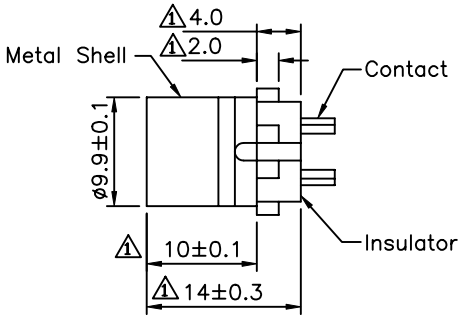

1 SPECIFICATION

Rating:100V AC 1A Max. Or 12V DC 2A Max.
Dielectric Strength:250V AC/1 Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:50 Megaohms Min. At 250V DC
Operation Temperature:−20°C~+105°C
Insertion Force:4.5Kg Max.
Withdrawal Force:0.9Kg~3Kg.
Boot:PE+2L
Middle Hood:PA−757
Metal Shell:Copper,Nickel Plated
Insulator:PA6+G.F.
Pin Contact:Brass,Silver Plated
RoHS Compliant

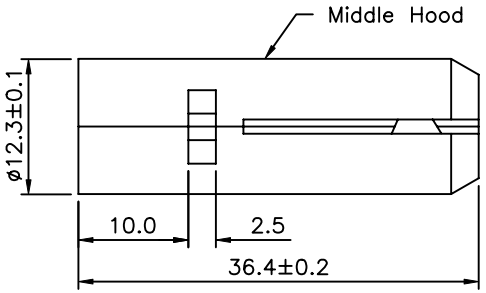

1

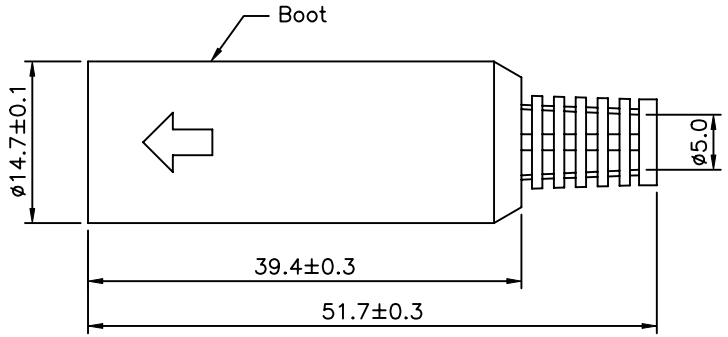

1

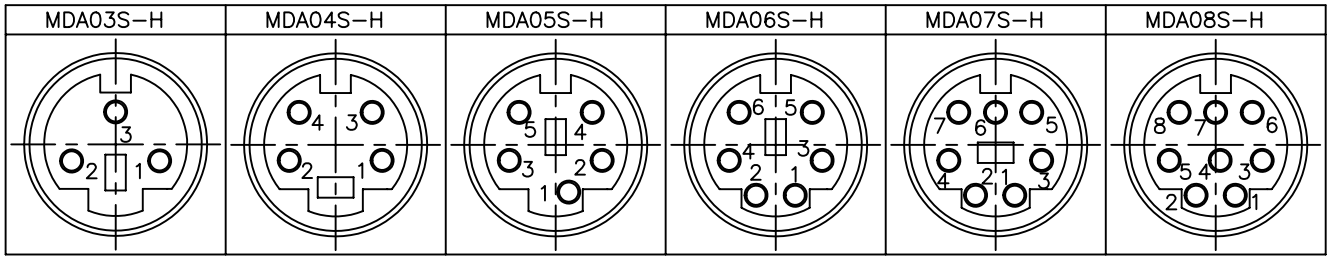

1

A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	MEI
PART No.	MDAXXS−H	CHECKED BY	HZF
DRAWING No.	MDAXXS−H	DRAWING BY	QQJ
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
1 .X ±0.1
.XX ±0.05
UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
1	A1	Modify Data	HZF	03/18/2010
0	A0	NEW RELEASE	HZF	