
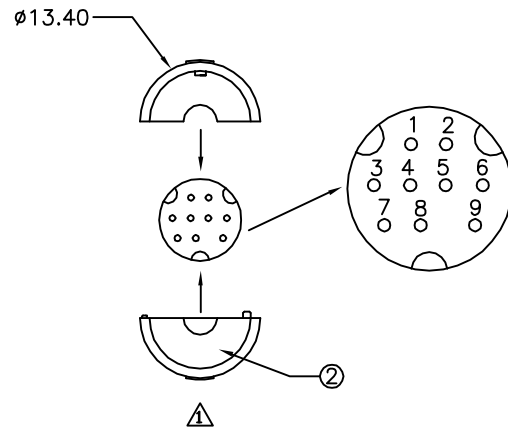


△△ SPECIFICATION

Rating:100V AC 1A Max. Or 12V DC 2A Max.
 Dielectric Strength:250V AC/Minute
 Contact Resistance:30 Milliohms Max.
 Insulation Resistance:50 Megaohms Min. At 250V DC
 Operation Temperature:-5°C~+105°C
 Insertion Force:4.5Kg Max.
 Withdrawal Force:0.9Kg~3Kg
 ① Housing:PA66+G.F.
 ② Shell:ABS
 ③ Cover:PE+2L
 ④ Contact:Brass,Silver Plated
 ⑤ Metal Shield:Brass,Nickel Plated
 RoHS Compliant

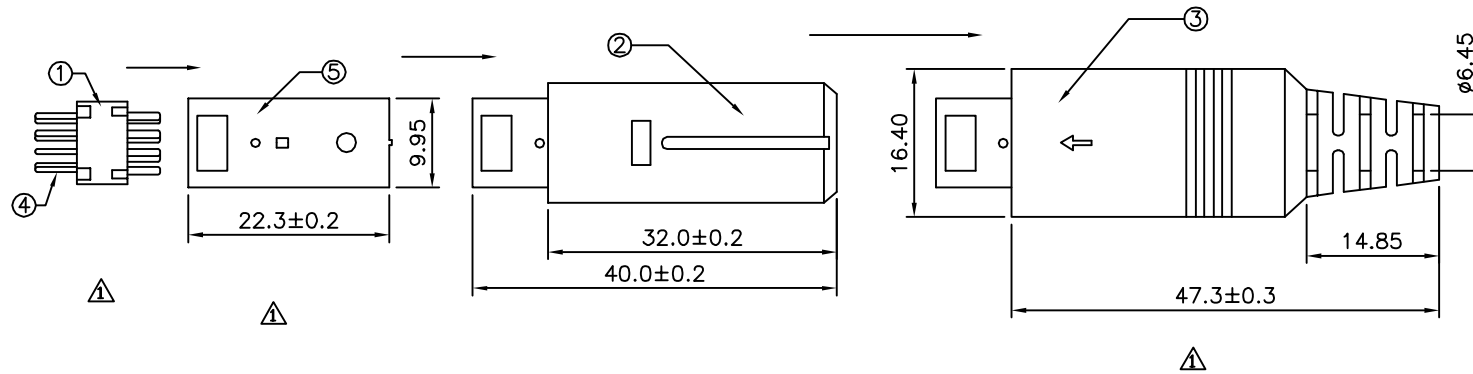

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ .X ±0.10 .XX ±0.05 ANG.
PART No. MDA09P-H		MEI		
DRAWING No. MDA09P-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY GAO		
REV.	A2	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△A2		Modify Data	HZF	08/27/2012
△A1		Modify Data	HZF	05/12/2010
△A0		NEW RELEASE	HZF	