

SPECIFICATION
 Current Rating:7A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-25°C~+85°C
 Material:PA66
 RoHS Compliant

MF 1 X XX P H - XX - XX - H
 (1) (2) (3) (4) (5) (6) (7) (8)

- (1) MF:4.2mm Mini Fit
- (2) 1:Single Row
- (3) XX:No. Of Position
- (4) P:Male
- (5) H:Housing
- (6) XX:Flame Retardant
Blank:UL94V-2
VO:UL94V-0
- (7) XX:Insulator Color
Blank:Nature
WH:White
- (8) H:RoHS Compliant

Pin	A	B
02	4.20	9.80
03	8.40	14.00
04	12.60	18.20
05	16.80	22.40
06	21.00	26.60


AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MF1XXXPH-XX-XX-H		CHECKED BY HZF	
DRAWING No. MF1XXXPH-XX-XX-H		DRAWING BY SONG	
SCALE	NONE	REV.	A0


UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.015

UNIT mm


NO.	REV.	DESCRIPTION	CHK	DATE
△A0		NEW RELEASE	HZF	08/03/2011
		REVISIONS		

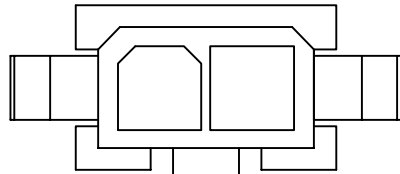


2P

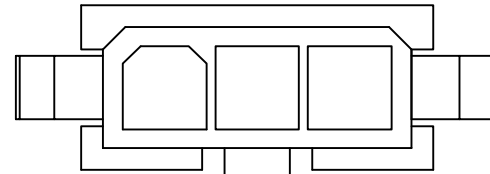


3P

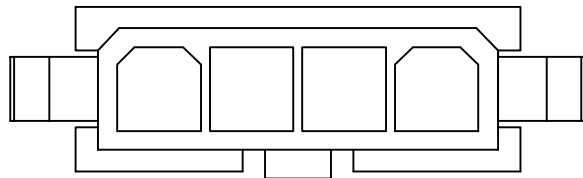

4P

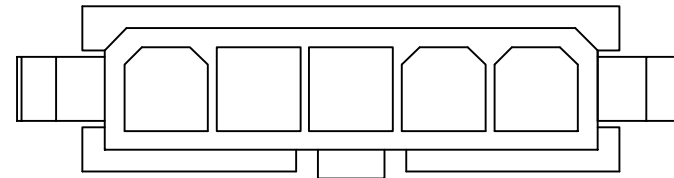

5P

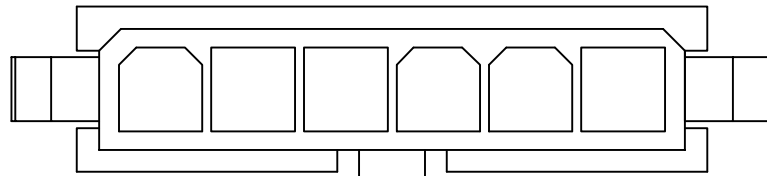

6P

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MF1XXXPH-XX-XX-H		CHECKED BY HZF	
DRAWING No. MF1XXXPH-XX-XX-H		DRAWING BY SONG	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT	mm	NO. REV.		REVISIONS		CHK	DATE
		A0	NEW RELEASE			HZF	08/03/2011