


SPECIFICATION





Current Rating:7A AC,DC
Voltage Rating:600V AC,DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:10 Milliohms Max.
Operation Temperature:-25°C~+85°C
Insulator:PA66
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

MF 1 X XX P D - XX - H
(1)(2) (3)(4) (5) (6) (7)


- (1) MF:4.2mm Mini-Fit Series
- (2) 1:Single Row
- (3) XX:No. Of Position
- (4) P:Male
- (5) D:DIP Straight
- (6) XX:Flame Retardant
Blank:UL94V-2,Nature Color
V0:UL94V-0,White Color
- (7) H:RoHS Compliant

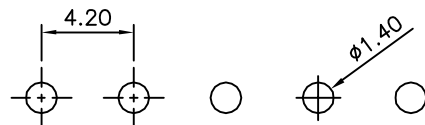


Recommended P.C.B. Layout

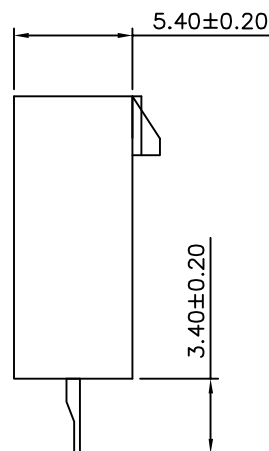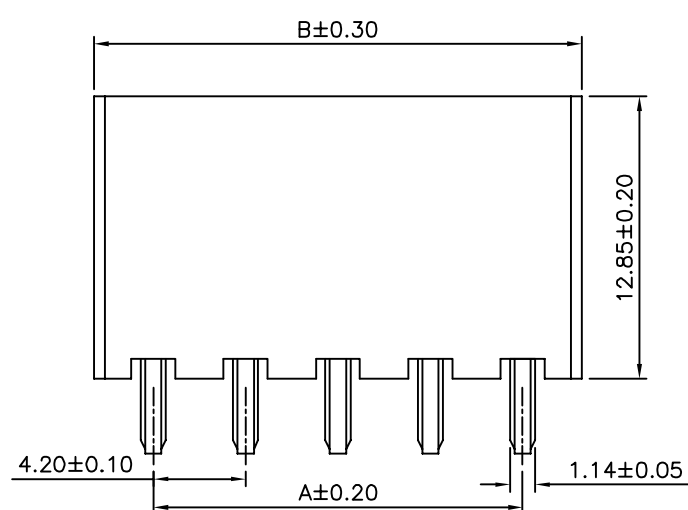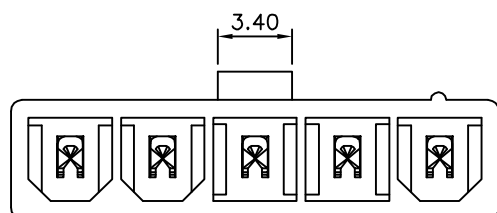


2P




3P

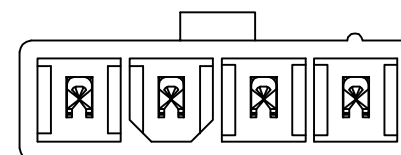

4P

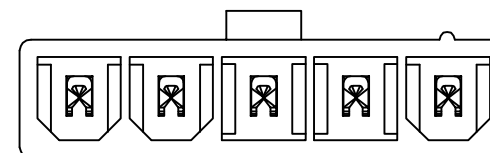

5P

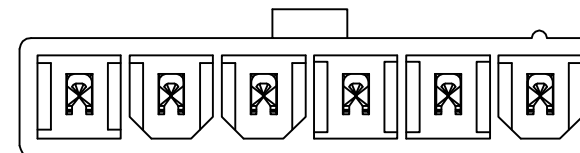

6P

Pin	A	B
02	4.20	9.60
03	8.40	13.80
04	12.60	18.00
05	16.80	22.20
06	21.00	26.40

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MF1XXXPd-XX-H		CHECKED BY HZF	
DRAWING No. MF1XXXPd-XX-H		DRAWING BY CYP	
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.	±0.30
.X	±0.25
.XX	±0.20
.XXX	±0.015
UNIT	mm

NO.	REV.	NEW RELEASE	HZF	08/03/2014
		REVISIONS	CHK	DATE