
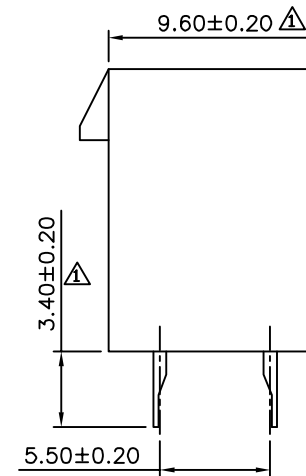
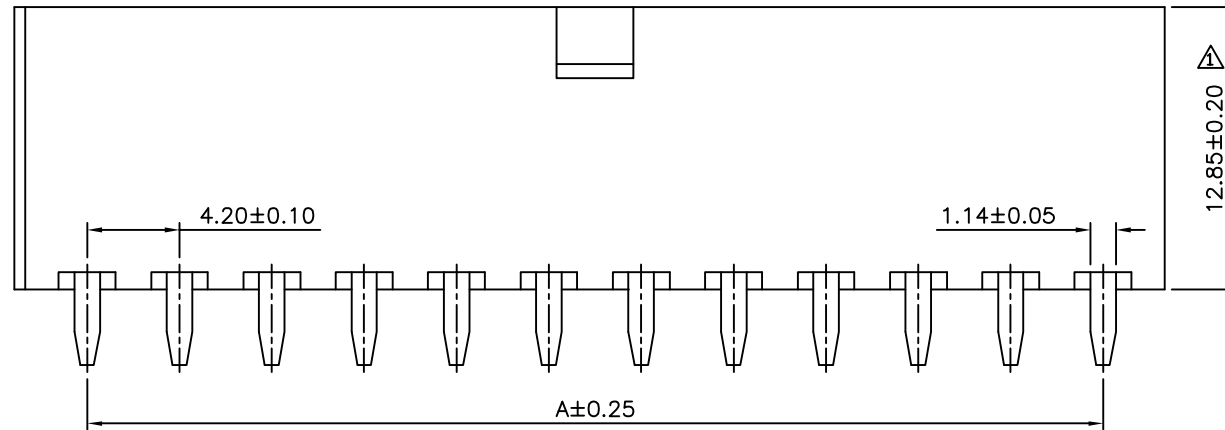


Recommended P.C.B. Layout

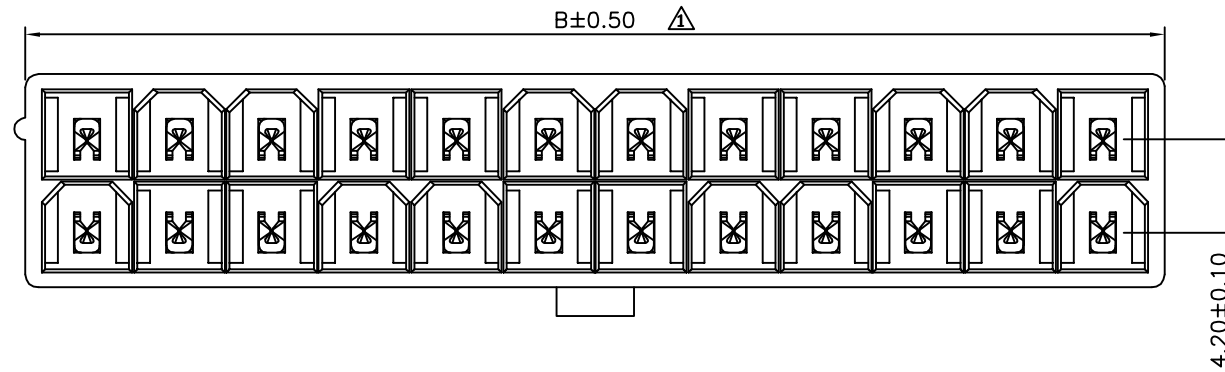


Pin	A	B
02	--	5.60
04	4.20	9.80
06	8.40	14.00
08	12.60	18.20
10	16.80	22.40
12	21.00	26.60
14	25.20	30.80
16	29.40	35.00
18	33.60	39.20
20	37.80	43.40
22	42.00	47.60
24	46.20	51.80

SPECIFICATION
 Current Rating:7A AC/DC
 Voltage Rating:250V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:10 Milliohms Max.
 Operation Temperature:-25°C~+85°C
 Insulator:PA66(UL94V-2)
 Contact:Brass,Tin Plated
 RoHS Compliant

MF 2 X XX PD - H
 (1) (2) (3) (4) (5)

- (1) MF:4.2 Mini-Fit
- (2) 2: Dual Row
- (3) XX: No. Of Position/Per Row
- (4) PD: Male DIP Straight Without Mounting Ear Without Post
- (5) H: RoHS Compliant

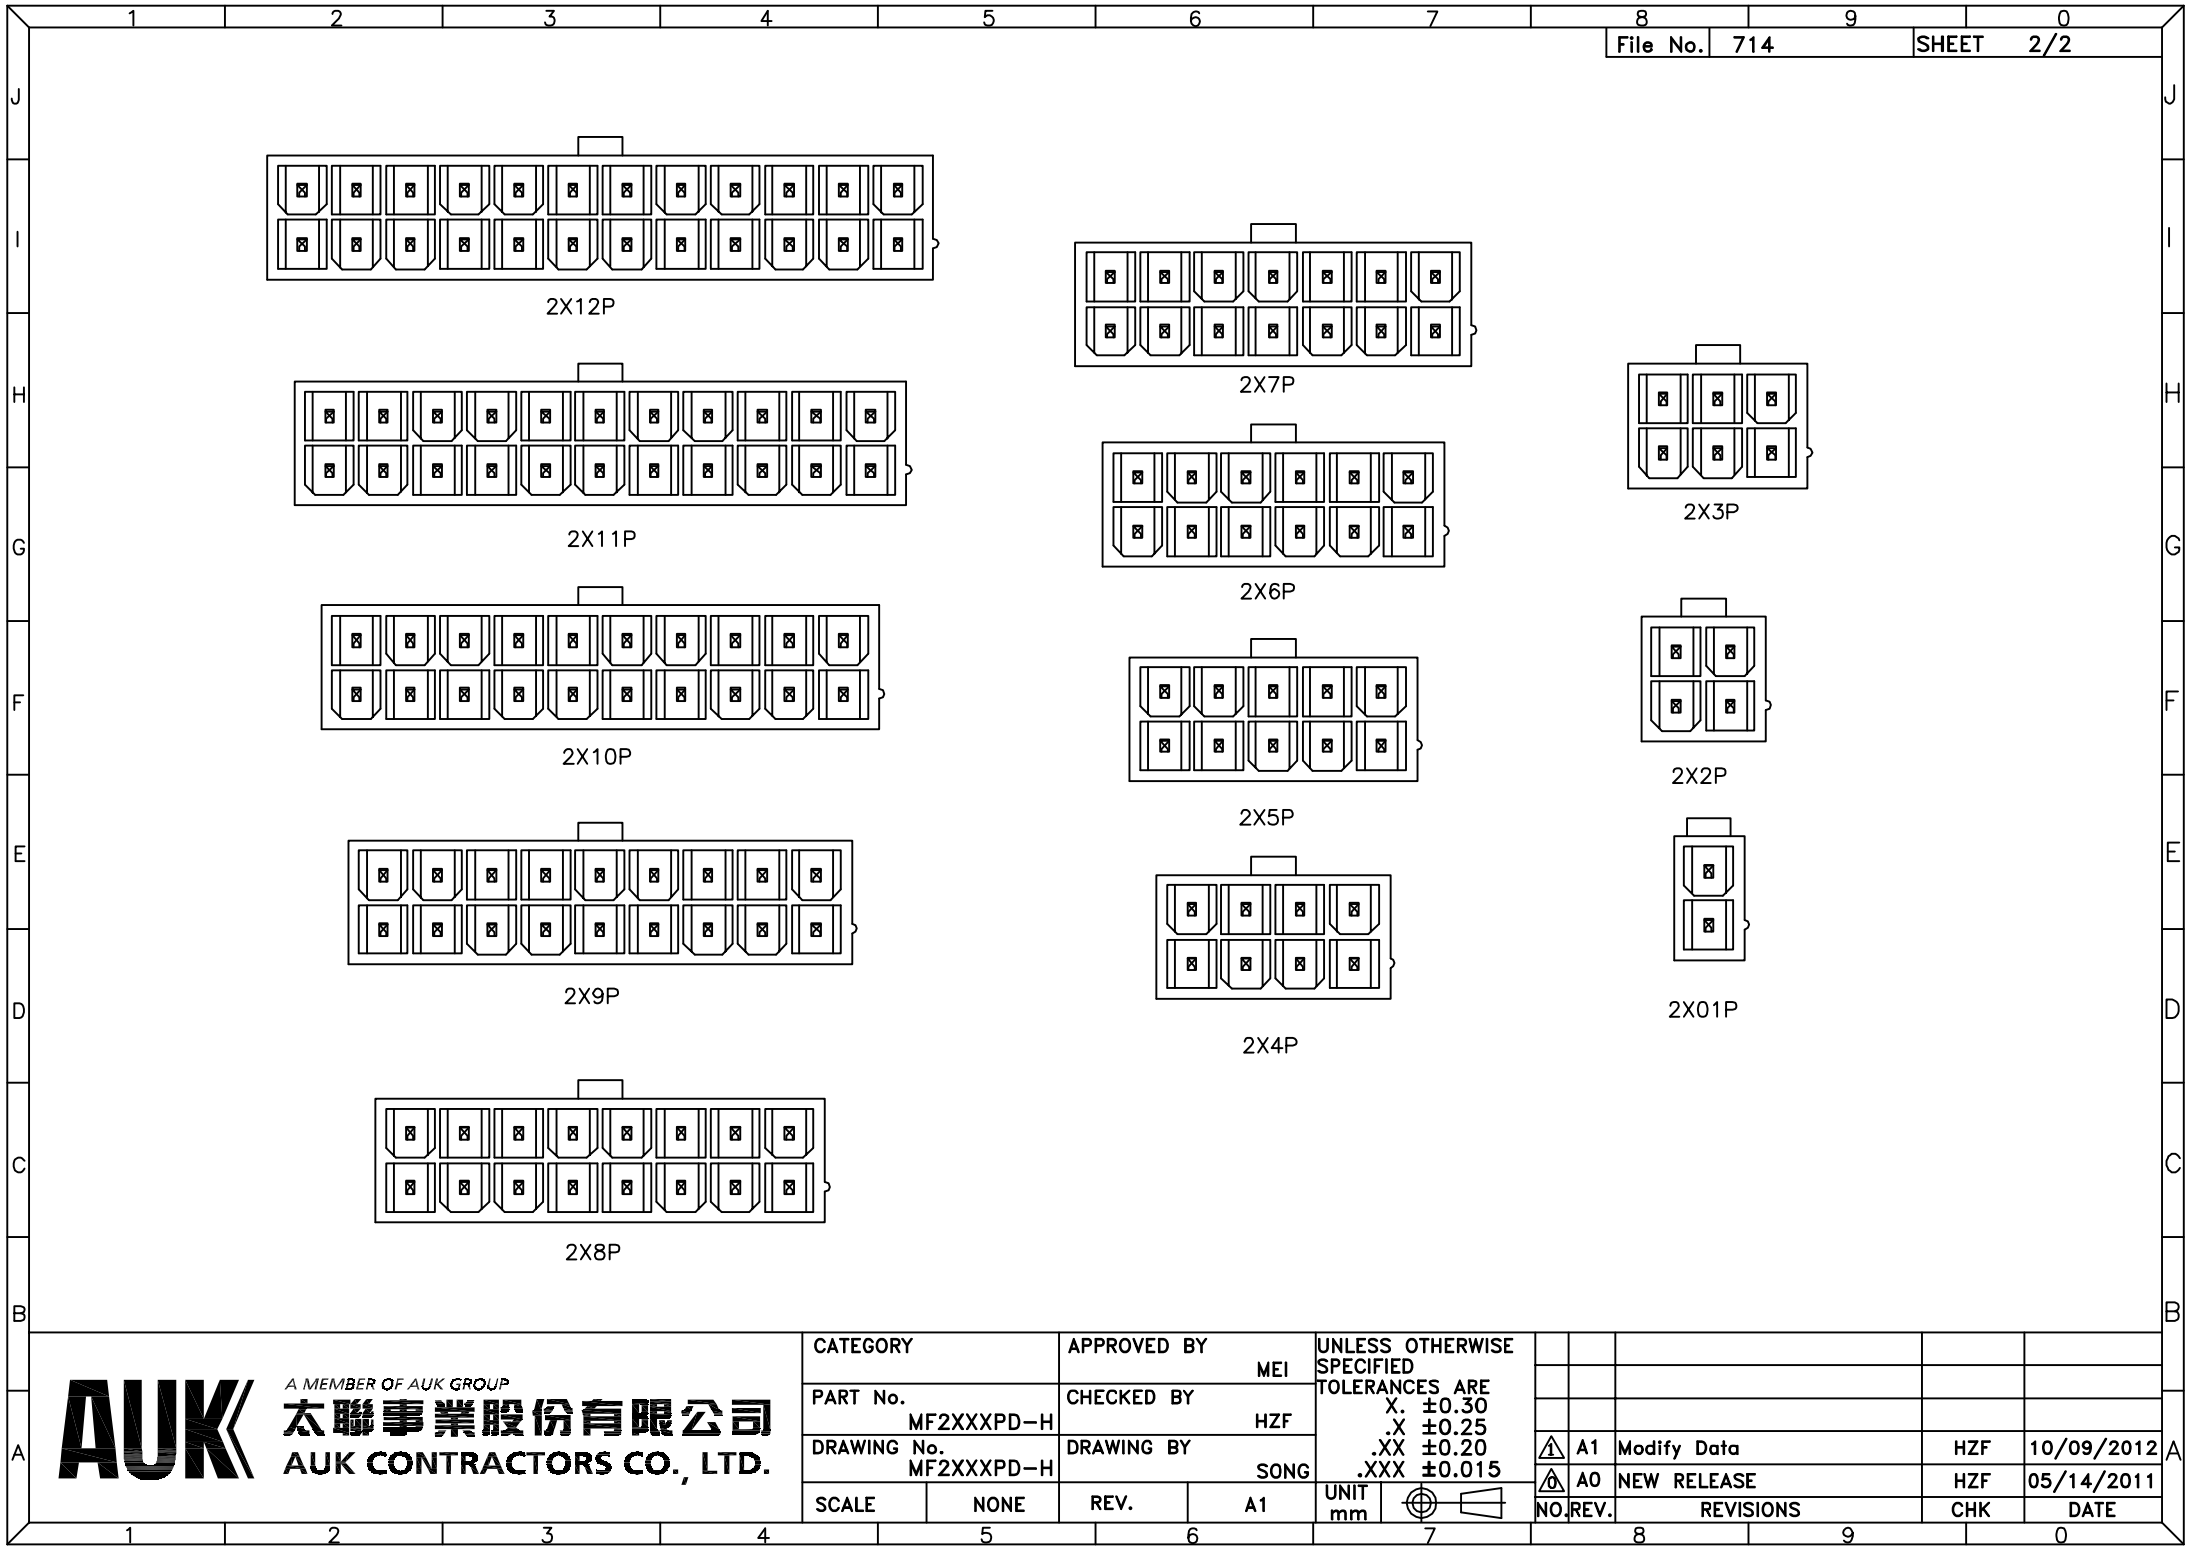

CATEGORY		APPROVED BY	
		MEI	
PART No.		CHECKED BY	
MF2XXXPD-H		HZF	
DRAWING No.		DRAWING BY	
MF2XXXPD-H		SONG	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X. ±0.30	
.X ±0.25	
.XX ±0.20	
.XXX ±0.015	
UNIT	mm

△	A1	Modify Data		HZF	10/09/2012
△	A0	NEW RELEASE		HZF	05/14/2011
NO.	REV.	REVISIONS		CHK	DATE