

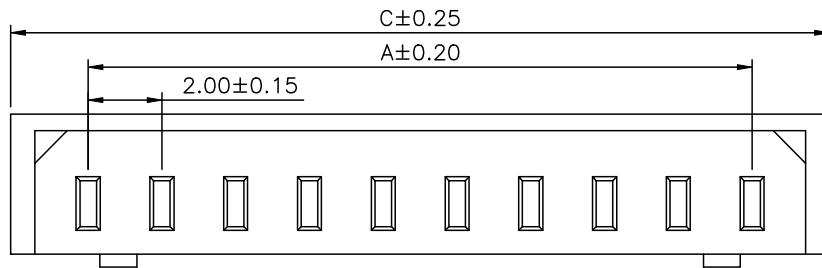

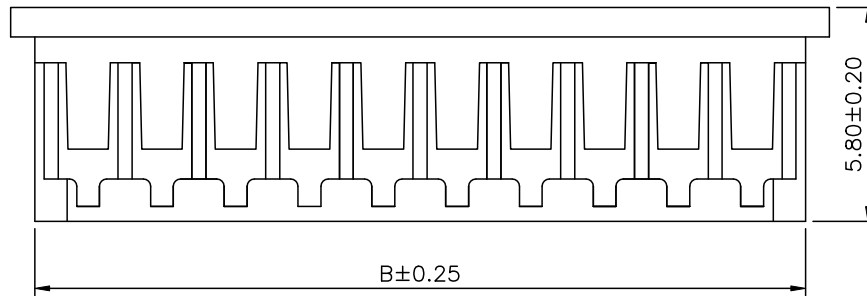


**△ SPECIFICATION**

Current Rating:1A AC/DC  
 Voltage Rating:125V AC/DC  
 Withstand Voltage:500V AC/Minute  
 Contact Resistance:20 Milliohms Max.  
 Insulation Resistance:1000 Megaohms Min.  
 Temperature Range:-20°C~+85°C  
 Insulator:PA66(UL94V-0)  
 RoHS Compliant

MH XX H - H  
 (1) (2) (3) (4)

- (1) MH:2.0mm MH Series
- (2) XX:No. Of Position
- (3) H:Female Housing
- (4) H:RoHS Compliant

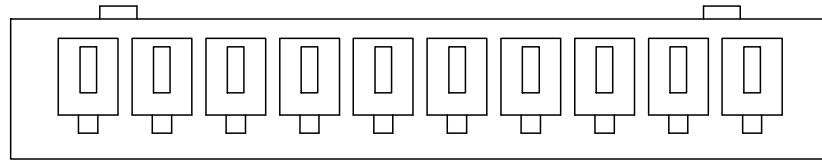

△△ 02~03P

△ 04~20P

△△ Pin	A	B	B
02	2.00	5.10	6.20
03	4.00	7.10	8.20
04	6.00	9.10	10.20
05	8.00	11.10	12.20
06	10.00	13.10	14.20
07	12.00	15.10	16.20
08	14.00	17.10	18.20
09	16.00	19.10	20.20
10	18.00	21.10	22.20
11	20.00	23.10	24.20
12	22.00	25.10	26.20
13	24.00	27.10	28.20
14	26.00	29.10	30.20
15	28.00	31.10	32.20

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △ X ±0.30 △ XX ±0.20 △ XXX ±0.10 ANG. ±2°			
PART No. MHXXH-H	CHECKED BY MEI		△ A2	Modify Data	HZF 11/29/2017
DRAWING No. MHXXH-H	DRAWING BY HZF		△ A1	Modify Data	HZF 04/29/2015
SCALE NONE	REV. A2		△ A0	NEW RELEASE	HZF 10/09/2014
		UNIT mm	NO. REV.	REVISIONS	CHK DATE