
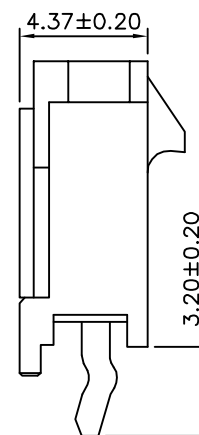
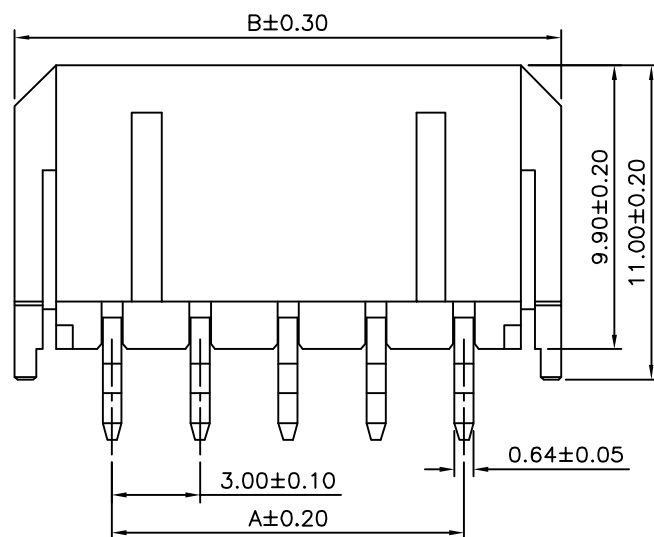


Recommended P.C.B. Layout

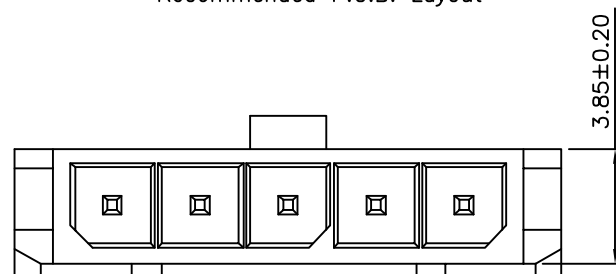

SPECIFICATION

1.General Characteristics

3.0mm Micro-Fit 1XXX Male DIP 180°
With Post Black Color

2.Material&Finish

△ Housing:PA66+15%G.F.(UL94V-0),Black
Contact:Brass,Tin Plated

3.Electrical Characteristics

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute

4.Environmental Characteristics

Temperature Range:-25°C~+85°C

5.RoHS Compliant

△ MIF 1 X XX P DP - H
(1) (2) (3) (4) (5) (6)

- (1) MIF:3.0mm Micro-Fit Series
(2) 1:Single Row
(3) XX:No. Of Position
(4) P:Male
(5) DP:DIP Straight With Post
(6) H:RoHS Compliant

Pin	A	B
02	3.00	9.65
03	6.00	12.65
04	9.00	15.65
05	12.00	18.65
06	15.00	21.65
07	18.00	24.65
08	21.00	27.65
09	24.00	30.65
10	27.00	33.65
11	30.00	36.65
12	33.00	39.65



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

EMILY

PART No.
MIF1XXXPDP-H

CHECKED BY

HZF

DRAWING No.
MIF1XXXPDP-H

DRAWING BY

SONG


SCALE

NONE

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT
mm

△ A1

Modify Data

HZF

10/22/2013

△ A0

NEW RELEASE

HZF


10/23/2012

NO. REV.


REVISIONS

CHK


DATE




1X04P



1X03P



1X02P

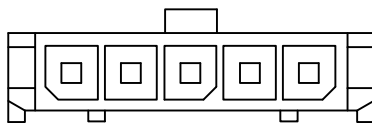

1X05P



	A1	Modify Data	HZF	10/22/2013
	A0	NEW RELEASE	HZF	10/23/2012
NO.	REV.	REVISIONS	CHK	DATE