

SPECIFICATION

1.General Characteristics

3.0mm Micro Fit 1XXX SMT 180°
Wafer Shell Tab:SMT

2.Material&Finish

Pin:Brass,Matte Tin Plated
Base:LCP(UL94V-0),Black


3.Electrical Characteristics

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstanding Voltage:1500V AC/Minute


4.Environmental Characteristics

Temperature Range: -25°C~+85°C

5.RoHS Compliant

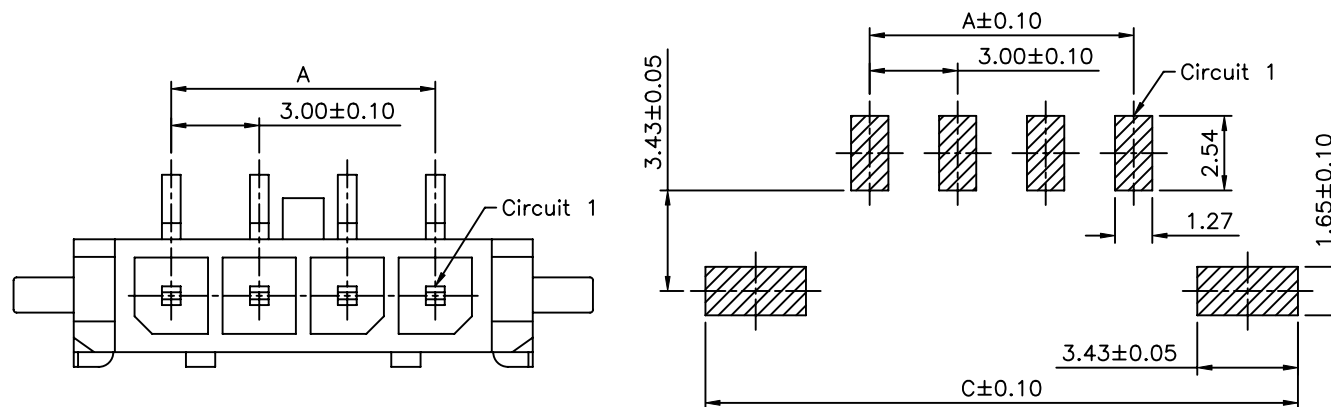

Recommended P.C.B. Layout

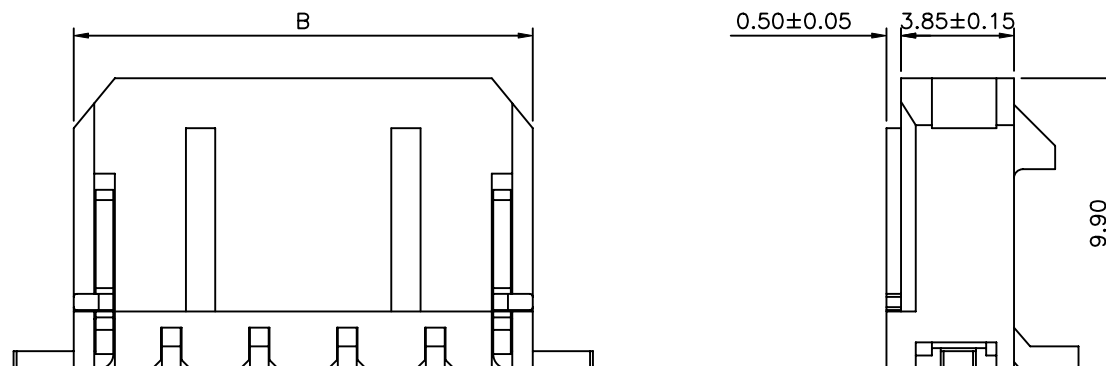

Circuit	A	B	C
2	3.00	9.65	14.20
3	6.00	12.65	17.20
4	9.00	15.65	20.20
5	12.00	18.65	23.20
6	15.00	21.65	26.20
7	18.00	24.65	29.20
8	21.00	27.65	32.20
9	24.00	30.65	35.20
10	27.00	33.65	38.20
11	30.00	36.65	41.20
12	33.00	39.65	44.20



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

MEI

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

PART No.
MIF1XXXPV-H

CHECKED BY

HZF

DRAWING No.
MIF1XXXPV-H

DRAWING BY

QQJ


.X ±0.50
.XX ±0.25
.XXX ±0.10
ANG. ±2°

SCALE

NONE

REV.

A0

UNIT
mm

NO. REV.

A0 NEW RELEASE

REVISIONS


HZF

CHK


03/29/2010

DATE


	1	2	3	4	5	6	7	8	9	0
								File No.	472	SHEET 2/2
J										
I										
H										
G										
F										
E										
D										
C										
B										
A										




2P




6P




3P




7P




10P




4P




8P




11P



5P



9P



12P



A MEMBER OF AUK GROUP

太聯事業股份有限公司

AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.50 .XX ±0.25 .XXX ±0.10 ANG. ±2°							
		MEI									
PART No.		CHECKED BY									
MIF1XXXPV-H		HZF									
DRAWING No.		DRAWING BY									
MIF1XXXPV-H		QQJ									
SCALE	NONE	REV.	A0	UNIT			A0	NEW RELEASE		HZF	03/29/2010
				mm			NO.REV.	REVISIONS		CHK	DATE