
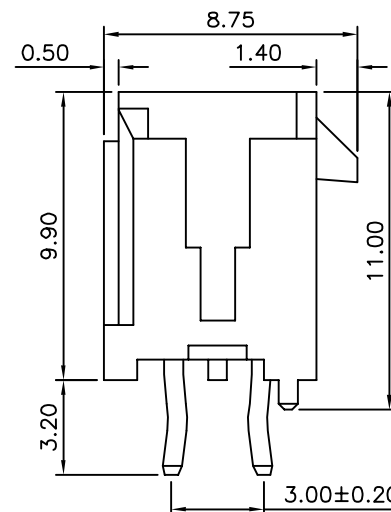
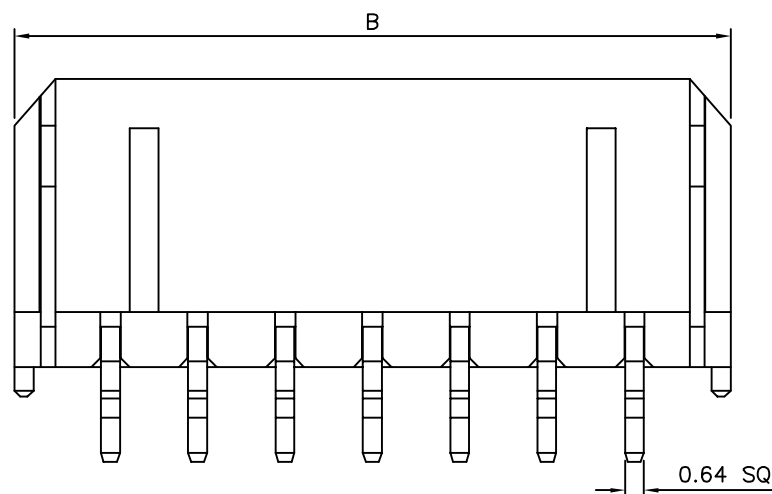
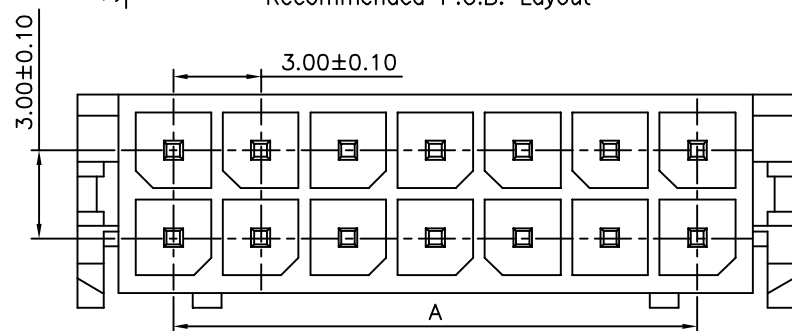


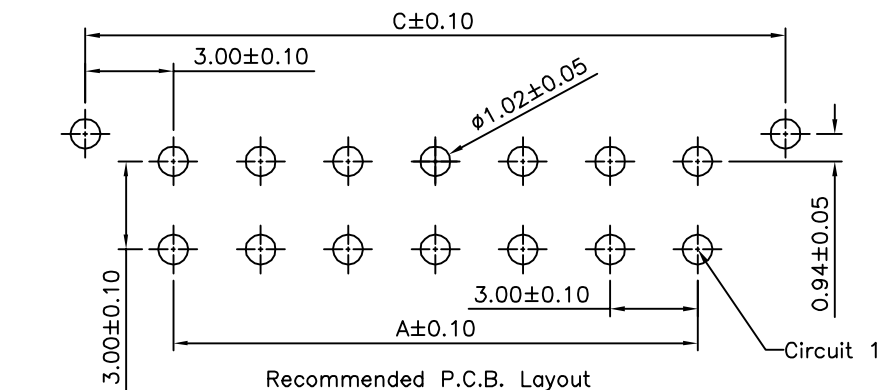

SPECIFICATION

1.General Characteristics

3.0mm Micro-Fit Wafer 2XXX DIP 180° With Post Black Insulator Tin Plated

2.Material&Finish

Housing:PA66(UL94V-0),Black

Terminal:Brass,Tin Plated

3.Electrical Characteristics

Current Rating:5A AC/DC

Voltage Rating:250V AC/DC

Contact Resistance:10 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Dielectric Voltage:1500V AC/Minute

4.Environmental Characteristics

Temperature Range: -25°C~+85°C

5.RoHS Compliant

MIF 2 X XX P DP - H
(1) (2) (3) (4) (5) (6)

(1) MIF:3.0mm Micro-Fit Series

(2) 2: Dual Row

(3) XX: No. Of Position/Per Row

(4) P: Male

(5) DP: DIP Straight With Post

(6) H: RoHS Compliant

Pin	A	B	C
2	—	6.65	6.00
4	3.00	9.65	9.00
6	6.00	12.65	12.00
8	9.00	15.65	15.00
10	12.00	18.65	18.00
12	15.00	21.65	21.00
14	18.00	24.65	24.00
16	21.00	27.65	27.00
18	24.00	30.65	30.00
20	27.00	33.65	33.00
22	30.00	36.65	36.00
24	33.00	39.65	39.00



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

EMILY

PART No.

MIF2XXXPDP-H

CHECKED BY

HZF

DRAWING No.

MIF2XXXPDP-H

DRAWING BY

CYP

SCALE

NONE

REV.

B0

UNLESS OTHERWISE

SPECIFIED

TOLERANCES ARE

.X ± 0.50

.XX ± 0.25

.XXX ± 0.10

ANG. $\pm 2^\circ$

UNIT

mm



BO

NEW RELEASE

HZF


01/17/2015

NO. REV.

REVISIONS

CHK

DATE

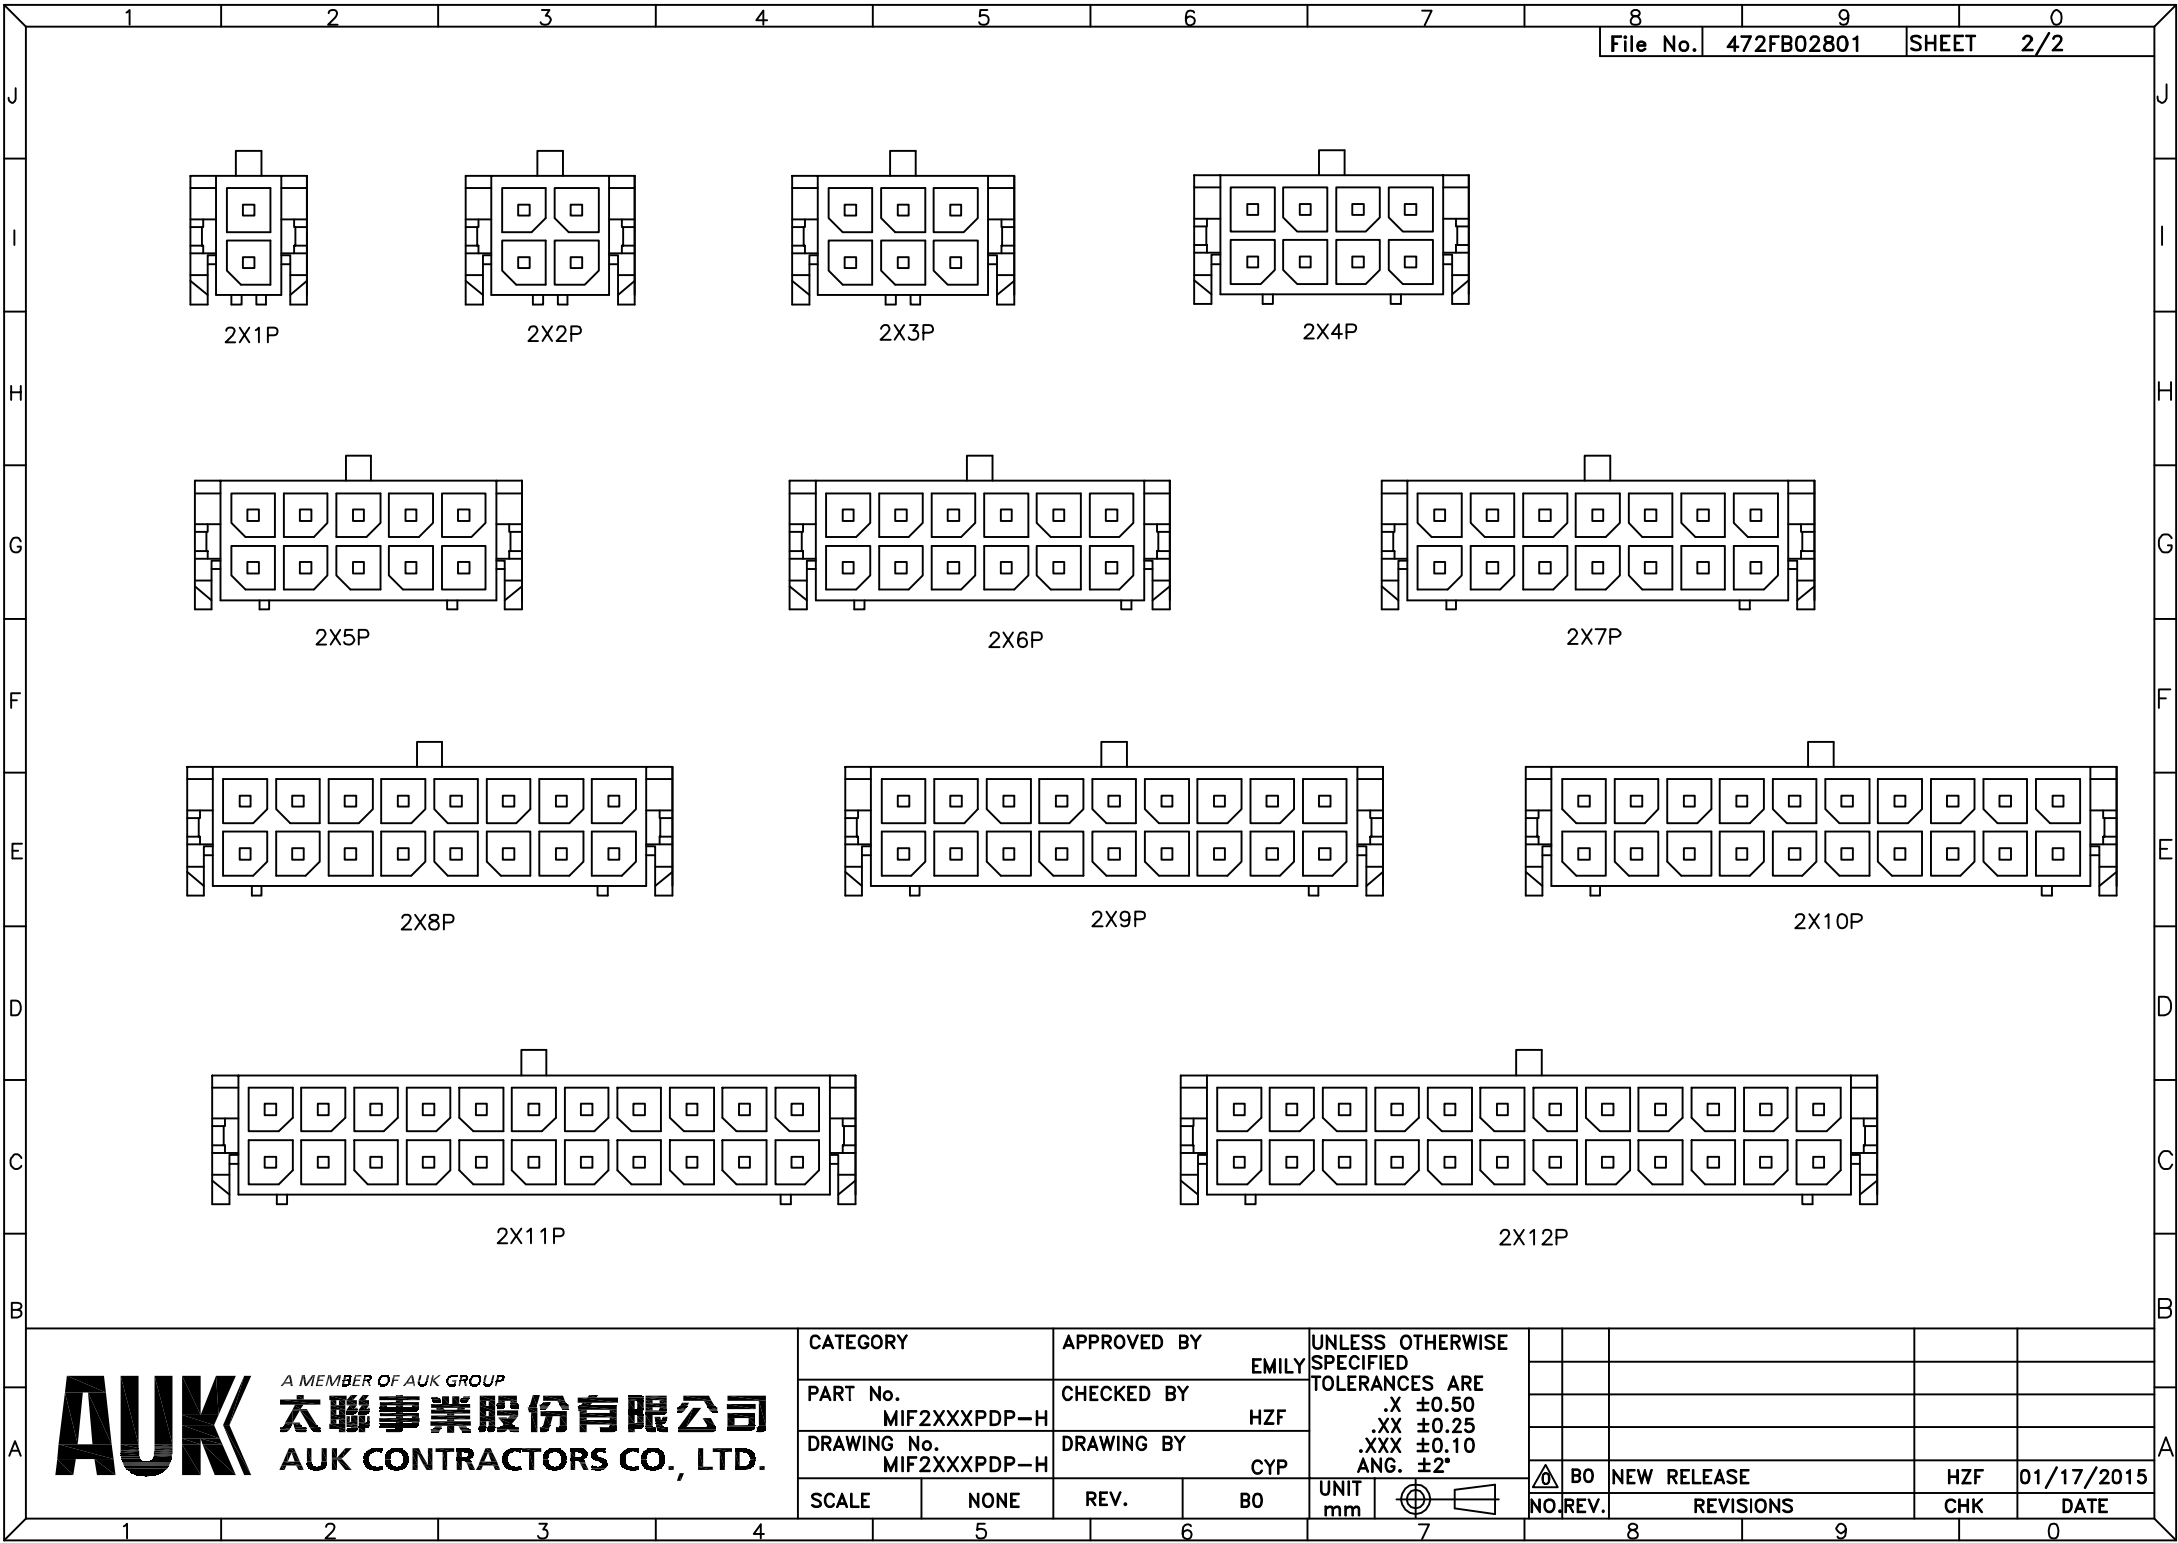

A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY EMILY	
PART No. MIF2XXXPDP-H		CHECKED BY HZF	
DRAWING No. MIF2XXXPDP-H		DRAWING BY CYP	
SCALE	NONE	REV.	B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.50
.XX ±0.25
.XXX ±0.10
ANG. ±2°

	BO	NEW RELEASE	HZF	01/17/2015
NO.	REV.	REVISIONS	CHK	DATE