

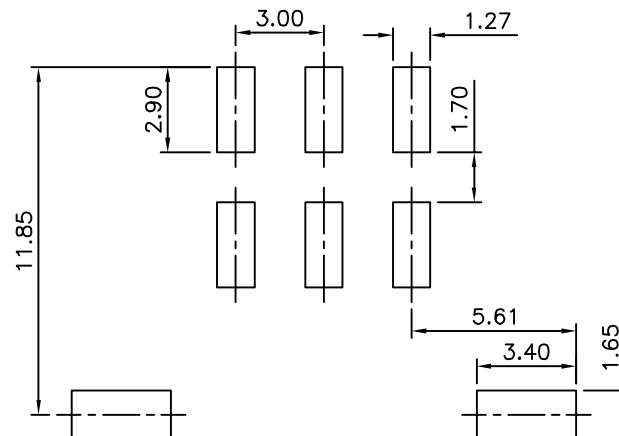
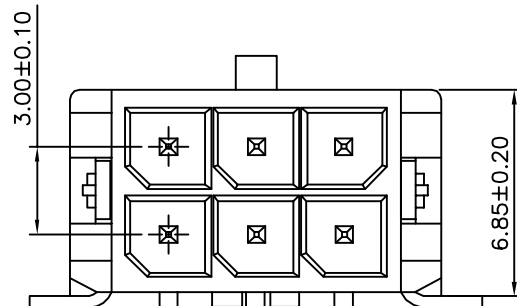


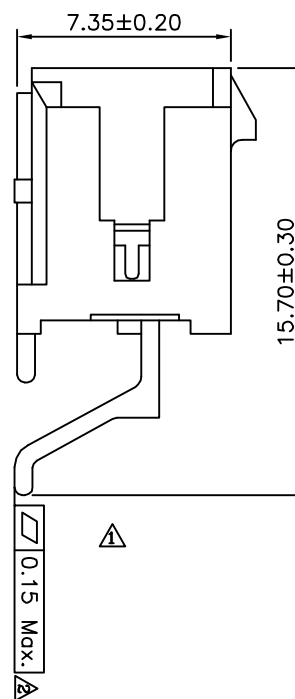

Recommended P.C.B. Layout

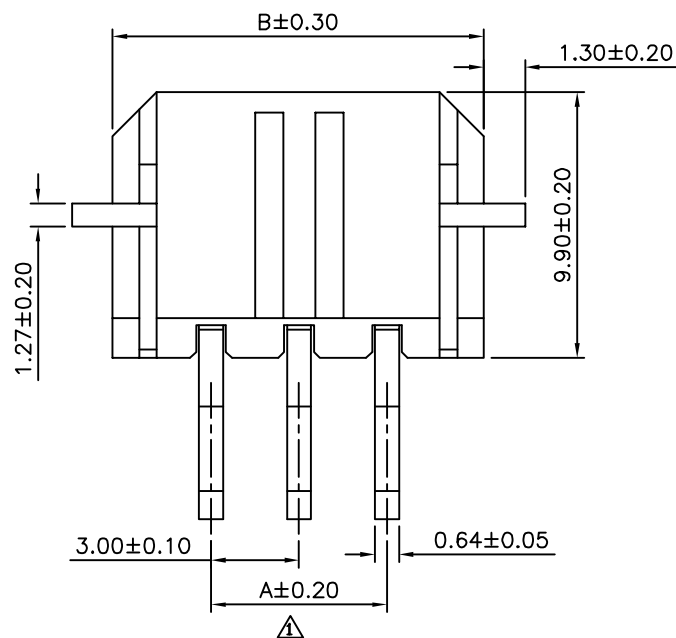

SPECIFICATION

1.General Characteristics

3.0mm Micro-Fit Wafer 2XXX SMT 90°
Fitting Nail:SMT Black Insulator Tin Plated
Tape&Reel 200 PCS/Reel

2.Material&Finish

Insulator:LCP(UL94V-0),Black
Contact:Brass,Tin Plated

3.Electrical Characteristics

Current Rating:5A AC/DC
Voltage Rating:250V AC/DC
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Withstand Voltage:1500V AC/Minute

4.Environmental Characteristics

Temperature Range:-25°C~+85°C

5.RoHS Compliant

MIF 2 X XX P W - R2H - H
(1) (2) (3) (4) (5) (6) (7)

- (1) MIF:3.0mm Micro-Fit Series
(2) 2: Dual Row
(3) XX: No. Of Position/Per Row
(4) P: Male
(5) W: SMT Right Angle Fitting Nail: SMT
(6) R2H: Tape&Reel 200 PCS/Reel
(7) H: RoHS Compliant

Pin	A	B
2	--	6.65
4	3.00	9.65
6	6.00	12.65
8	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY

APPROVED BY

EMILY

PART No. MIF2XXXPW-R2H-H

CHECKED BY

HZF

DRAWING No. MIF2XXXPW-R2H-H

DRAWING BY

CYP

SCALE

NONE

REV.

A2


UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.30

.X ±0.25

.XX ±0.20

.XXX ±0.015

UNIT
mm

A2

Modify P/N:MIF2XXXPW-RXXX-H
--> MIF2XXXPW-R2H-H

HZF

12/15/2014

A1

Modify Data

HZF

05/26/2014

A0

NEW RELEASE

HZF


06/23/2013

NO. REV.

REVISIONS

CHK

DATE

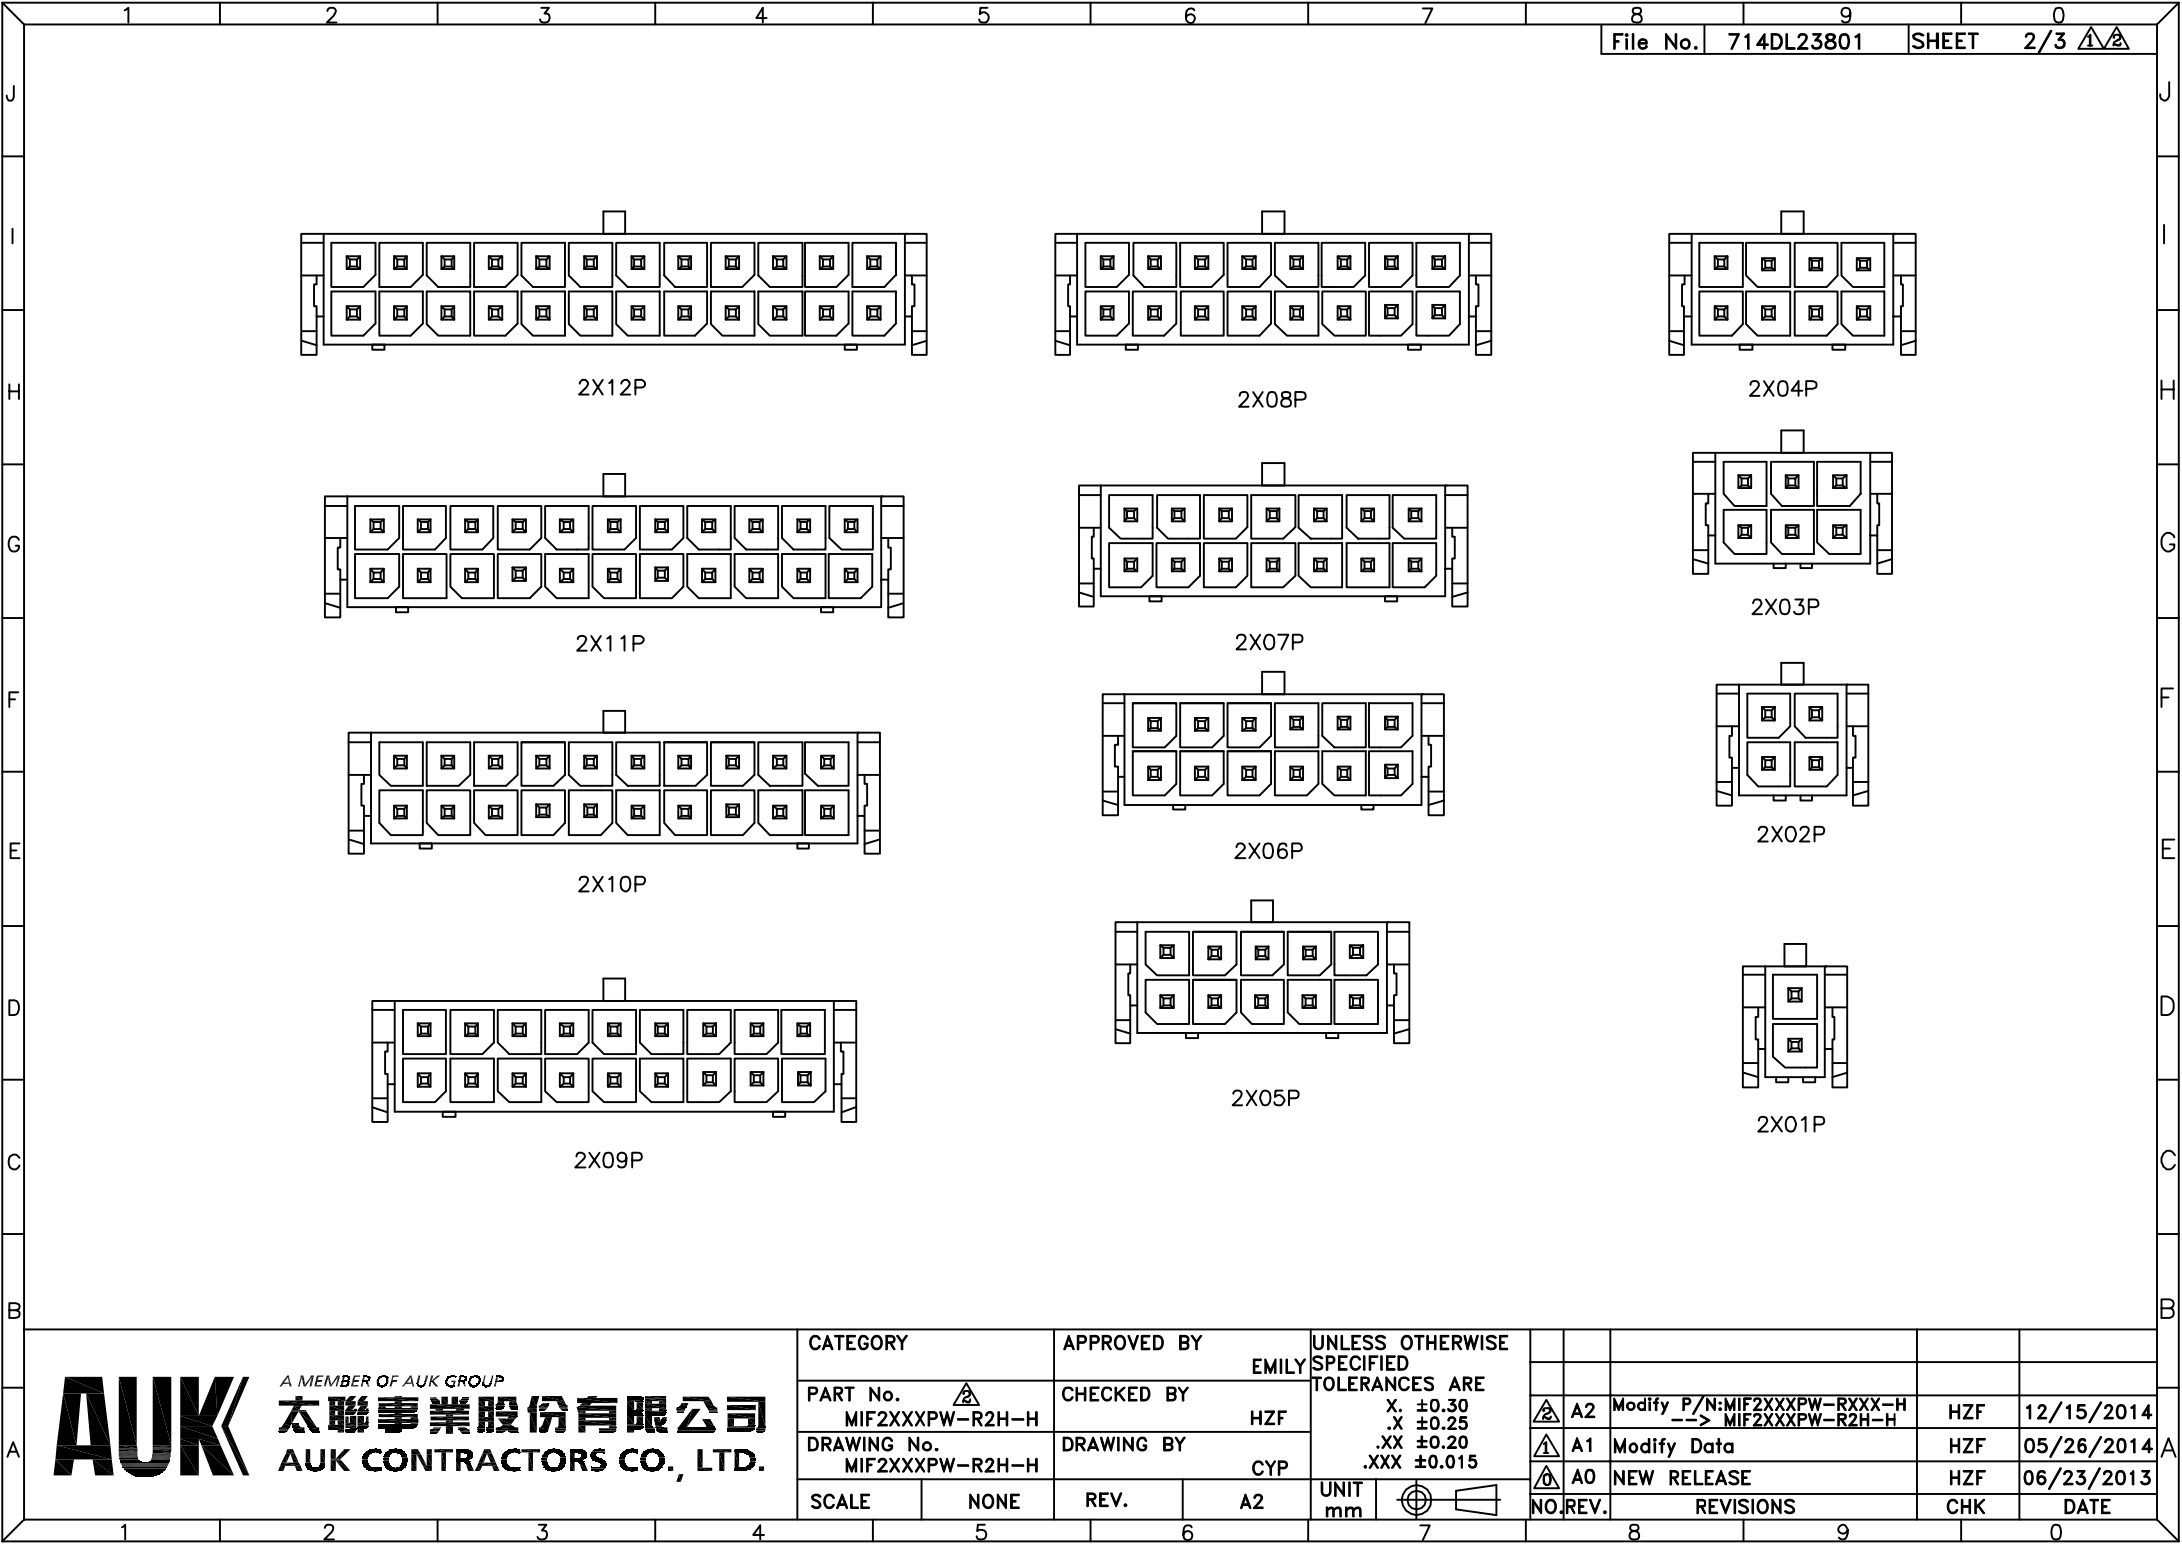


AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	
PART No.		EMILY	
MIF2XXXPW-R2H-H		CHECKED BY	
DRAWING No.		HZF	
MIF2XXXPW-R2H-H		DRAWING BY	
SCALE		CYP	
NONE		REV.	
		A2	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.	±0.30
.X	±0.25
.XX	±0.20
.XXX	±0.015
UNIT	mm

△	A2	Modify P/N:MIF2XXXPW-RXXX-H --> MIF2XXXPW-R2H-H	HZF	12/15/2014	
△	A1	Modify Data	HZF	05/26/2014	
△	A0	NEW RELEASE	HZF	06/23/2013	
NO.	REV.	REVISIONS	CHK	DATE	

SPECIFICATION
Q'ty:200 PCS/Reel
RoHS Compliant

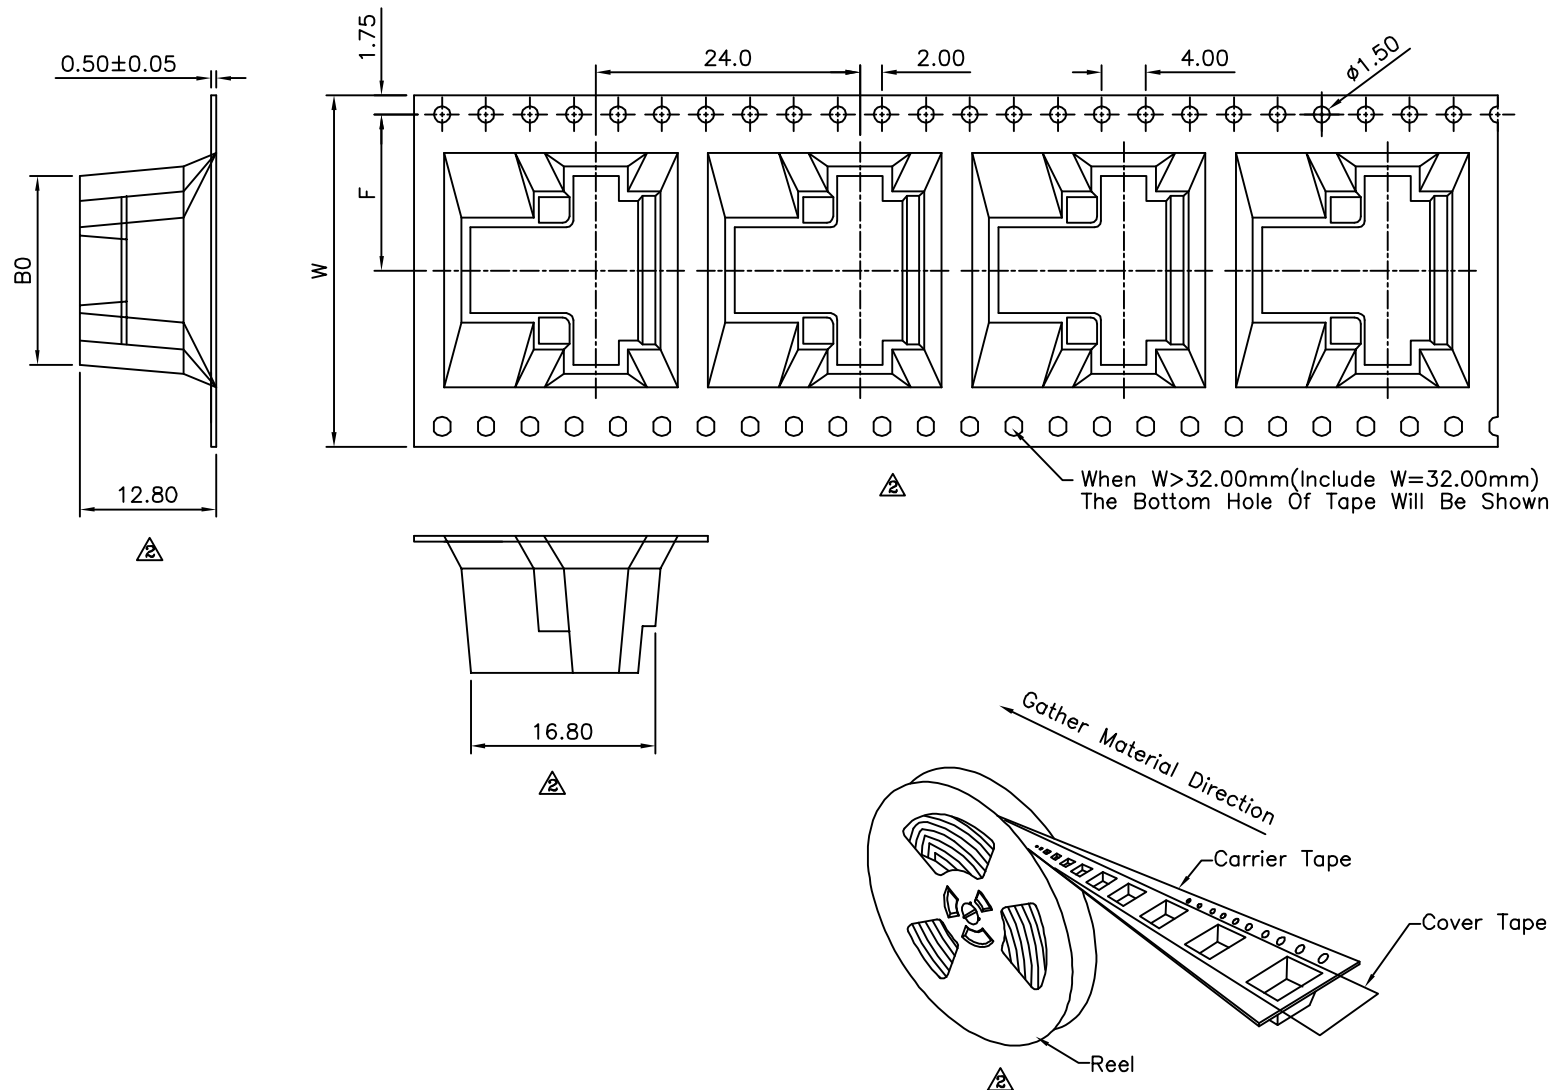

Pin	W	F	B0
02	24.0	11.50	11.0
04	32.0	14.20	13.90
06	32.0	14.20	16.90
08	44.0	20.20	20.50
10	44.0	20.20	22.90
12	44.0	20.20	25.90
14	44.0	20.20	28.90
16	56.0	26.00	31.80
22	56.0	26.00	40.85
24	72.0	34.00	44.20

CATEGORY		APPROVED BY EMILY	
PART No. MIF2XXXPW-R2H-H		CHECKED BY HZF	
DRAWING No. MIF2XXXPW-R2H-H		DRAWING BY CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.	±0.30
.X	±0.25
.XX	±0.20
.XXX	±0.015
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
A2		Modify P/N:MIF2XXXPW-RXXX-H --> MIF2XXXPW-R2H-H	HZF	12/15/2014
A1		Modify Data	HZF	05/26/2014
A0		NEW RELEASE	HZF	06/23/2013