File No.	432	SHEET	1/1

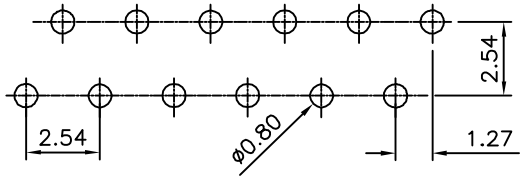

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance:±0.05)

SPECIFICATION
Current Rating:1.0 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−25°C~+85°C
Contact:Phosphor Bronze,Tin Plated Over Nickel
Insulator:PBT+15%G.F.(UL94V−0)
RoHS Compliant

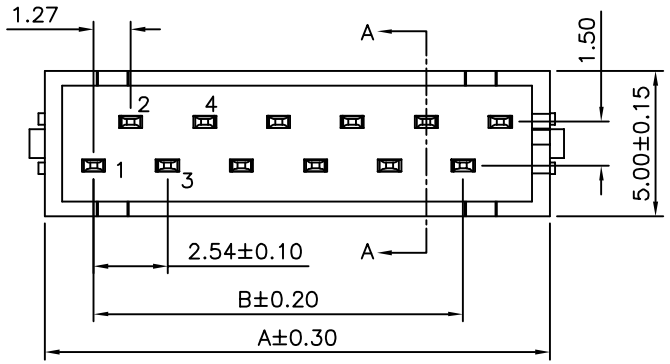



Section:A−A

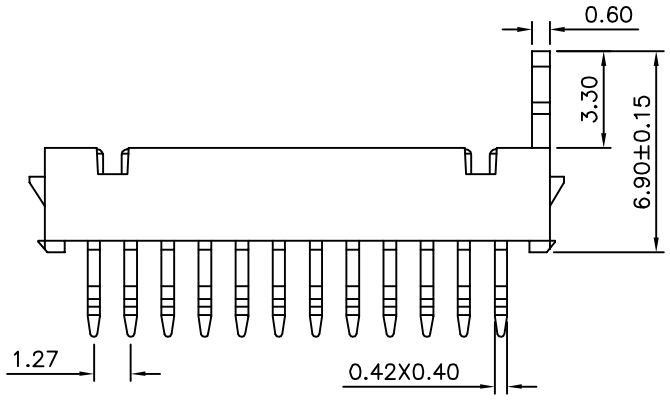

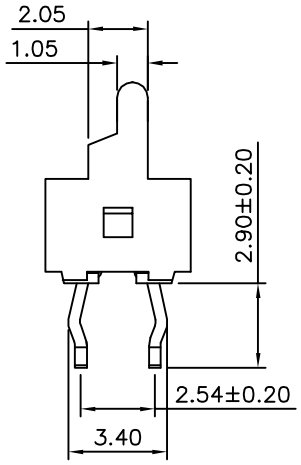

MIM XX BD −H
(1) (2) (3) (4)

(1) MIM:2.54mm Micro Match
(2) XX:No. Of Position
(3) BD:Male DIP Straight
(4) H:RoHS Compliant

Pin	A	B
4	7.20	2.54
6	9.74	5.08
8	12.28	7.62
10	14.82	10.16
12	17.63	12.70
14	19.90	15.24
16	22.44	17.78
18	24.98	20.32
20	27.52	22.86

A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY	EMILY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.25 .XX ±0.15 .XXX ±0.10 ANG. ±3°	
PART No.	MIMXXBD−H	CHECKED BY	HZF		
DRAWING No.	MIMXXBD−H	DRAWING BY	HTP		
SCALE	NONE	REV.	A0	UNIT mm	

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	08/13/2011