





SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Tin Plated Over Nickel
Insulator:PA46(UL94V-0)
RoHS Compliant

MIM XX SV - H
(1) (2) (3) (4)

- (1) MIM:2.54 Micro Match
- (2) XX:No. Of Position
- (3) SV:Female SMT Straight
- (4) H:RoHS Compliant

Recommended P.C.B. Layout(Top Side)
(PCB Board Tolerance±0.05)

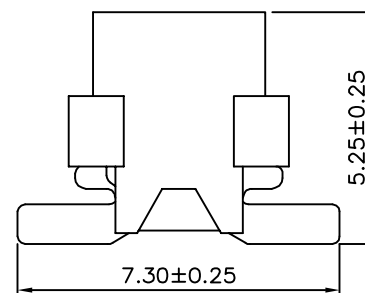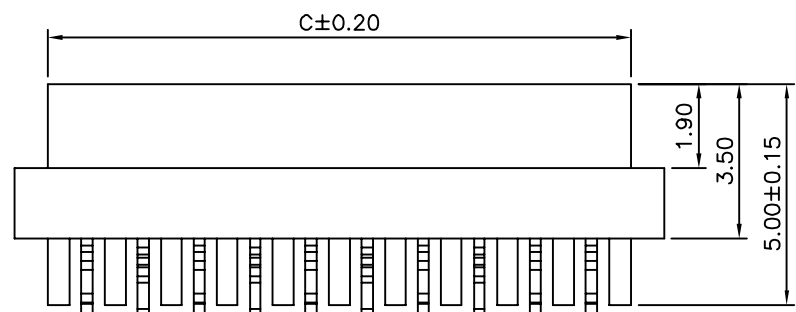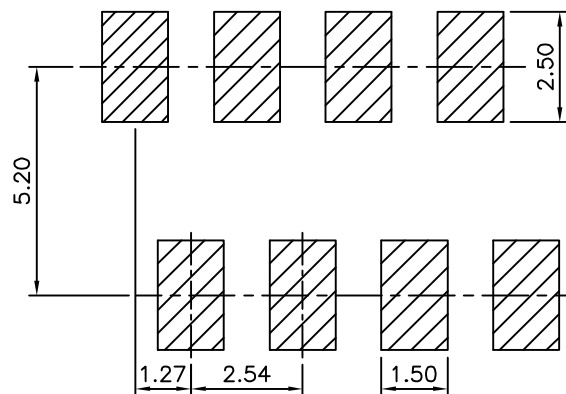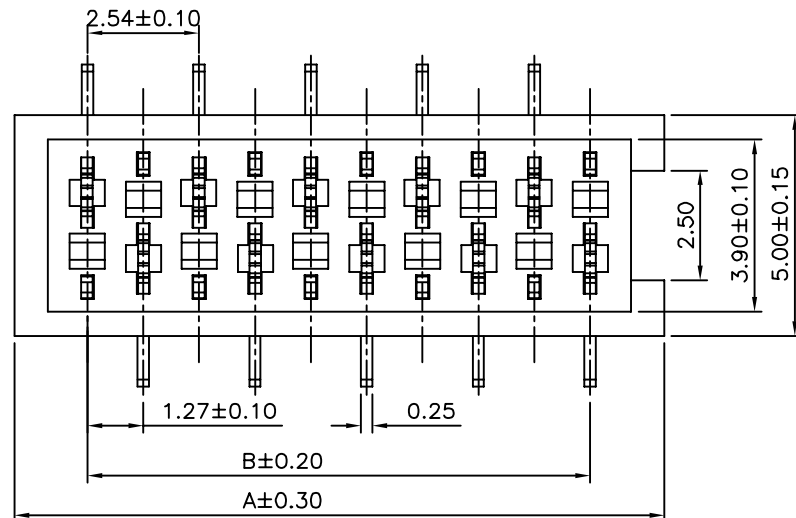

Pin	A	B	C
04	7.00	3.81	5.60
06	9.54	6.35	8.14
08	12.08	8.89	10.68
10	14.62	11.43	13.22
12	17.16	13.97	15.76
14	19.70	16.51	18.30
16	22.24	19.05	20.84
18	24.78	21.59	23.38
20	27.32	24.13	25.92



A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY	APPROVED BY	EMILY
PART No.	CHECKED BY	HZF
MIMXXSV-H	DRAWING No.	WSS
MIMXXSV-H	REV.	A0
SCALE	NONE	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°
UNIT mm

NO.	REV.	NEW RELEASE	HZF	07/13/2011
		REVISIONS	CHK	DATE